


SCIENTIFIC AMERICAN

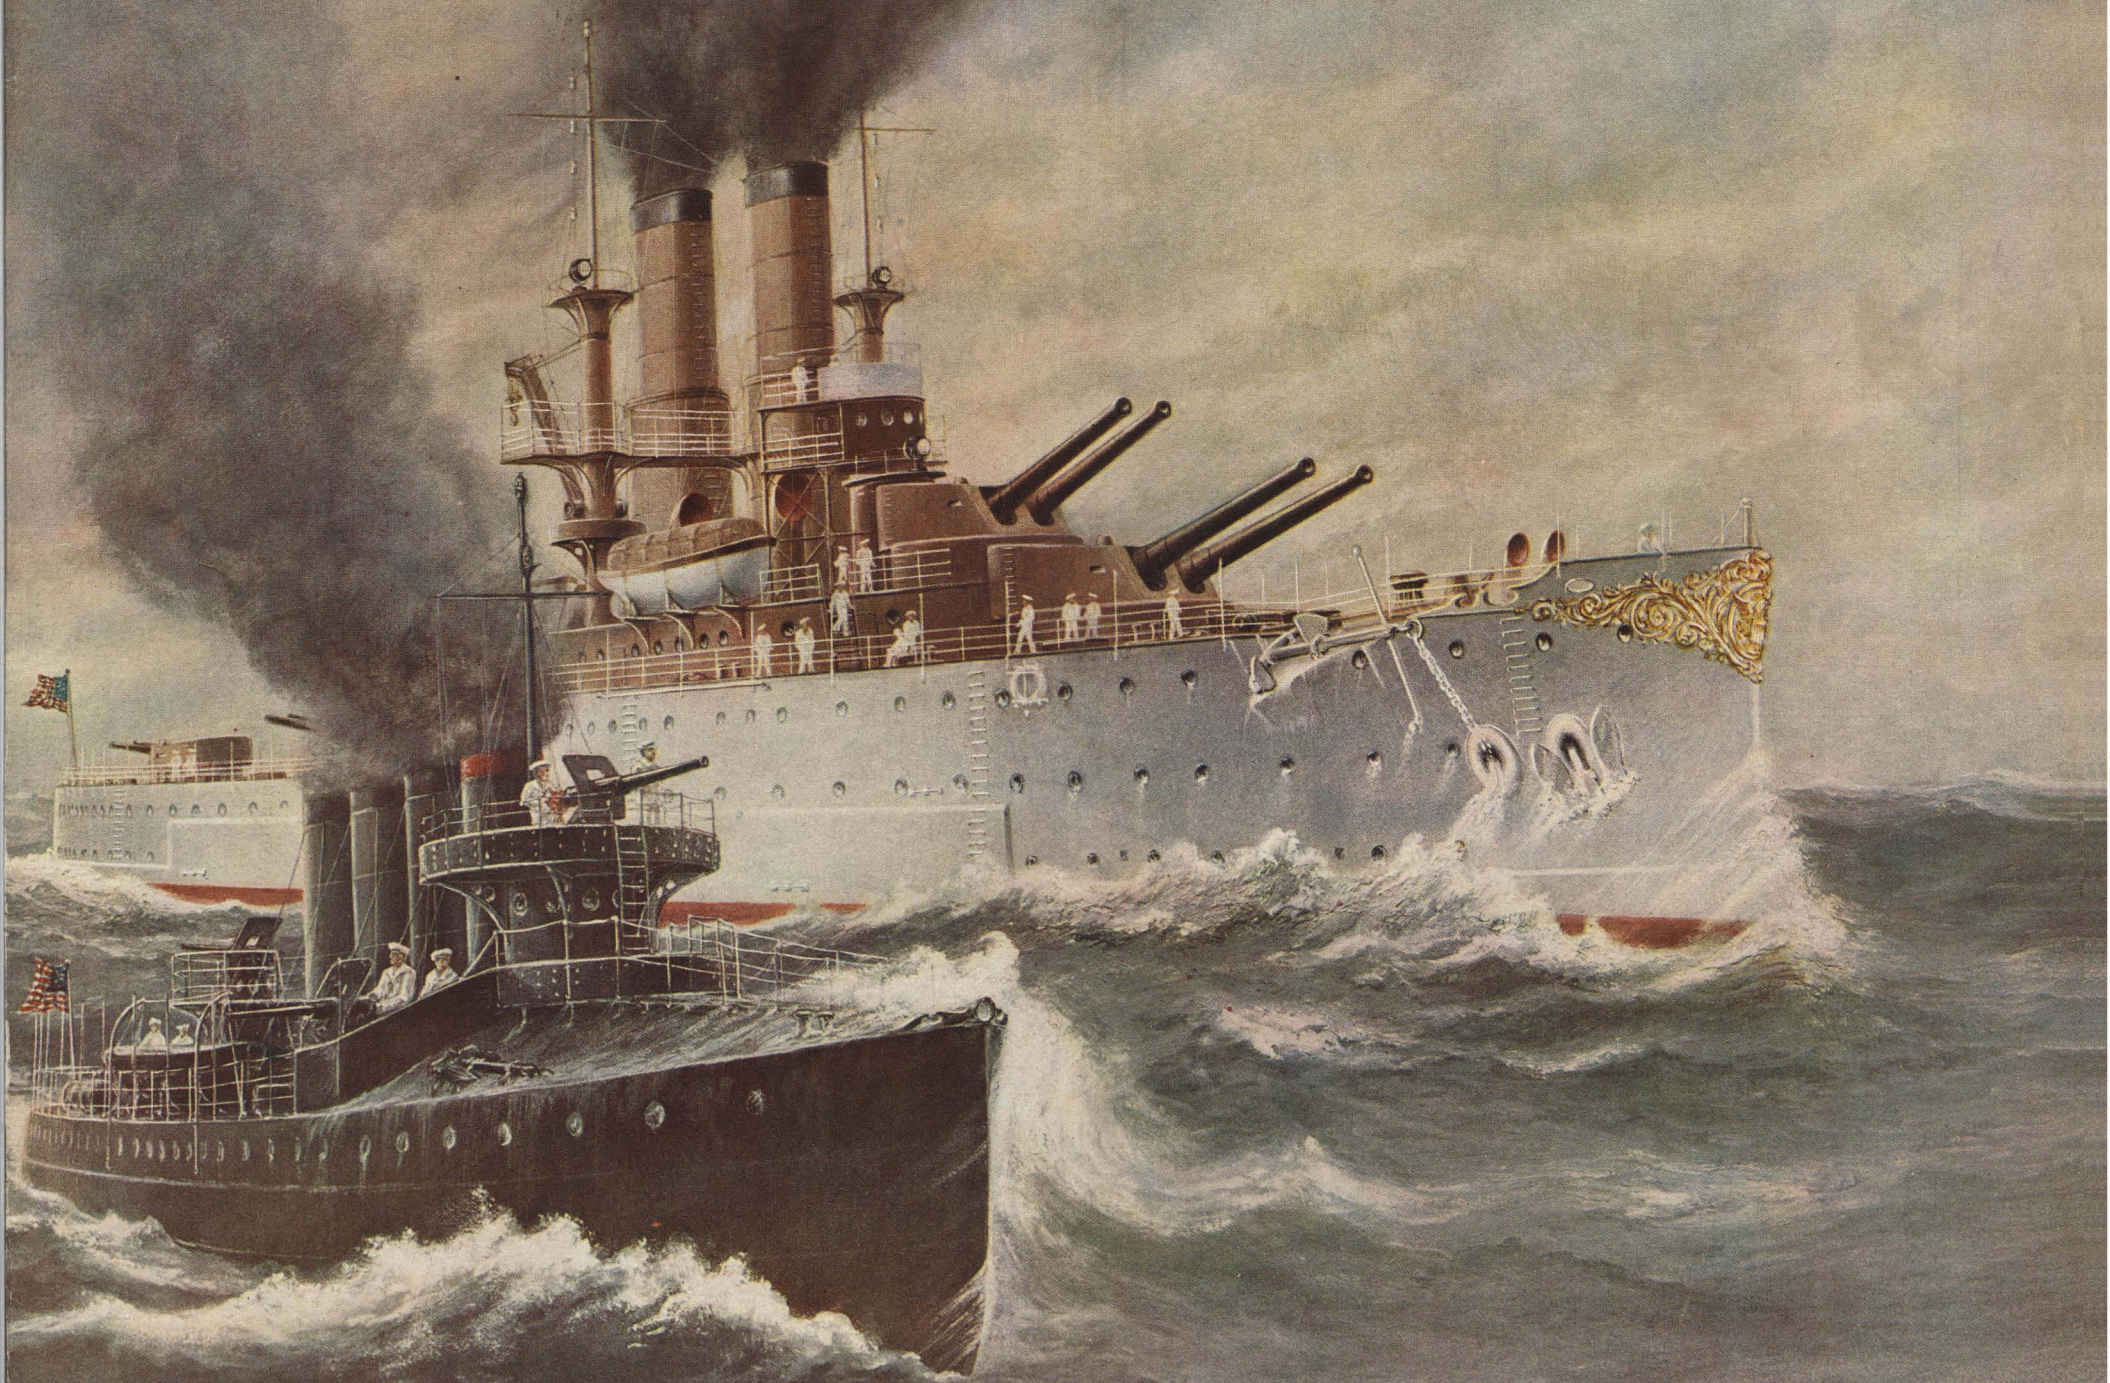

C. J. KNIGHT-SMITH
1907


TEN YEARS
OF THE
UNITED STATES NAVY
1897 — 1907

SCIENTIFIC AMERICAN,
— NEW YORK —

DECEMBER 7, 1907.
VOL. XCVII.— No. 23.

PUBLISHED BY
MUNN AND COMPANY
NEW YORK
COPYRIGHT, 1907, BY MUNN & COMPANY.

PRICE TEN CENTS

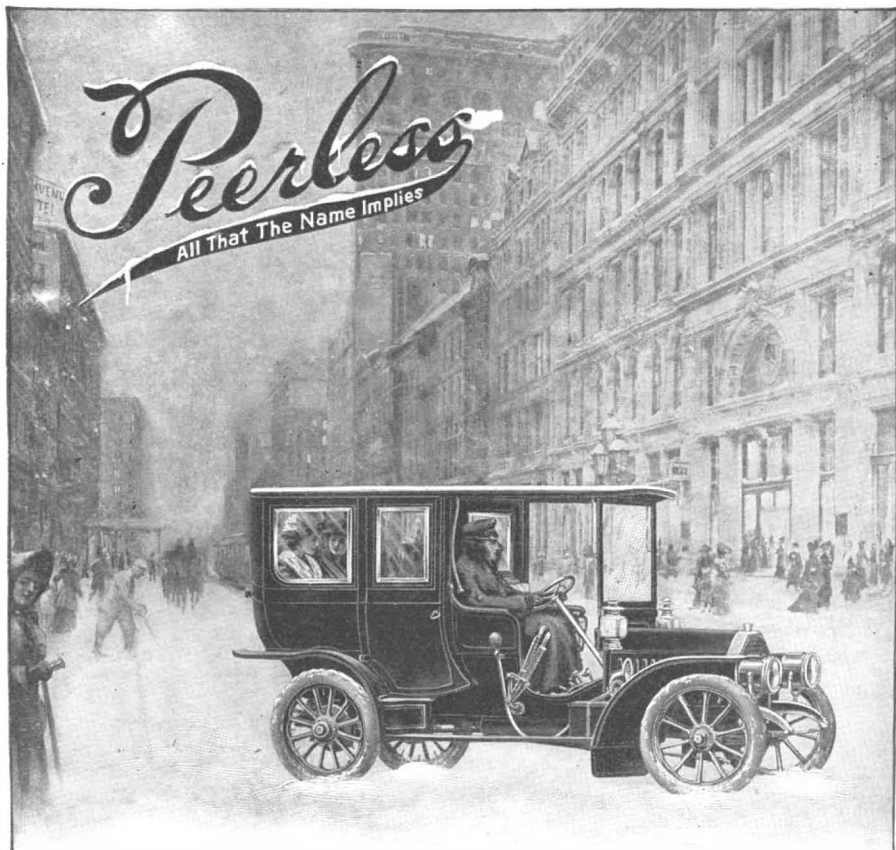

1908 Limousine

Maximum comfort and protection, together with beauty of contour and finish, places the Peerless Limousine in a class distinct from and above all other forms of conveyance for social and business intercourse.

The Peerless Limousine, planned and built on a high plane of excellence, is exclusive.


The best materials and most up-to-date appointments are used, making the car elegant in appearance and yet maintaining a quiet richness.

An investigation of the perfect Peerless Limousine will convince you that every feature has been thoughtfully and carefully worked out.

Write for our 1908 Catalogue "P" which fully describes and illustrates the Peerless Models.

PEERLESS MOTOR CAR CO., 2447 Oakdale St., Cleveland, O.

Member A.L.A.M.

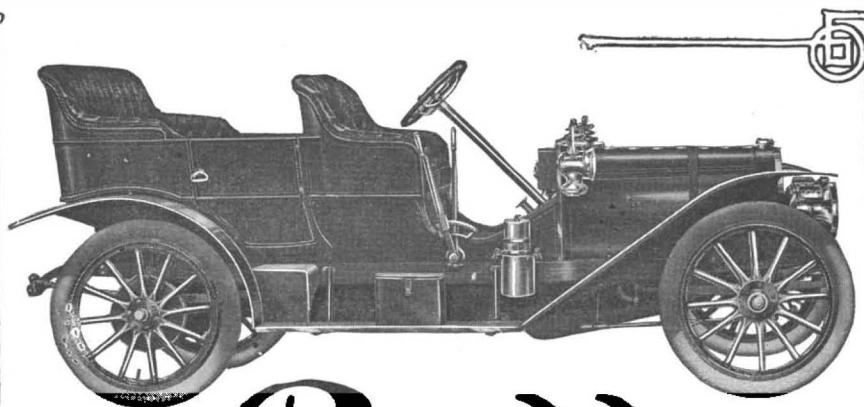

MODEL 34 Rambler \$2250.

IN THIS CAR is embodied every modern feature that has withstood the severe test of practical service and each has been refined and developed to the highest degree of mechanical perfection.

Through the offset crank shaft, straight line drive, direct from transmission gear to rear axle without an intervening joint, and ball or roller bearings at every point in the transmitting system, every ounce of cylinder pressure is delivered to the road wheels with the lowest possible loss in efficiency.

Equal improvements have been made in accessibility, comfort and outward appearance, and we guarantee this car to be equal in practical value to any car in the market, regardless of price.

We invite your most thorough examination, positive that it will convince you of the superiority of our product.

Our advance catalog, describing in detail this car both as touring car and roadster and the new utility car, Model 31, is at your disposal; write for it now.

Thomas B. Jeffery & Company
Main Office and Factory, Kenosha, Wis.

Branches and Distributing Agencies:—Chicago, Milwaukee, Boston, Philadelphia, San Francisco. Representatives in all leading cities.



Typewriters come and go,
but the machine that always
stays, always leads, always
improves, always outwears,
and always outsells all others
is the


Remington

Remington Typewriter Company
(Incorporated)
New York and Everywhere

Floors



Roofs

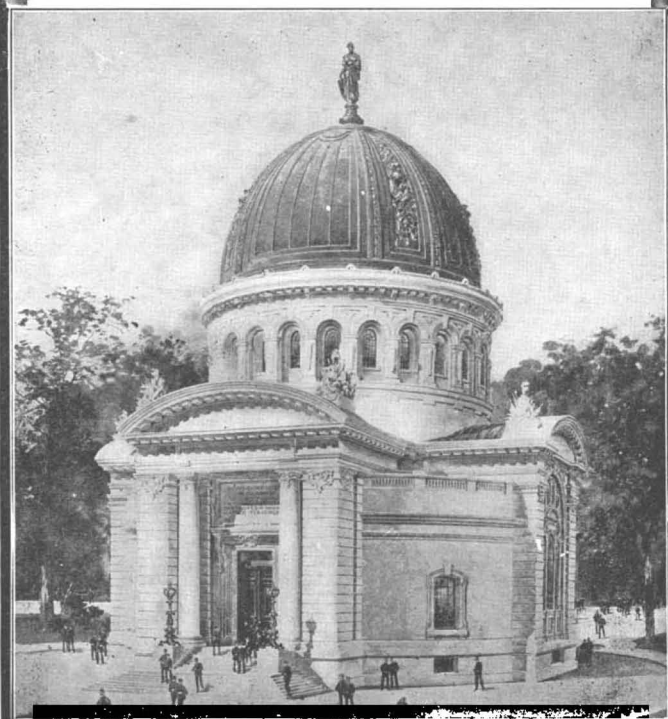

Maine Memorial Chapel, U. S. Naval Academy, Annapolis, Md.
ERNEST FLAGG, New York. Architect. NOEL CONSTRUCTION CO., Baltimore, Md., Builders.
OLIVER & BURR, New York, Contractors for Furring and Lathing.

All furrings for arches, groins, panels, cornices, etc., covered with Clinton Wire Lath, galvanized after weaving.

This is the ONLY lath guaranteed against corrosion.

IT COSTS MORE BUT IT LASTS LONGER.

CLINTON WIRE CLOTH CO.,
CLINTON, MASS.

Ceilings

FIRE-PROOFING DEPARTMENT
ALBERT OLIVER
1 Madison Ave., New York

Seattle: L. A. Norris, 909 Alaska Building
St. Louis: Hunkins-Willis Lime & Cement Co.
Syracuse, N. Y.: Paragon Plaster Co.
San Francisco: L. A. Norris, 835 Monadnock Building

Partitions

SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1907, by Munn & Co.]


Vol. XCVII.—No. 23.
ESTABLISHED 1845.

NEW YORK, DECEMBER 7, 1907.


[10 CENTS A COPY
\$3.00 A YEAR.]




Rear Admiral Charles W. Rae, Chief of the Bureau of Steam Engineering.

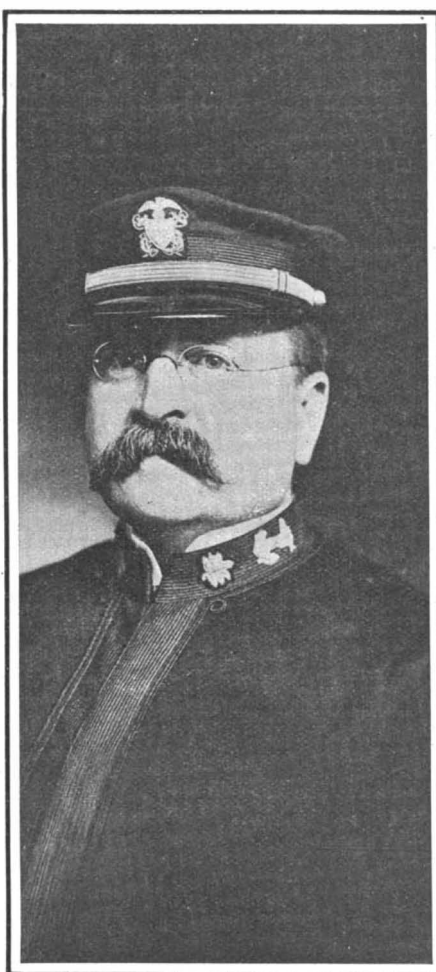

Rear Admiral Newton E. Mason, Chief of the Bureau of Ordnance.

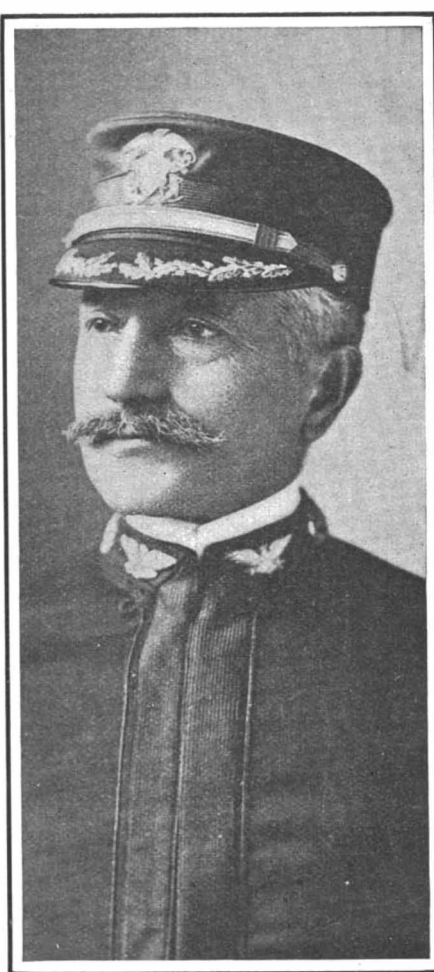

Rear Admiral W. H. Brownson, Chief of the Bureau of Navigation.

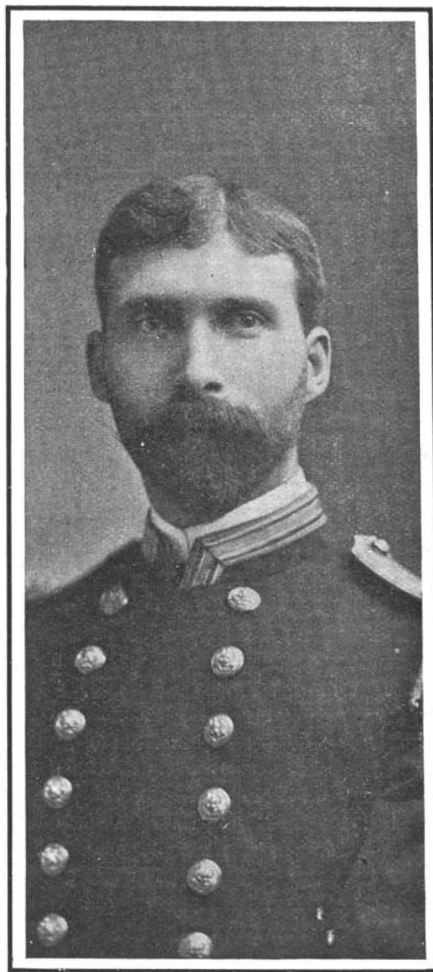


Rear Admiral W. L. Capps, Chief Constructor and Chief of the Bureau of Construction and Repair.



Copyright 1907 by Cineamist.

Admiral George Dewey.

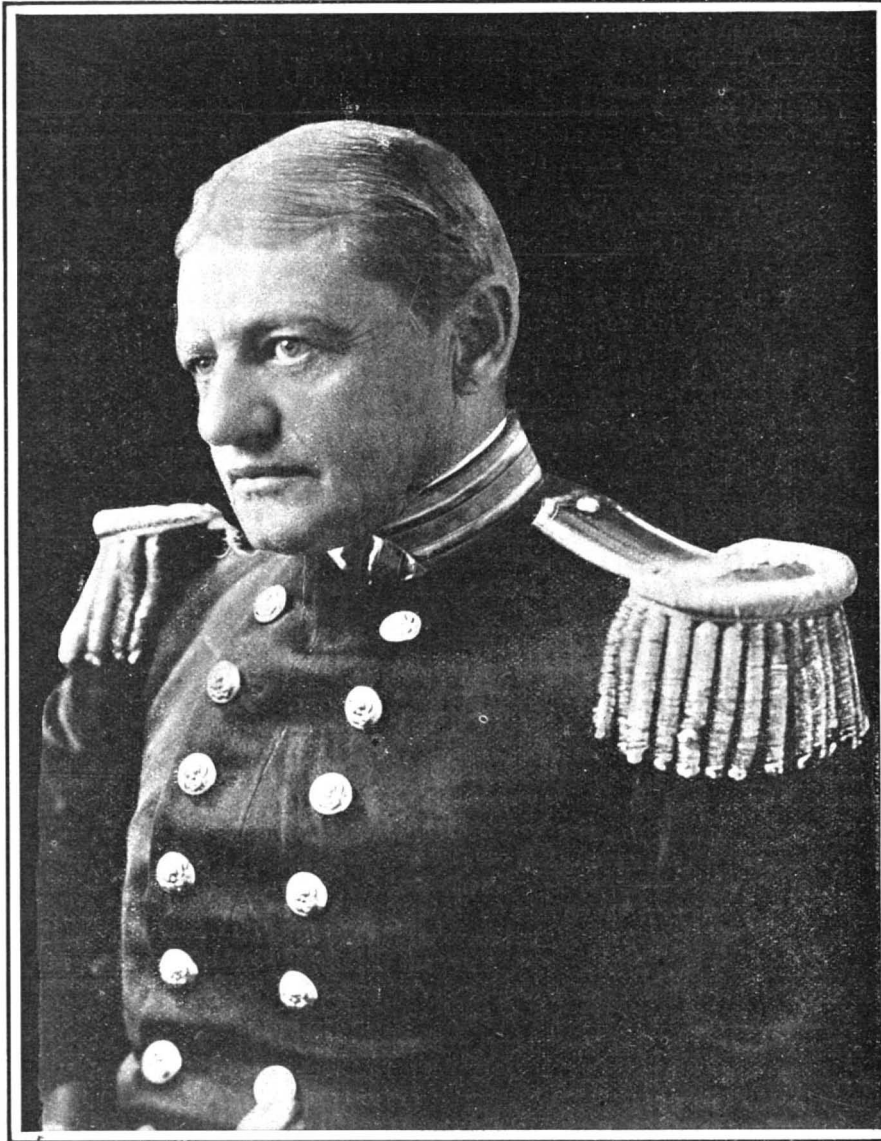

Copyright 1907 by Cineamist.

Rear Admiral Robley D. Evans.

THE MEN AT THE HEAD OF THE UNITED STATES NAVY.

SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO. - Editors and Proprietors

Published Weekly at

No. 361 Broadway, New York

CHARLES ALLEN MUNN, President

361 Broadway, New York

REDERICK CONVERSE BEACH, Sec'y and Treas.

361 Broadway, New York

TERMS TO SUBSCRIBERS

One copy, one year for the United States or Mexico..... \$3.00
 One copy, one year, for Canada..... 3.75
 One copy, one year, to any foreign country, postage prepaid, \$0.18s. 6d. 4.50

THE SCIENTIFIC AMERICAN PUBLICATIONS

Scientific American (Established 1845)..... \$3.00 a year
 Scientific American Supplement (Established 1876)..... 5.00
 American Homes and Gardens..... 3.00
 Scientific American Export Edition (Established 1878)..... 8.00
 The combined subscription rates and rates to foreign countries, including Canada, will be furnished upon application.
 Remit by postal or express money order, or by bank draft or check.

MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, DECEMBER 7, 1907.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are sharp, the articles short, and the facts authentic, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

WHAT CONSTITUTES NAVAL STRENGTH?

It is a difficult matter to find a basis of comparison of the strength of the world's navies which will give satisfactory results. There are so many elements that affect naval efficiency, and the military value of these elements differs so widely, that it is simply impossible to make a comparison based upon any one of them, which will give a reliable result. A mere statement of the total number of ships in each navy will not suffice, since these ships vary in size, speed, armor, and armament. It has been claimed that a comparison based on the total number and weight of guns carried would suffice; but the value of a gun depends greatly upon the character of the ship which carries it, the kind of mount upon which it is placed, the degree of armor protection, and so forth. Because of these modifying conditions, a 12-inch gun in one ship may expect to have two or three times the battle-life and efficiency of a 12-inch gun in some other ship. Nor will a comparison on the basis of armor protection suffice; for a fleet which is powerful only in its defensive qualities, and in which the area and thickness of its armor plating has been increased at the expense of the armament and the speed, would be wanting in that mobility and power to swiftly concentrate and deliver a telling blow at the critical moment, upon which the success of a naval campaign so greatly depends. So also, a comparison on a basis of speed would be misleading; for high speed is one of the most costly elements in a warship, costly in the large demands which it makes upon displacement, and it is a fact that, unless the size of the units be very large, unusually high speed in warships is always associated with limited gun power and inadequate protection. A fleet of exceedingly fast, but moderately-armed and moderately-protected ships, might sweep the seas of the smaller unprotected cruisers and the general seaborne commerce of an enemy; but it would be powerless to force the issue by a decisive line-of-battle engagement. Then, lastly, and perhaps most important of all, there is the question of age. We do not recall any product of human industry which, as the years go by, depreciates so rapidly in value as the warship; and the most elaborate estimate of the relative value of the fleets of the world is not worth the paper it is written on, unless the question of the age of the ships be most carefully considered. Warships built to-day have at least twice the value of those built ten years ago, and from four to six times the value of those built twenty years ago. Great Britain awoke to this fact and acted upon it in the most trenchant way, when she swept over one hundred warships off the list, and placed them under the auctioneer's hammer.

For some years past the SCIENTIFIC AMERICAN has claimed that the only true basis of comparison of naval strength is one based upon total displacement, modified by considerations of age. Unless there be glaring faults in the design, a ton of displacement in one ship is worth about as much as one ton in another ship of the same class and date. The profession of naval architect is one of the most expert in the world, and it is represented by an exceedingly able body of men. Let three leading architects—English, French, and American—compete in the design of a battleship of given displacement, and though the ships may differ in details, the total fighting value will be about the same for all three. It must be admitted, however, that the enormous value given to the heavy, long-range, armor-piercing gun by the results of the Japanese war, has called for a modification in the above method of comparison. If the present popular theories are correct, the navy which can place on the shortest battle line the largest number of 12-inch, or other heavy pieces of modern design, is certain to win the fight; and an estimate of the strength of the navies on this basis will greatly modify the results obtained on a basis

of displacement and age only. We give elsewhere the results of a comparison in which is included no gun that is not able to pierce heavy armor at 5,000 yards range, and which includes no piece in the respective guns below the 50-caliber 9.2-inch gun, the 45-caliber 10-inch, the 40-caliber modern 11-inch, the 35-caliber 12-inch, and the 35-caliber 13-inch and 13½-inch. This reservation excludes from the table all the battleships of the "Royal Sovereign" class of the British navy; the "Iowa," whose 12-inch gun has only about 2,000 foot-seconds velocity, in our navy; all the battleships of the "Wittelsbach" and "Kaiser Friedrich III." classes of the German navy, which carry an old model 9.4-inch gun, and those of the "Brandenburg" class, mounting an old model 11-inch. The result shows that England can place in the battle line 292 heavy armor-piercing guns; that France is second with 160 such guns; the United States third with 144 guns; and Japan and Germany are equal, each with 118 guns. This comparison takes in all the ships authorized, under construction, and already built. The large number of heavy guns carried in the Japanese navy in proportion to displacement shows how they are applying the lessons of their own war.

THE BATTLESHIP AND GUN OF THE FUTURE.

The running fight which followed the sortie of the Russian fleet at Port Arthur, and the decisive battle of Tsushima Straits, crystallized into fact many theories of the design and maneuvering of warships; and settled, probably for many years to come, the vexed questions of the size of ship, the type of gun, and the best formation in which to fight a naval action. The battleship of the future will be of great size; displacement will be not less than 20,000 tons; and this will increase so rapidly that a 30,000-ton ship will probably be afloat before the close of the next decade. The main armament will consist exclusively of heavy guns of not less than 12 inches caliber; and, unless the difficulty of erosion can be overcome, the 12-inch will give place to a 13-inch and, possibly, to a 14-inch piece. Future engagements will be fought at an extreme range, the extent of which will be limited only by the ability of the fire-control officer to see the fall of the shots. The determination of the range at which an engagement shall be fought will lie with the fleet which possesses the fastest speed.

It is to-day the almost unanimous opinion of naval officers that one big ship is more effective than two smaller ships of half her size. Future engagements will be fought with the two fleets steaming in parallel lines, in what is known as line ahead formation; that is, with each ship of a fleet steaming in the wake of the one ahead, with an interval of about 500 yards between them. If, of two such fleets, one were made up of four 20,000-ton battleships, each carrying eight 12-inch guns, the whole line would be about 2,100 yards in length; and if the other fleet consisted of eight 10,000-ton ships, each mounting four 12-inch guns, the line would be 5,600 yards in length, or over three miles. The fleet of larger ships would probably have sufficient advantage in speed for the admiral to maintain his four vessels abreast of the first four of the enemy's line; and, in this case, an eight-gun ship would be opposed to a four-gun ship, with the inevitable result (if the gunners were at all equally matched) that the four smaller ships would be silenced. The fleet of larger vessels would then slacken speed and drop back, taking the ships of the enemy in turn, and smothering them with a superior gun fire. At the opening of such an engagement the fifth and sixth in line of the four-gun ships would be able to direct a diagonal fire upon the last of the eight-gun ships, but the range would be so great that it could not prove to be very effectual. *Unquestionably, the victory in future engagements will lie with the fleet which is able to concentrate the largest number of heavy guns within the shortest line of battle.* Hence, the *raison d'être* of the big ship; and, hence the certainty that the navies of the world have been forced into a contest of size, the end of which no one can foretell.

The enormously destructive power of the big gun at close ranges; the unwillingness of an admiral to expose his costly ships to the swift destruction which a close-range engagement would involve; and his natural desire to utilize the skill of his gunners to the utmost by forcing the supposedly less skillful enemy to fight at the greater ranges, are responsible for the fact that in the Japanese war the range was about 5,000 yards, and in future wars will probably be 7,000 and over. But at long ranges it is only the larger guns that can do effective work against an armored ship; and it has come to be pretty generally conceded that for this purpose the 12-inch piece is the most satisfactory. It is true that the 50-caliber, 9.2-inch gun, and long-caliber pieces of 10-inch and 11-inch caliber, are also armor-piercers at this range; but it takes the 12-inch gun to get through belt, barbette, and turret armor, and the destructive effect of the heavier projectiles is enormously greater. Furthermore, the flatter trajectory, or curve of flight, of the larger gun means a much wider danger space; that is to say, the 12-inch piece can hit a ship with a much wider

margin of error in elevation than a 9.2-inch or 10-inch gun; and, although the smaller gun will deliver more projectiles, it is now generally conceded that the greater destructive effects and the greater certainty of hitting of the 12-inch overbalances the advantages of greater rapidity of fire of the lighter guns.

Now, although the above considerations will lead to the elimination from the main batteries of future battleships of mixed batteries of 6-inch, 7-inch, 8-inch, and 12-inch guns, such as are mounted on the "Georgia" and the "Connecticut," there is another and most important consideration which will lead to the mounting of only one caliber of gun on future ships, and that is the question of "fire control." The latest method of obtaining the range and of directing the fire is not dependent, as is popularly supposed, upon the range finder. Because of the narrow base line afforded by even the largest ships, it is impossible to estimate distances, at the great ranges which are now used, with any accuracy, by even the best form of range finder. The method now adopted is to have a "fire-control station" in some lofty position on the ship, and find the range by trial shots. The observing officer notes the splash of the shell and telephones the result to the gun, and the elevation is changed until a hit is made. Now, when three or four calibers of guns are firing indiscriminately, it becomes difficult to distinguish the splash of one caliber of shell from that of another. With one type of gun on the ship, there can be no error of this kind, and the fire can be directed with great accuracy.

As to the size of the future gun, there are indications that it will steadily increase. Already, Great Britain is, we understand, manufacturing a new and extremely powerful 13½-inch piece for her new twelve-gun ships. The advantage of size is not only that the bigger gun is more accurate, but that it holds its velocity longer, and its striking energy is therefore proportionately greater at the longer ranges. Increase in caliber, however, means a great increase in weight; and, were it not for erosion, our ordnance officers would prefer to obtain increased accuracy and striking energy by an increase of velocity. By using the wire-wound system and increasing the powder charge, it would be possible to produce a 12-inch gun which would be even more accurate than a 13½-inch of the ordinary model, and would strike a blow of equal energy. But the increased erosion in such a gun would render its life very short—a defect which might have disastrous consequences in a long-drawn-out naval campaign.

REMARKABLE TARGET PRACTICE BY THE FLAGSHIP OF THE PACIFIC FLEET.

If the results recently obtained in target practice by Admiral Evans's flagship, the "Connecticut," may be taken as representing the average skill of the gunners on the sixteen battleships of the Pacific fleet, the fighting value of the fleet is established beyond all question. Two targets, each measuring 30 feet high by 50 feet long, were used, the fire during the earlier part of the run being directed at the first target, and the later shots being aimed at the second target. The "Connecticut," steaming at 10 knots an hour, opened fire at four and a half miles. She continued firing for eight minutes; and, at the command to cease fire, she was five and a half miles from the second target. In that time she had put through the target four 12-inch, nine 8-inch, and seventeen 7-inch shells. Considering the great range and that the target was only one-eighth as long as a modern battleship, this was phenomenally good shooting.

THE MOTOR TORPEDO BOAT—A NEW TYPE.

The purchase by the British Admiralty of the motor-driven torpedo boat, built and successfully tested last winter by Messrs. Yarrow, must be regarded as an official indorsement of a new type of fighting craft. The vessel was built entirely on the responsibility of Messrs. Yarrow, and under the conviction that there would be a wide field of usefulness in store for it, as forming part of the naval defenses of estuaries and harbors. The original idea of the torpedo-boat flotillas was that they should consist of a large number of small and comparatively cheap units, each possessing high speed, and exposing only a small area to gun fire. In recent years, however, in the endeavor to secure higher speeds, there has been a steady departure from at least two of these essential principles. The boats have grown larger and more costly, until, from the original size of 75 feet, they have grown to an overall length of 150, with a proportionate increase in the cost. The builders of this craft believe that it will be possible, by making use of internal-combustion engines, to return to first principles in these two respects, without sacrificing too much of the present high speed.

The small size of these boats would enable them to form part of the boat equipment of battleships and cruisers. The earlier attempts to carry torpedo boats on warships failed, because the restrictions on size rendered it impossible to install steam engines of sufficient power.

THE TRUE SIGNIFICANCE OF THE PACIFIC CRUISE.

BY CAPT. A. T. MAHAN.

The projected movement of an American fleet of sixteen battleships, with attendant smaller vessels, from the Atlantic to the Pacific coast of the United States is an event not only important, both from the professional and national point of view, but striking to the imagination. It carries in itself certain elements of grandeur. It is therefore not surprising that it should have attracted particular notice from the press; but the effect upon the imagination of several journals has been such as to approach the border line of insanity. A measure designed upon its face to reach a practical solution of one of the most urgent naval problems that can confront a nation having two seaboard, extremely remote the one from the other, has been persistently represented as a menace to a friendly power—Japan; and so effectively has this campaign of misrepresentation been carried on, so successfully has an obvious and perfectly sufficient reason for this cruise been ignored in favor of one less probable, and, so far as knowledge went, non-existent, that certain of the press of Japan, we are told, have echoed the cry.

Not only so, but European journals, notably some in Great Britain, among them certain which are incessant in their warnings against Germany, and conscious that the whole distribution of the British fleet has of late been modified, with the object of increasing the battle-ship force quickly available for the North Sea, where their only enemy is Germany, nevertheless affect to deprecate the dispatch of a United States fleet from its Atlantic to its Pacific coast, where it will be four thousand miles from Japan, against the two or three hundred which separate England and Germany. A new British naval base has been established on the North Sea. The naval maneuvers of this autumn, in which have taken part twenty-six battleships and fifteen to twenty armored cruisers, that is, over forty armored vessels, with other cruisers and torpedo boats in numbers, have been in the North Sea; one coast of which only is British as our Pacific coast is ours. The Naval Annual for this year, a publication conservative in tone as well as high in authority, discusses the strategy of the North Sea with unhesitating reference to Germany. I take from it the statement that by May, 1908, 86 per cent of the British battleship strength will be concentrated in or near home waters. Yet in the face of all this, the rulers of Great Britain and Germany, at this very moment of my writing, find no difficulty in exchanging peaceful assurances, the sincerity of which we have no good reason to doubt. Have we also forgotten that upon the Emperor William's famous telegram to Kruger, a British special squadron was ordered into commission, ready for instant movement? Whether a retort or a menace, even so overt a measure, in home waters, gave rise to no further known diplomatic action. We Americans are attributing to other peoples a thinness of skin, suggestive of an over-sensitiveness in ourselves which it was hoped we had outgrown.

Let it be said at once, definitely and definitively, that there is in international law, or in international comity, absolutely no ground of offense to any state, should another state, neighbor or remote, see fit to move its navy about its own coasts in such manner as it pleases. Whatever Germany may think of the new distribution of the British navy, she says nothing, but will silently govern her own measures accordingly. The statesmen of Japan, who understand perfectly the proprieties of international relations, know this well, and doubtless retain their composure; but the result of the action of certain of the American press has been to stir up popular feeling in both countries, by the imputation to the United States government of motives and purposes which cannot be known, and which *prima facie* are less probable than the object officially avowed. Whether this endeavor to rouse ill blood has been intentional or not, is of course known only to the editors; but grave ground for suspecting even so unworthy a motive as to injure the national administration is fairly to be inferred from such a paragraph as I shall here quote, from a New York journal of October 6. My chief object in quoting, however, is not to impugn motives, however reasonable such construction, but to emphasize the essential characteristic of the coming movement of our fleet:

"Suppose that soon after the New Orleans riots, when relations between the United States and Italy were 'strained,' the American fleet had been sent on a practice cruise to the Mediterranean.

"Suppose that soon after the Venezuela message, Mr. Cleveland had ordered the whole American fighting naval strength to take a practice cruise off Nova Scotia or Jamaica."

Such action, in either supposed case, would have been wantonly insolent and aggressive, calculated to provoke hostilities, and such as no statesman would take, unless he had already determined to force war, or saw it looming large on the horizon; as the British fleet was sent to Besika Bay in 1878. The insolence, aggression, and provocation, however, would have been the demonstration off the coast of the nation with whom diplomatic difficulty existed. Occurring when these innuendoes did, in the midst of the virulent campaign of imputation of warlike purposes against the Admin-

istration, the inference is irresistible that there was deliberate intention to parallel the sending of our fleet from our one coast to our other to a measure as offensive as those named. The distinguishing characteristic of the movement now projected, from the international point of view, is that it is not in the nature of a demonstration, peaceful or hostile, off the coast of any other state, much less off that of one with whom our relations are asserted by the press to be delicate. Not every man in the street, however, could detect the fallacy. It is a maxim of law that intention can only be inferred from action. So wild an insinuation, in the columns of a journal distinguished for intelligence, can, so far as the action shows, be attributed only to a willingness to mislead, or to a loss of head.

In pursuing the next aspect of this cruise to which I purpose to devote attention, I am led again to quote the same journal. The slip lies before me, but I have failed to note the date:

"We are asked to believe that this expedition to the Pacific is a mere 'practice cruise.' He must be a miracle of innocent credulity who believes it. What observant men perceive in this dangerous situation is a cataclysm trained and bridled for Theodore Roosevelt to bestride and run amuck."

The last sentence is not necessary to my purpose; but I preserve it, partly for that gem of metaphor, "a cataclysm trained and bridled," and partly for the directness of the charge against the President of preparing conditions that must issue in war.

For the rest, if to believe in the obvious and adequate motive of practice for the fleet is to be a "miracle of innocent credulity," such I must admit myself to be; and I do so heartily. I am not in the councils of either the government or the Navy Department. I have neither talked with nor heard from any person who from official position could communicate to me any knowledge of the facts. My own information has been confined throughout to the newspapers. Shortly after the purpose to send the fleet became known, and counter agitation to be made, I had occasion to write to a British naval friend; and I said to him then that, while I had no clue to the motives of the Administration, it seemed to me that a perfectly sufficient reason was the experience to be gained by the fleet in making a long voyage, which otherwise might have to be made for the first time under the pressure of war, and the disadvantage of not having experienced at least once the huge administrative difficulties connected with so distant an expedition by a large body of vessels dependent upon their own resources. By "own resources" must be understood, not that which each vessel carries in herself, but self-dependence as distinguished from dependence on near navy yards—the great snare of peace times. The renewal of stores and coal on the voyage is a big problem, whether the supply vessels accompany the fleet or are directed to join from point to point. It is a problem of combination, and of subsistence; a distinctly military problem. To grapple with such a question is as really practical as is fleet tactics or target practice.

To this opinion I now adhere, after having viewed the matter in the light of such historical and professional thought and training as I can bring to it. Other reasons may have concurred; of this I know nothing. The one reason, practice, is sufficient. It is not only adequate, but imperative. The experiment—for such it is until it has become experience—should have been made sooner rather than be now postponed. That it was not sooner attempted has been, probably, because the growth of the navy has only now reached the numbers, sufficiently homogeneous, to make the movement exhaustively instructive.

The word *practice* covers legitimately many features of naval activity, which differ markedly and even radically from one another, though all conducive to the common end—proficiency. I may perhaps illustrate advantageously by a remark I have had occasion to make elsewhere, upon two theories concerning the summer practice cruises of the Naval Academy. There were—probably still are—those who advocated spending most of the allotted time in quiet, contracted, waters, following a prearranged routine of practical drills of various descriptions, which would thus be as little as possible disturbed by weather or similar impediment. Others favored the practice vessels putting out at once to sea for a voyage of length, amounting often to five or six thousand miles, in which must necessarily be experienced many kinds of weather and other incidents, reproducing the real life of the sea, and enforcing such practical action as the variable ocean continually exacts. It is evident that these conceptions, though opposite, are not contrary to each other, but complementary; and a moment's thought shows that under another phase they reappear in every fleet, if its active life is thoughtfully ordered with a view to full efficiency. It is imperative that a fleet, for a large proportion of the year, seek retired waters and relatively equable weather, for the purposes of drill with the guns; from the slow graduated instruction of the gunners, the deliberate firing at a stationary target, and from a ship either at rest or slowly moving, up through successive accretions of speed, of ship and of discharges, until the extreme test

is reached of fast steaming, and firing with the utmost quickness with which the guns can be handled. In like manner the maneuvering of a body of several ships in rapid movement, changing from one formation to another, for the ultimate purposes of battle, must progress gradually, in order that commanding officers and their under-studies may gain, not only ability, but confidence, based upon habit; upon knowledge of what their own ships can do, and what they may expect from the other vessels about them. Ships in battle order must keep at distances which, relatively to the speed maintained, are short; dangerously short, except where compensated by the sureness of handling based on long practice. It is clear also that alterations in the personnel of a fleet, which are of frequent occurrence, make constant tactical drills additionally necessary.

But when all this—and more not here specified—has been accomplished, whether at the Naval Academy or for the fleet, what has been done but lay the necessary foundation upon which to rear the superstructure of the real life of the profession? There remains still to fulfill the object—very different from mere practice, though dependent upon it—which alone justifies the existence of a navy. The pupil of the Naval Academy passes naturally and imperceptibly into the routine life of the service by the simple incident of being ordered to a sea-going ship; the single ship, the cruiser, gains her sufficient experience by the mere fact of staying at sea; but a fleet tied to its home ports, or to the drill ground, does not undergo, and therefore does not possess, the fullness of fleet life. Not only are the interruptions numerous and injurious; not only does the easily reached navy yard sap the habit of self-reliance; but out in the deep, dependent upon itself alone and for a long period, there await a fleet on a distant voyage problems so different in degree from those of a vessel alone as practically to be different in kind. Multiply any kind of difficulty by sixteen, and you have passed from one order of administration to another.

The movement of the United States battle fleet from the Atlantic to the Pacific coast is in the highest sense practical, because it is precisely the kind of movement which the fleet of any nation may, and usually will, be required to make in war. It is further practical, because the United States has a Pacific as well as an Atlantic coast, and has not a navy large enough to be divided safely between them. The question is at least debatable, whether for the near future the Pacific is not the greater center of world interest; as it certainly is, with regard to our own military necessities, one of greater exposure than the Atlantic. Like France, with her Mediterranean and Atlantic shores, the United States is in the painful military dilemma of being liable to attack upon one side while the fleet is on the other; but our distance to be covered is so much greater than that of France, that the position is vastly more embarrassing. A fleet of battleships leaving Toulon, full coaled and victualled, may reach Brest or Cherbourg without renewing the fuel and stores in its holds; but a fleet leaving New York or Norfolk for San Francisco has upon its hands a most serious administrative problem, and one which no accuracy of gun-fire, no skill in tactics, can meet. It is in fact the problem of Rodjestvensky, to use an illustration particularly apt, because recent. Can our navy in such case expect from the weak states of South America the facility for recoaling, etc., which was liberally extended to the Russian admiral, to the somewhat amazement of the naval profession, and to the just indignation of Japan?

It is an old saying that an army, like a snake, moves on its belly. This is little less true of a navy. In the foremost naval man of modern times, in Nelson, we, according to our several prepossessions, see the great strategist, or the great tactician, or the great fighting man; but the careful student of his letters realizes that, underlying all, is the great administrator, who never lost sight or forethought for the belly on which his fleet moved. The unremitting solicitude for the food essential to the health of his crews; the perpetual alertness to seize opportunity, indicated by such casual note, at sea: "Finished discharging store-ship No. —;" the slipping into Tetuan to fill with water, because little progress toward Gibraltar could be made against the current and temporary head wind; the strong self-control, holding down his constitutional impetuosity to move, till sure that all has been done to make movement far reaching, as well as accurate in direction; the whole culminating at the end of his life in a wide sweeping movement across the Atlantic, back to Gibraltar, and thence to Brest, a period of three months—about equivalent to that required for our projected transfer—during which he was never embarrassed about stores because always forehanded; that is the way—speed, not haste—in which wars are won. It was, and was recognized at the time to be, a magnificent instance of the mobility which is the great characteristic of navies as fighting bodies; not the mobility which consists in getting an extra half-knot

(Continued on page 412.)

BATTLESHIPS

TEN YEARS' DEVELOPMENT OF THE BATTLESHIP FROM THE "KEARSARGE" TO THE "DELAWARE."


At the close of the Spanish war the United States navy included but four first-class battleships; and

have to wait upon one another, and the rapidity of fire is, therefore, diminished. The ideal mounting for rapidity and general efficiency of fire is to carry each gun in a turret by itself. It can then be fired as often and whenever the officer in command desires, and without any reference to the fire of any other gun. Another element of danger is the open communications from the guns to the magazines, a fault for which, both in these and later ships, we were to

pay dearly. Also the central battery of fourteen 5-inch guns is exposed to destruction by a single large shell. The "Kentucky" is a small battleship as size goes nowadays, with a displacement of 11,540 tons, a trial speed of 16.9 knots, and a bunker capacity of 1,591 tons. At the waterline she is protected by a belt 16½ inches thick amidships, tapering to 4 inches at the bow; the belt is not continuous, but terminates in the wake of the after main barrette, the protection of the after portion of the ship being left to the protective deck, which here is from 3 to 5 inches in thickness, being elsewhere in the flat portions of it 2¾ inches in thickness. Above the belt the side of the ship for about two-thirds of its length amidships is protected by a wall of 5-inch armor which extends to the main deck. Above this is a casemate battery protected by a wall of 6-inch armor, within which is mounted a battery of fourteen 5-inch guns, seven on a side. Also the ship carries twenty 6-pounders, eight of them on the gun deck, and twelve of them on the superstructure deck. All of the guns are served by electric hoists, and the big guns are also handled electrically. These ships are powerfully armed for their size; but, judged by modern ideas, their freeboard is low, being only about 13 feet, and the secondary battery, according to the ideas of the days in which they were built, was too light. But, curious to relate, the reversal of ideas as to the armament of ships has been such that, in respect of her secondary battery, the "Kearsarge" is thoroughly up-to-date, carrying a main armament of heavy guns, and a secondary armament of 5-inch guns for repelling torpedo attack. An improved type of this gun is to be mounted on our latest 20,000-ton ships of the "Delaware" class.

THE FIRST-CLASS BATTLESHIP "ALABAMA"—CLASS OF THREE SHIPS.

The next addition of battleships to our navy consisted of the three vessels of the "Alabama" class, namely, the "Alabama," "Wisconsin," and "Illinois." These vessels were built respectively at the Cramps'

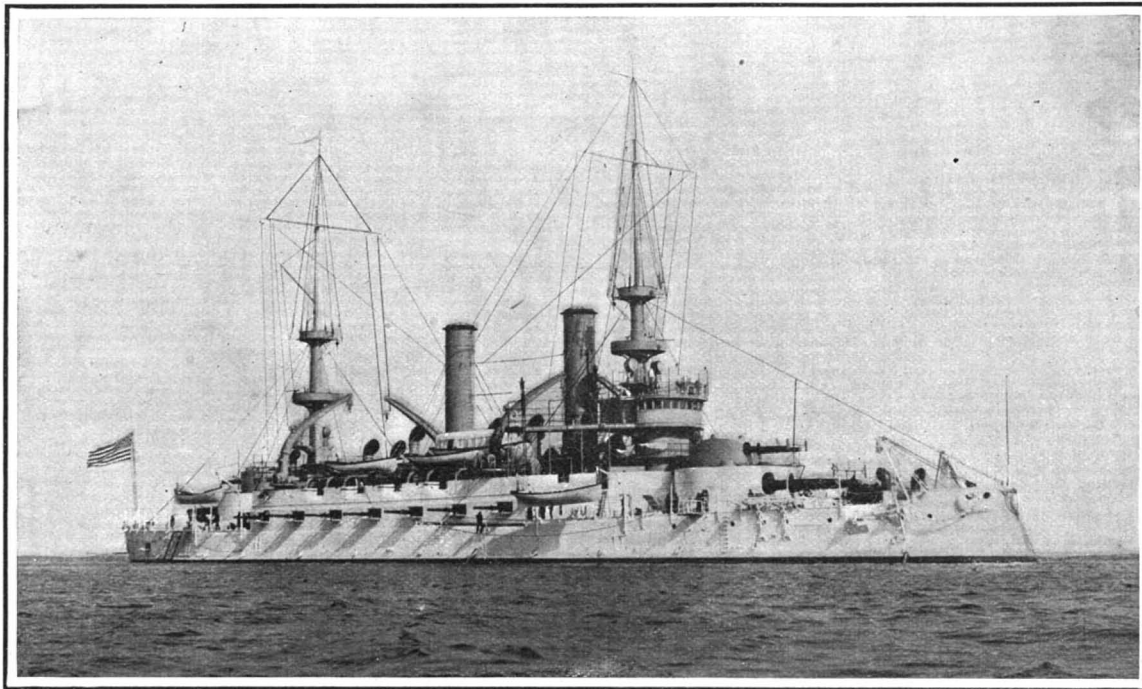

Copyright 1905 by Loeffler.


Displacement, 11,540 tons. **Speed,** 16.9 knots. **Bunker Capacity,** 1,591 tons. **Armor:** Belt, 16½ inches to 4 inches; turrets, 15 inches to 17 inches; barbettes, 15 inches; deck: flat, 2¾ inches, slopes, 3 inches to 5 inches. **Batteries:** Four 13-inch B. L.; four 8-inch B. L.; fourteen 5-inch R. F.; twenty 6-pounders; eight 1-pounders; four Colts; two 3-inch field guns. **Torpedo Tubes,** 4. **Complement,** 589.

FIRST-CLASS BATTLESHIP "KENTUCKY." SISTER SHIP "KEARSARGE."

these have been so far outbuilt that to-day they are relegated to the class of coast defense vessels. These were the "Oregon," "Indiana," "Massachusetts," and "Idaho." The first battleships to go into commission after the close of the war were the "Kearsarge" and "Kentucky," built at Newport News. They marked a radical departure from their predecessors.

THE BATTLESHIPS "KEARSARGE" AND "KENTUCKY."


The distinguishing feature of the "Kentucky" was the method adopted of carrying the 13-inch and 8-inch guns of the main battery. With a view to obtaining as wide an arc of fire as possible, these guns were mounted in superposed or double-deck turrets, as to the merits of which there arose a very wide diversity of opinion among naval men. The 13-inch guns are mounted in the lower turret, upon the roof of which is carried a smaller turret for the 8-inch guns. The two turrets being constructed integrally, one turning mechanism serves for both pairs of guns; but each pair is, of course, provided with its own elevating gear. The obvious advantage of this mounting is that the 8-inch are never masked by the 13-inch guns, or by the superstructure, as is the case in the "Oregon," and all four of them are, therefore, available not only for end-on fire, but for fire on either broadside. The disadvantages are that a single successful hit by the enemy would probably put all the four guns of the turret out of commission at once. Another and perhaps more serious drawback is that four of the heaviest guns

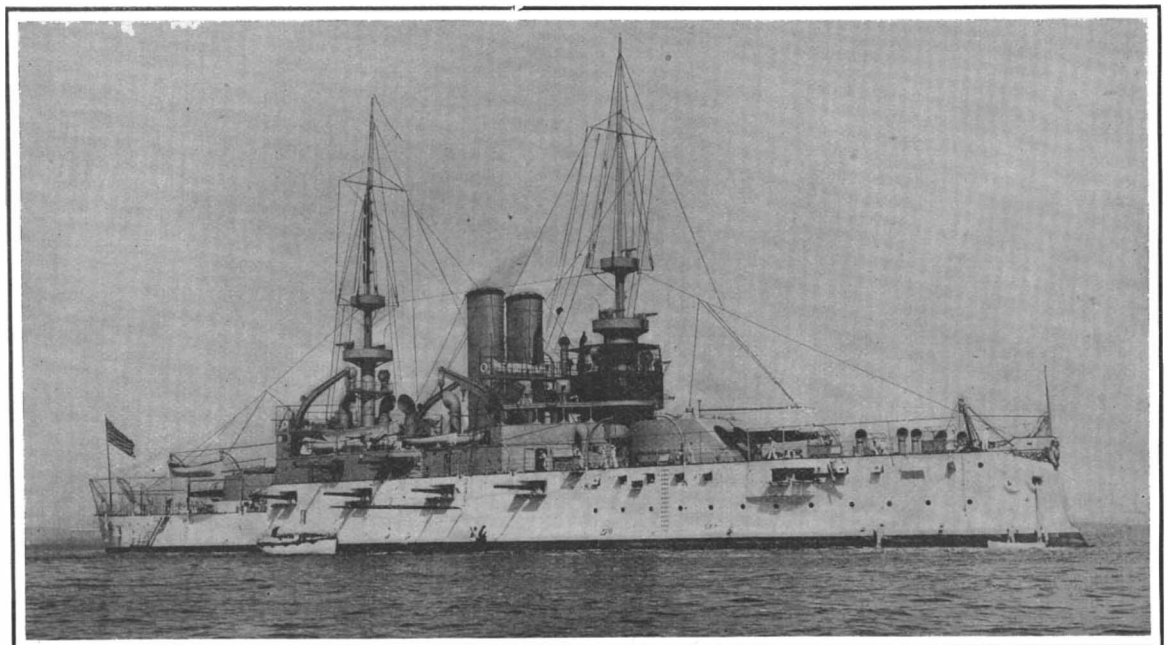

Copyright 1904 by Loeffler.

Displacement, 11,552 tons. **Speed,** 17.2 knots. **Bunker Capacity,** 1,310 tons. **Armor:** Belt, 16½ inches to 4 inches; turrets, 14 inches; barbettes, 15 inches; deck: flat, 2¾ inches, slopes, 3 inches to 4 inches. **Batteries:** Four 13-inch B. L.; fourteen 6-inch R. F.; sixteen 6-pounders; six 1-pounders; four Colts; two 3-inch field guns. **Torpedo Tubes,** 4. **Complement,** 590.

FIRST-CLASS BATTLESHIP "ALABAMA." ALSO "WISCONSIN" AND "ILLINOIS."

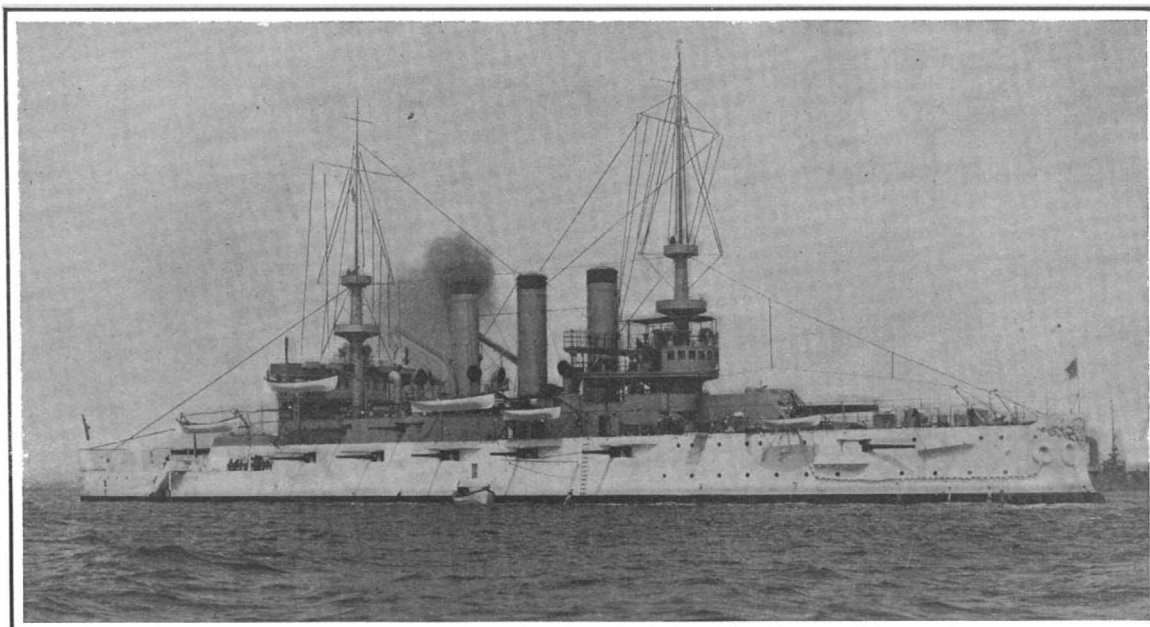

Copyright 1907 by Loeffler.

Displacement, 12,500 tons. **Speed,** 18 knots. **Bunker Capacity,** 2,000 tons. **Armor (Krupp):** Belt, 11 inches to 4 inches; turrets, 12 inches to 11 inches; barbettes, 12 inches; deck: flat, 2¾ inches, slopes, 3 inches to 4 inches. **Armament:** Four 12-inch 40-caliber, sixteen 6-inch 50-caliber R. F.; six 3-inch R. F.; eight 6-pounders; six 1-pounders; two Colts; two 3-inch field guns. **Torpedo Tubes,** 2 submerged. **Complement,** 551.

FIRST-CLASS BATTLESHIP "OHIO." ALSO "MAINE" AND "MISSOURI."

shipyard, at the Union Iron Works, San Francisco, and at Newport News. In one respect they hark back to the "Iowa," for, like her, they have a good freeboard, being provided with a forecastle deck with a height of about 20 feet above the water-line, this freeboard being continued to the aftermost main turret, where it is reduced by the height of one deck to a freeboard of about 13 feet. The displacement is about the same as that of the "Kearsarge" class, and with 11,207 horse-power they developed on trial about 17 knots. The armor plan is similar to that of the "Kearsarge," consisting of a waterline belt extending from the after main turret to the bow, 16½ inches thick amidships, 4 inches at the bow. Above this is a wall of armor, extending to the upper deck amidships, which is 5½ inches in thickness, and on the main deck this armor is pierced to carry eight 6-inch guns in casemates. Two 6-inch guns are mounted in casemates in the bow, and on the upper deck in casemates are carried four other 6-inch guns, two on each broadside. The main battery consists of four 13-inch guns, carried in turrets of 14-inch armor, above barbettes of 15-inch armor.

In the armament of these ships the government made a rather surprising departure from the previous battleships of our navy, by discarding the 8-inch gun altogether. In the six battleships which preceded them the 8-inch gun was, perhaps, the most striking characteristic of the armament, serving to distinguish our battleships from those of other navies, in which

the usual plan was to carry four main 12-inch or 13-inch guns, and a secondary battery of 6-inch guns. But the United States battleships, in addition to the main and secondary batteries, mounted a powerful intermediate battery of 8-inch pieces. The disappearance of the 8-inch gun was greatly regretted by a majority of the officers of our navy, and its reappearance, later, in the "Georgia" class was hailed with profound satisfaction. The "Alabama" class, also, are readily distinguished from other battleships of the navy, by the fact that the boilers are placed fore and aft, and the two elliptical smokestacks are placed side by side, an arrangement which had been followed in the battleships of the "Royal Sovereign" class of the British navy.

FIRST-CLASS BATTLESHIP "MAINE"—CLASS OF THREE SHIPS.

On May 4, 1898, Congress authorized the construction of three battleships, the plans of which very closely followed those of the "Alabama" class, the idea being to have a homogeneous squadron of six identical vessels. When it was learned, however, that the contract speed of these ships was to be only 16 knots, which was about two knots slower than the speed of many foreign battleships, which were under construction at that date, there was a strong agitation in favor of the modification of these ships, which led to a revision of the plans to the extent of lengthening them by 20 feet, in order to provide the necessary space for an increase in the motive power. The "Alabama" class are 368 feet between perpendiculars, and the "Maine" class 388 feet, the other dimensions of the hull being identical throughout. The additional 20 feet of length raised the displacement from 11,552 tons in the "Alabama" to 12,500 tons in the "Maine"; and enabled the horse-power to be increased from about 11,000 to 15,603, with the result that on trial the "Maine" accomplished 18 knots. The "Maine" was built at Cramps, the "Missouri" at Newport News, and the "Ohio" at San Francisco. The additional length made it possible to mount an extra pair of 6-inch guns in the central battery, and the 35-caliber 13-inch gun of 2,100 foot-seconds velocity, gave place to the new 40-caliber 12-inch piece of 2,700 foot-seconds velocity. This resulted in a saving of 40 tons in the weight of the four guns, and a gain in penetration of from 12.5 inches at 3,000 yards for the 13-inch to 16.3 inches at the same distance for the 12-inch piece. An additional smokestack was added, and a return was made to the practice of placing the stacks on the longitudinal center line of the vessel. The previous battleships had all been protected with Harveyized armor; but in the "Maine" class, for the first time, the Krupp armor was employed, and it has been used in all subsequent battleships. Because of its higher resisting qualities, it was possible to reduce the thickness of the armor all round, the belt being 11 inches and the turrets 12 inches in thickness as against 16½ inches and 14 inches respectively in the "Alabama" class. The 6-inch guns also are of the latest 50-caliber pattern; and, taken altogether, these three vessels are to be considered the most heavily armed battleships of their particular type and date to be found in any navy. The bow 12-inch guns are carried at a height of 26½ feet above the water, the after 12-inch at a height of 19 feet. All four 12-inch can be loaded in any posi-

tion, and both the hoisting of the ammunition and the maneuvering of the guns are done electrically.


FIRST-CLASS BATTLESHIP "GEORGIA"—CLASS OF FIVE SHIPS.

The Congress of 1899 authorized the construction of three, and the Congress of 1900 of two first-class battleships, which to-day constitute what is known as the "Georgia" class. These ships are the "Georgia," "Nebraska," "New Jersey," "Virginia," and "Rhode Island." The contract for the "New Jersey" and "Rhode Island" went to the Fore River Shipbuilding Company; for the "Georgia," to the Bath Iron Works; for the "Virginia," to the Newport News Company; and for the "Nebraska," to the Moran Brothers, at Seattle. These ships represent a great advance in size, speed, and power over the "Maine" class. The main battery consists of four 12-inch guns, and the secondary battery of twelve 6-inch pieces; but the 8-inch gun makes its reappearance once more,

6-inch guns of the secondary battery are only 12 feet above the waterline. The great defect of these ships is the lack of protection to the magazines below the big gun turrets. There are no handsomer battleships in our navy than these of the "Georgia" class. All of them made their contract speed of 19 knots, and, in several cases, this speed was considerably exceeded. They have a bunker capacity of 1,700 tons of coal, and, compared with other ships of their displacement and date, they carry an exceptionally heavy battery. When in the end-on position they can concentrate ahead or astern two 12-inch, six 8-inch, and two 6-inch. On either broadside they can train four 12-inch, six 8-inch, and six 6-inch guns. The guns of the superposed turrets, both 8-inch and 12-inch, can be trained through an arc of 270 degrees. The 8-inch guns on the beam have an arc of training of 180 degrees, and the guns of the 6-inch battery have an arc of training of 110 degrees. In these ships was mounted, for the first time, the new powerful turbine-driven 21-inch torpedo, for the firing of which each ship carries four submerged torpedo tubes.

FIRST-CLASS BATTLESHIP "CONNECTICUT"—CLASS OF SIX SHIPS


Following the "Georgia" class came the authorization in 1902 of the "Connecticut" and "Louisiana," and in the following two years of the "Kansas," "Minnesota," "Vermont," and "New Hampshire." In the same year also were authorized two battleships, the "Idaho" and "Mississippi," of less size, power, and speed, of which we shall speak later. The first six vessels form, like the ships of the "Georgia" class, a homogeneous squadron. The "Connecticut," built at the Brooklyn navy yard, and the "Louisiana," built at Newport News, are practically identical. The "Kansas" and "New Hampshire," built by the New York Shipbuilding Company; the "Minnesota," built at Newport News; and the "Vermont," built by the Fore River Shipbuilding Company, differ slightly in armor and other details from the two earlier ships. In the "Connecticut," as compared with the "Georgia," the length was increased by 15 feet, the beam by 7½ inches, and the draft by 9 inches, the displacement being raised from 14,948 tons to 16,000 tons. The armor plan remained practically the same, except that the protection to the lower deck and casemates was increased to 7 inches. The battery, however, is greatly increased in power, the latest pattern of 45-caliber 12-inch gun being mounted in these ships for the first time in our navy. In addition to four of these carried axially in barrette turrets forward and aft, there are eight 45-caliber 8-inch guns in turrets on the broad-

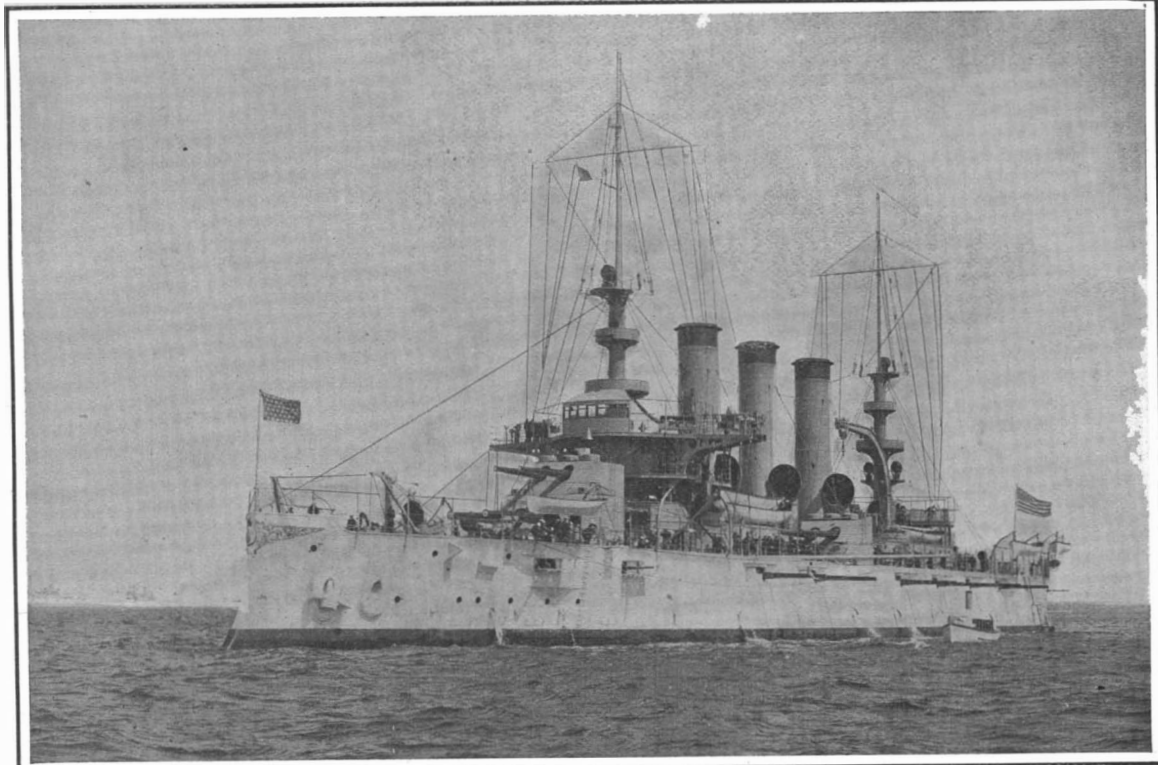

Copyright 1906 by Loeffler.

Displacement, 14,948 tons. **Speed,** 19 knots. **Bunker Capacity,** 1,700 tons. **Armor:** Belt, 11 inches to 4 inches; turrets, 11 to 10 inches and 6½ to 6 inches; barbettes, 10 inches and 6 inches; deck, flat, 1¼ inch, slope, 3 inches. **Armament:** Four 12-inch 40-caliber B. L.; eight 8-inch 45-caliber B. L.; twelve 6-inch 50-caliber R. F.; twelve 3-inch R. F.; twelve 3-pounders; eight 1-pounders; two 3-inch field guns; six automatic guns; two machine guns. **Torpedo Tubes,** 4 submerged. **Complement,** 705.

FIRST-CLASS BATTLESHIP "VIRGINIA."

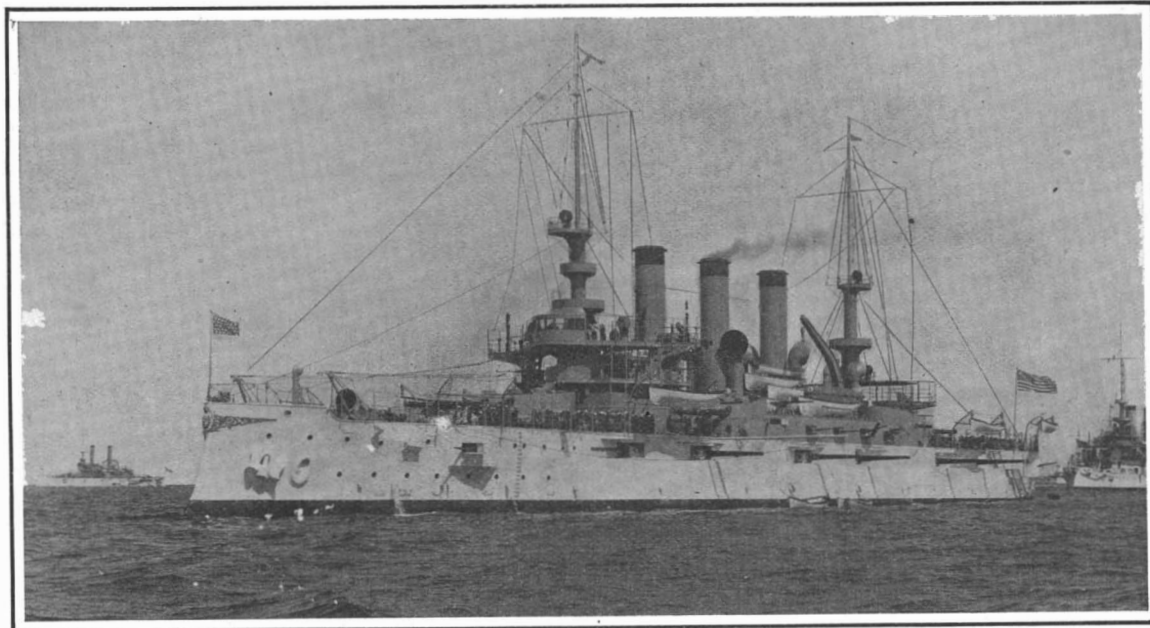

Copyright 1906 by Loeffler.


Displacement, 16,000 tons. **Speed,** 18 knots. **Coal Supply,** 2,200 tons. **Armor:** Belt, 11 inches to 4 inches; casemates, 7 inches; main turrets, 12 inches; secondary turrets, 8 inches; deck, 3 inches. **Armament:** Four 12-inch, eight 8-inch, twelve 7-inch, twelve 3-inch rapid-fire guns, 26 smaller guns. **Torpedo Tubes,** 4 submerged. **Complement,** 803.

BATTLESHIP "LOUISIANA." ALSO "CONNECTICUT."

eight of these pieces being carried. The length is increased to 450 feet, and the beam to 76 feet 10 inches. The displacement is increased from 12,500 in the "Maine" to nearly 15,000 in the "Georgia," and the speed is 19 knots. The armor plan is generally similar to that of the "Maine," except that the belt is carried continuously from bow to stern. In order to secure a maximum concentration of fire the double turret was reintroduced, four of the 8-inch guns being carried on the roof of the 12-inch turret, the other four 8-inch being mounted in two turrets, one on either beam. The command of the large guns is exceptionally good, the 12-inch being 26½ feet above the water, and the center line 8-inch 32 feet above the water; the side 8-inch, 26 feet above the water; but the

side, and an exceedingly powerful secondary battery mounted in casemates on the gun deck, consisting of twelve 7-inch 50-caliber rapid-fire guns. The 7-inch gun is a new gun, and it was mounted for the first time in the "Connecticut" and "Louisiana." It is a 50-caliber piece, capable of penetrating 6.4 inches of Krupp armor at 3,000 yards. The fire in any direction from these ships is heavy, consisting of two 12's, four 8's, and two 7's ahead and astern, and four 12's, four 8's, and six 7's on the broadside. They are provided with four submerged torpedo tubes for the new turbine torpedo, and they have the large coal supply of 2,200 tons. Both the "Connecticut" and "Louisiana" exceeded their high contract speed of 18 knots with

(Continued on page 429.)

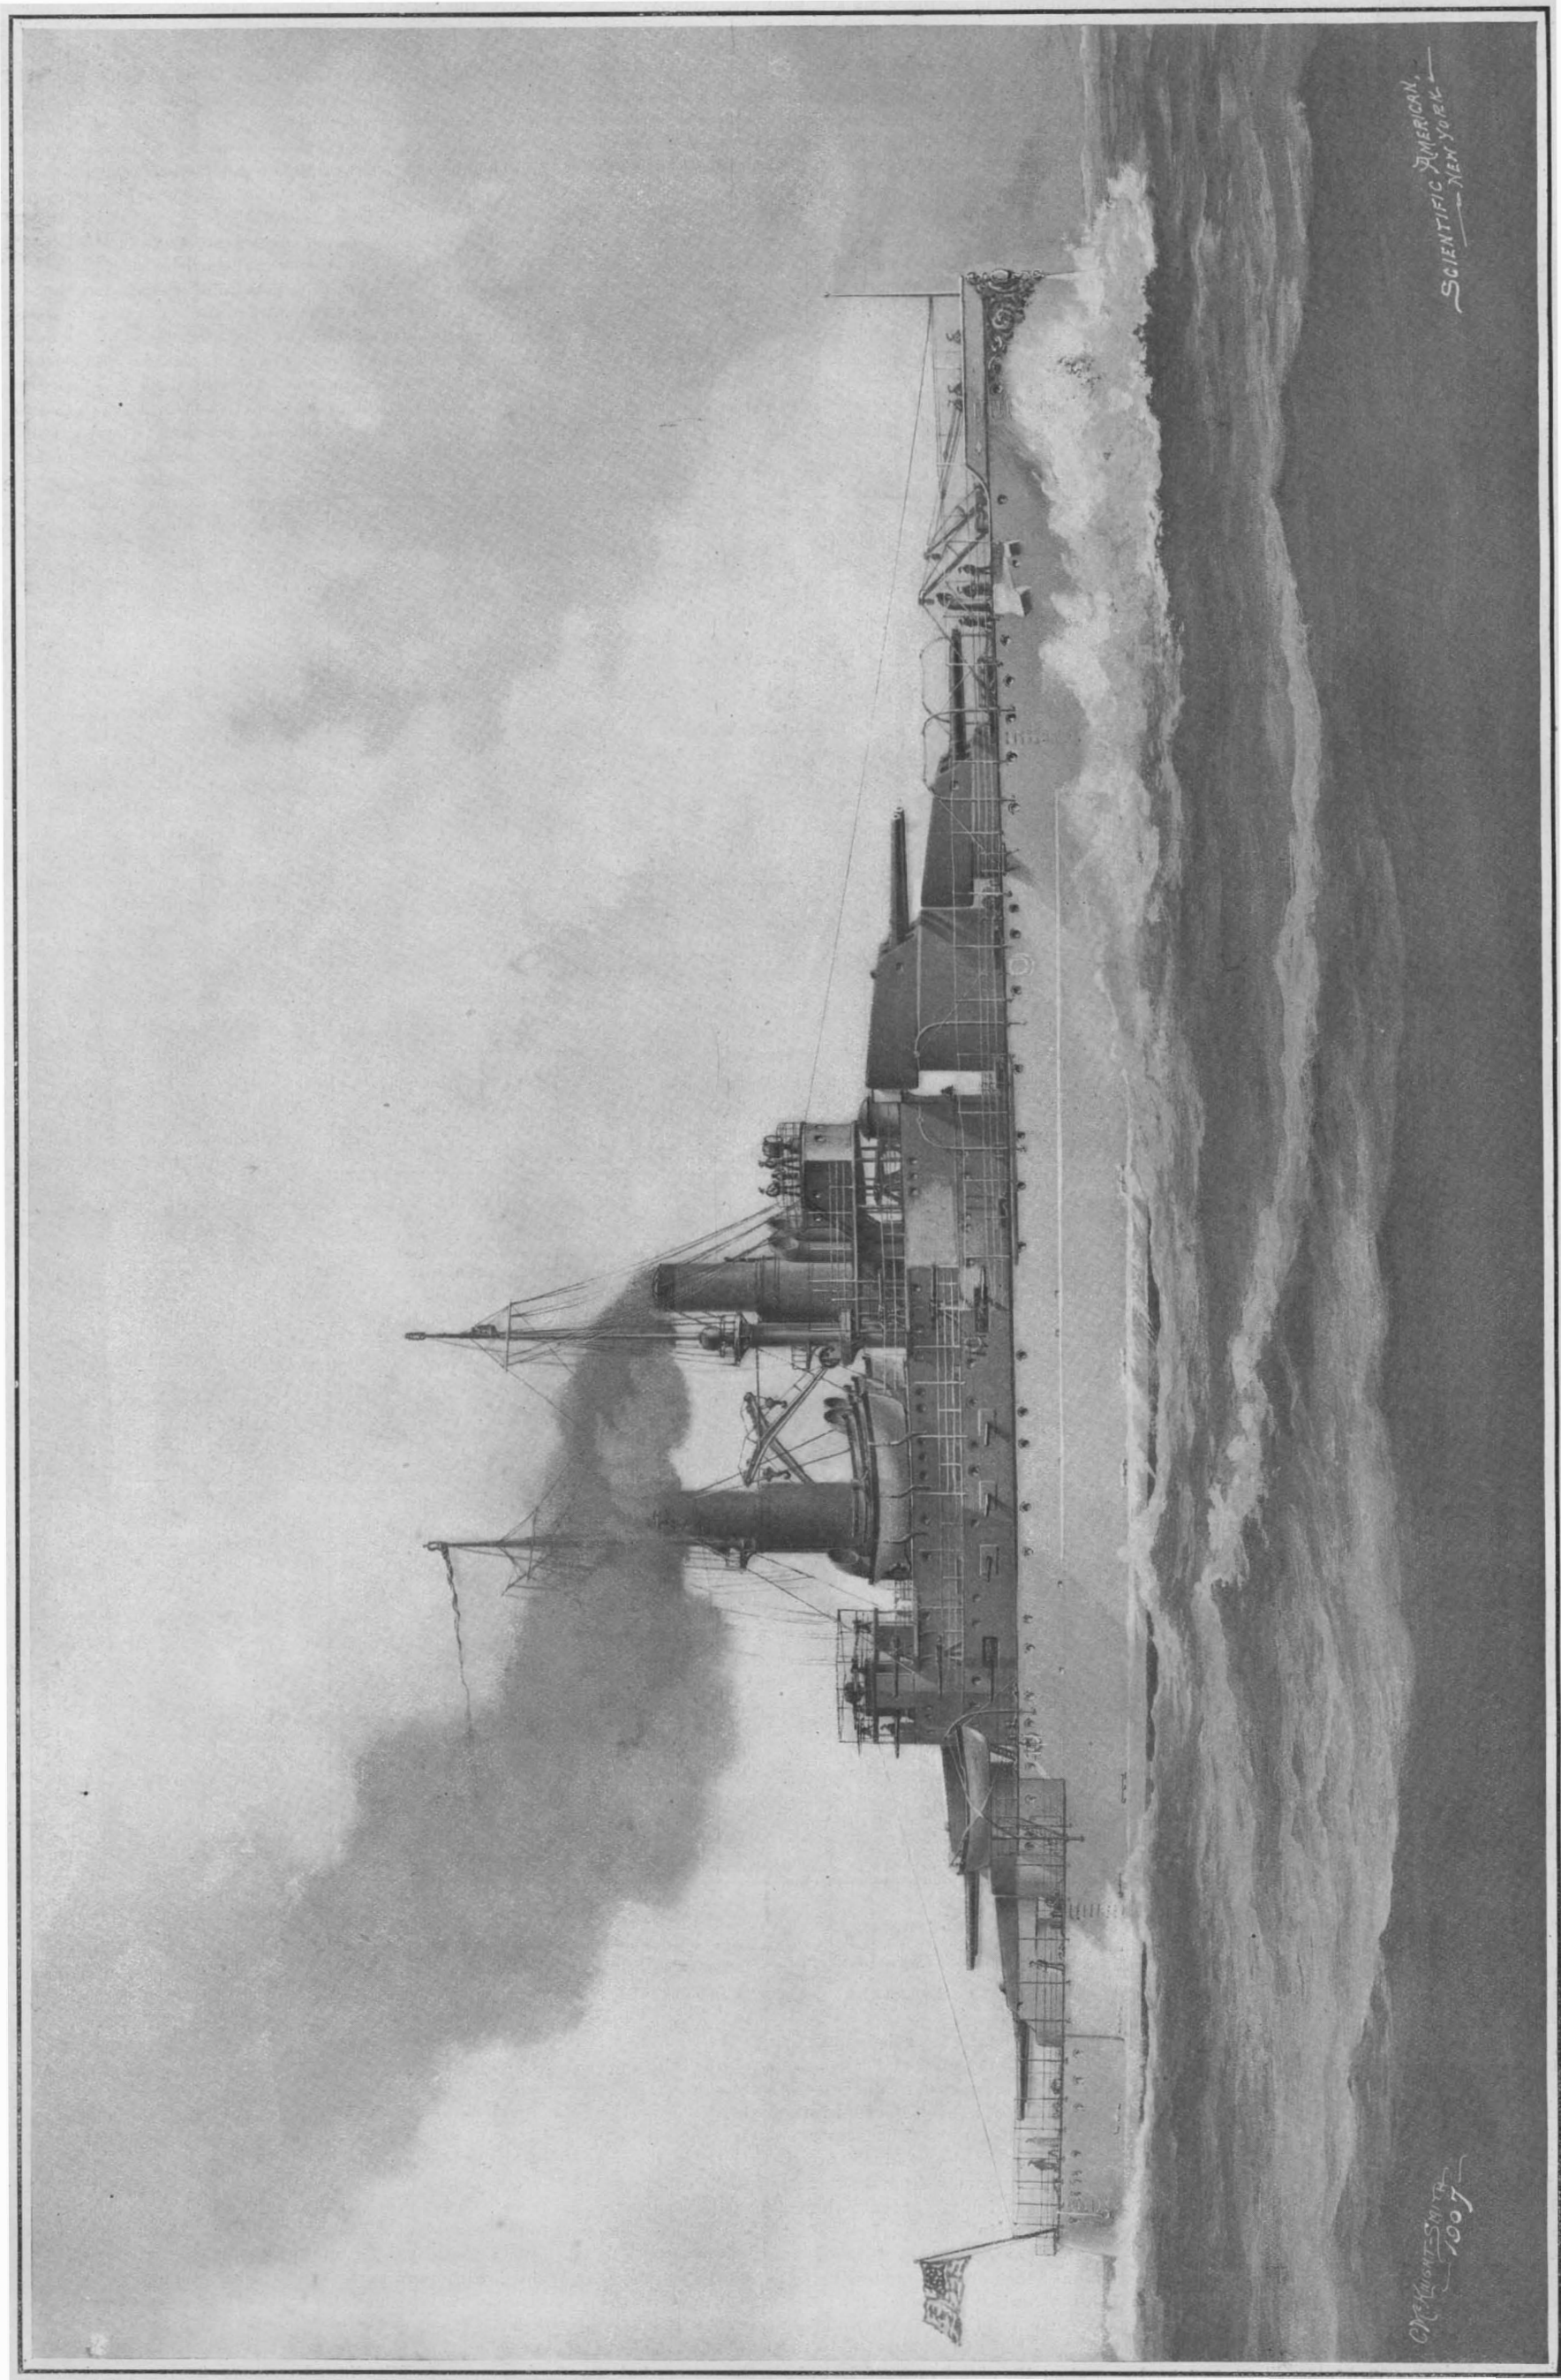

Displacement, 16,000 tons. **Speed,** 18.5 knots. **Coal Supply,** 2,200 tons. **Armor:** Belt, 12 inches ; casemate side armor, 10 to 8 inches ; barbettes and turrets, 10 to 12 inches. **Armament:** Eight 45-caliber 12-inch guns ; twenty-two 3-inch guns. **Torpedo Tubes,** 2 submerged. 21-inch.

FIRST-CLASS BATTLESHIP "SOUTH CAROLINA." ALSO "MICHIGAN."

CRUISERS

ARMORED CRUISERS OF THE "CALIFORNIA" AND "WASHINGTON" CLASSES—TEN SHIPS.

During the Spanish war, the armored cruiser gave such clear demonstration of its value, that it was not long before Congress had authorized the construction


knots with 22,000 horse-power, but this was in every case exceeded, the "Pennsylvania" making about 22½ knots, and the other vessels from 0.13 to 0.24 knot in excess of the contract speed. The ships carry a maximum supply of 2,000 tons of coal, and each is fitted with two 18-inch submerged torpedo tubes. Subsequently, four cruisers were authorized, which are nearly 1,000 tons larger than the "California" class, and embody improvements in the armament and armor plan. These

are the "Washington," built by the New York Shipbuilding Company; the "Tennessee," built at Cramps; and the "Montana" and "North Carolina," now building at Newport News. The improvements consist of lengthening the belt until it extends well beyond the barbettes of the main guns; substituting four 10-inch 40-caliber guns, in place of the four 8-inch 45-caliber guns, and adding a pair of 6-inch guns to the secondary battery, making sixteen in all.

Although the ships of this class are the equal of those armored cruisers of foreign navies designed at the same date, they are entirely outclassed by the later armored cruisers of other navies, such as the Japanese "Tsukuba," with its four 12's, twelve 6's, and twelve 4.7's, and the British "Invincible" class, carrying eight 12's and sixteen 4-inch guns.

PROTECTED CRUISER "CHARLESTON"—CLASS OF THREE SHIPS.

We have recently added to the navy three protected cruisers which, in view of developments since the Japanese war, are of doubtful value. These are the "Charleston," built at Newport News; the "Milwaukee," built at San Francisco; and the "St. Louis," built by Neafie & Levy, of Philadelphia. In view of the size of these ships, 9,700 tons, it is unfortunate that they should be so poorly protected. Their armor plans show a protective deck only 2 to 3 inches in thickness, and a partial belt of 4-inch armor, with 4-inch armor for the protection of the central battery. The ships carry each fourteen 6-inch 50-caliber guns, one mounted forward, one aft behind shields, and the other twelve being carried on the gun and main decks within the central battery. The vessels have made speeds of slightly over 22 knots on trial, which is half a knot above the contract requirement. Fifteen hundred tons of coal can be stored in the bunkers. The fighting value of these ships is small; though they are no worse than the contemporary British ships of the "County" class, several of which have visited our eastern harbors in recent years. In a modern engagement, these vessels would be quite unable to engage the up-to-date cruisers of some foreign navies, and against ships of their own type they would be

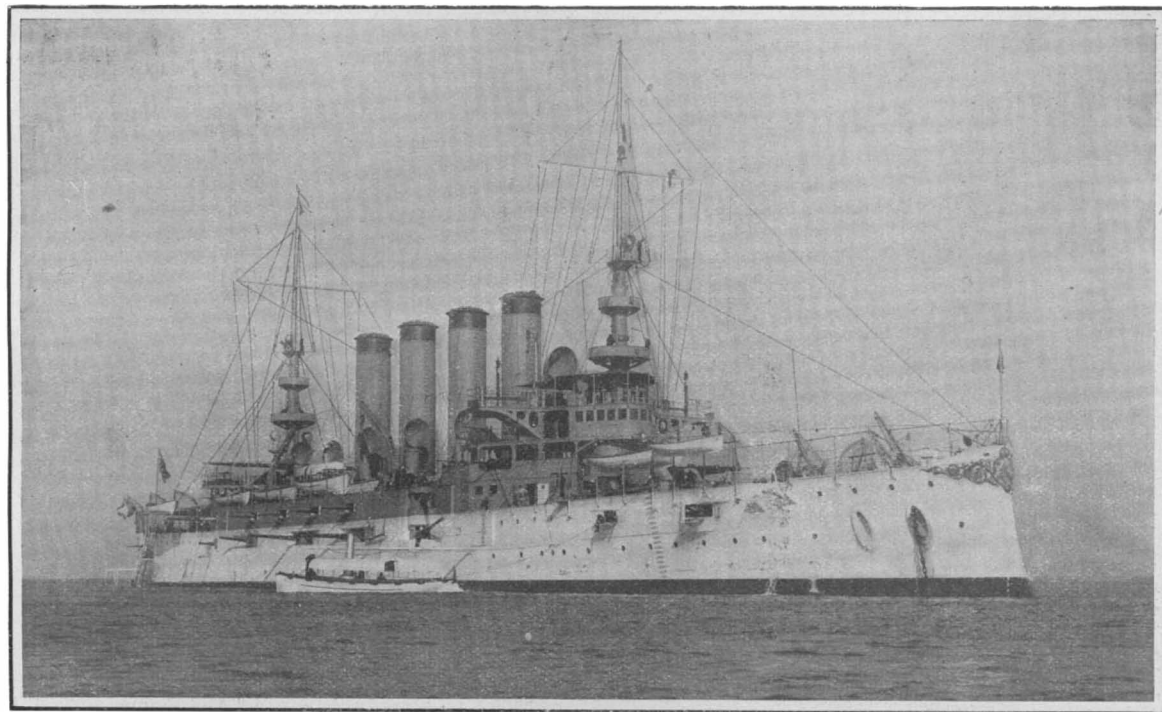


Copyright 1906 by Loeffler.

Displacement, 13,680 tons. **Speed,** 22 knots. **Bunker Capacity,** 2,000 tons. **Armor:** Belt, 6 inches to 3½ inches; turrets, 6½ inches to 6 inches; barbettes, 6 inches; deck, 1½ inch to 4 inches. **Armament:** Four 8-inch 45-caliber B. L.; fourteen 6-inch 50-caliber R. F.; eighteen 3-inch R. F.; twelve 3-pounders; eight 1-pounders; two 3-inch field guns; two machine guns; six automatic guns. **Torpedo Tubes,** 2. **Complement,** 822.

ARMORED CRUISER "PENNSYLVANIA," ALSO "CALIFORNIA," "SOUTH DAKOTA," "COLORADO," "MARYLAND," AND "WEST VIRGINIA."


of a powerful class of five of these ships, to embody the latest ideas for this type. The class includes the "California" and "South Dakota," built at San Francisco; the "Colorado" and "Pennsylvania," built by Cramps; and the "Maryland" and "West Virginia," built by the Newport News Shipbuilding Company. These ships are 502 feet long, 69 feet 6½ inches beam, and 24 feet 1 inch draft, on which draft they displace 13,680 tons. In outward appearance they are exceedingly handsome ships, with two masts and four funnels. Their freeboard varies from 20 feet at the bow and stern to about 19 feet amidships. The protection consists of a continuous belt from 6 to 3½ inches in thickness, associated with a deck having a thickness of 4 inches on the slopes, and 1½ inches on the flat. Above the main belt, the side of the ship amidships, for about one-third of the ship's length, is protected by 5 inches of armor with 4 inches transverse bulkheads. The main battery of four 8-inch guns is carried in two turrets forward and aft, and the fourteen 6-inch guns are mounted in a central broadside battery and in casemates, ten of the guns on the gun deck and four on the main deck. There is also a battery of eighteen 14-pounders mounted on the gun deck and in the superstructure. The ships were designed to make 22

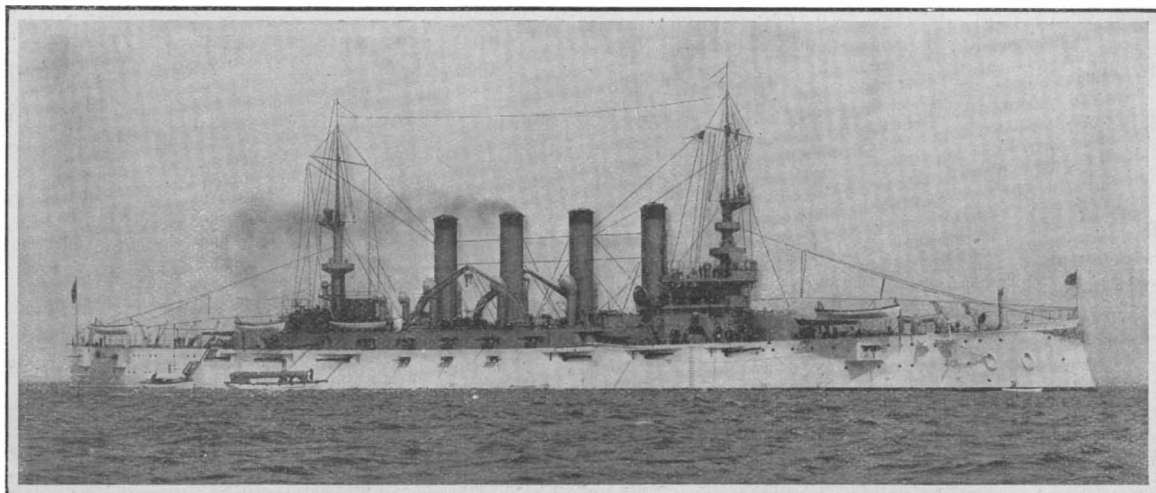

Copyright 1907 by Loeffler.

Displacement, 14,500 tons. **Speed,** 22 knots. **Bunker Capacity,** 1,950 tons. **Armor:** Belt, 5 inches; turrets, 9 inches to 5 inches; barbettes, 7 inches to 4 inches; deck, 4 inches to 1½ inch. **Armament:** Four 10-inch 40-caliber guns; sixteen 6-inch 50-caliber guns; twenty-two 3-inch guns; twelve 3-pounders; fourteen small guns. **Torpedo Tubes,** four 21-inch.

ARMORED CRUISER "TENNESSEE," ALSO "WASHINGTON," "MONTANA," AND "NORTH CAROLINA."

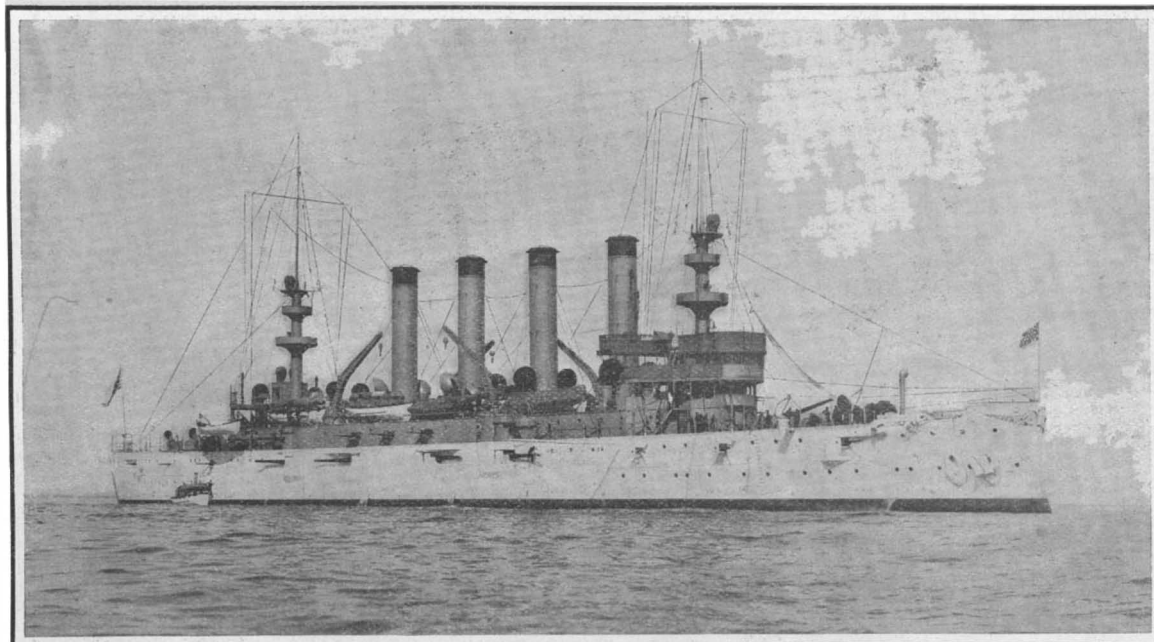

Copyright 1906 by Loeffler.

Displacement, 9,500 tons. **Speed,** 22 knots. **Bunker Capacity,** 1,500 tons. **Armor:** Belt, 4 inches; topsides, 4 inches; deck, flat, 2 inches; slopes, 3 inches. **Armament:** Fourteen 6-inch R. F.; eighteen 3-inch R. F.; twelve 3-pounder semi-automatics; four 1-pounder automatics; two 3-inch field guns; two .30-caliber machine guns; eight .30-caliber automatics. **Complement,** 564.

SEMI-ARMORED CRUISER "CHARLESTON," ALSO "MILWAUKEE" AND "ST. LOUIS."

terribly cut up by shell fire of the rapid-fire batteries. They will be useful for scouting purposes; but could engage only ships as poorly protected as themselves.

UNARMORED CRUISER "CHATTANOOGA" AND CLASS.

The Congress of 1899 authorized the construction of six small unarmored cruisers, which are known as the "Chattanooga," "Cleveland," "Denver," "Des Moines," "Galveston," and "Tacoma." These vessels were designed to serve as "station ships"; that is to say, their duty, in times of peace, is mainly to cruise on foreign stations, and in time of war perform various naval duties which would not call for vessels of either great speed or serious fighting power. To this end they were designed with roomy quarters for the officers and men, and particular attention was paid to the various requirements of long cruises in foreign waters, where the opportunities for docking and refitting are limited. To enable them to keep the sea for lengthy periods, they are sheathed with wood and copper. They are just under 300 feet in length, 44 feet in beam, and have a draft of 15 feet 9 inches for a displacement of 3,200 tons. The protection consists of a deck 5/16 of an inch on the flat and 2½ inches on the slope. The "Des Moines," of which we present an illustration, built by the Fore River Company, made 16.6 knots on her trials. She carries a maximum supply of 700 tons of coal, which is sufficient for 7,000 miles of cruising at 10 knots speed. Each ship mounts ten 5-inch 50-caliber guns, and twelve smaller guns. The former

are mounted, two on the main deck, one forward and one aft protected by shields, and eight on the gun deck in broadside. The complement is 293 officers and men.

THE SCOUT CRUISER "SALEM" AND CLASS.

There are now under construction for our navy three vessels of an entirely new class, which are expected to prove a very serviceable type. These are the scout cruisers "Birmingham" and "Salem," building at Fore River, and the "Chester," building at the Bath Iron Works. As they are not designed to do any fighting, except in an emergency, the effort of the designers has been to make them fast and thoroughly seaworthy. To this end they are provided with a lofty forecastle deck; and although they are but of 3,750 tons displacement, they are being fitted with engines of 16,000 horse-power, with which they must develop a speed of 24 knots. With a view to obtaining data as to the relative efficiency of the three types of engine, the "Birmingham" is being fitted with twin-screw reciprocating engines, the "Chester" with four-screw Parsons turbines, and the "Salem" with twin-screw turbines of the Curtis type. The armament consists of twelve 3-inch rapid-fire guns and two 21-inch submerged torpedo tubes. One excellent feature of these boats is the large coal supply, of 1,250 tons, which is expected to give them a radius of action larger than that of contemporary scouts of other navies.

THE TRUE SIGNIFICANCE OF THE PACIFIC CRUISE.

(Continued from page 407.)

on a speed trial with picked coal and firemen, but that which loses no time because it never misses opportunity. At the end, when he came off Brest, out of the dozen ships with him, all but two were turned over to the admiral there commanding, ready for any call; to blockade or to fight. Of the two, one, worn out structurally, he had retained from the first chiefly because of her value as a fighting unit, due to an exceptional captain; the other, his own flagship, had been over two years from a home port, yet within a month of arrival sailed again for his last battle. Compared to these its antecedents, Trafalgar is relatively a small matter.

The example is for all time. Incidental conditions have changed since then, but the essential problem remains. Steamers may not find in a calm, or in an unprofitable head wind, the propitious moment for clearing a storehouse, or running into a near port to

fill with water; but the commander-in-chief may find imposed upon him the consideration: Where should we fill with coal, and to what extent beyond the bunker capacity, in order to make the successive coalings, and the necessary stretches from point to point, most easy and most rapid? What distribution of these operations will make the total voyage shortest and surest? What anchorages may be available outside neutral limits, should neutral states consider coal renewal and other


Then the mere operation of transferring the coal, or other stores, under any of these circumstances is done more rapidly the second time than the first; and the third than the second. At what points of the voyage should additional colliers join, having reference, not only to the considerations above mentioned, but also to the ports whence they sail, that the utmost of their cargo may go into the fleet and the least be expended for their own steaming? It is

always well to consider the worst difficulties that may be met. From the north tropic on the one side to the same latitude on the other, the whole voyage of an American fleet will be in foreign waters, except when on the ocean common. Upon what hospitality can it count in war?

I hold it to be impossible that a fleet under a competent commander-in-chief and competent captains—not to mention the admirable junior official staff of our navy, of highly trained officers in the prime of life—can make the proposed voyage once, even with the advantages of peace, without being better fitted to repeat the operation in war. No amount of careful pre-arrangement in an office takes the place of doing the thing itself. It is surely a safe generalization, that no complicated scheme of action, no invention was ever yet started without giving rise to difficulties which anxious care had failed to foresee. If challenged to point out the most useful lesson the fleet may gain, it may be not unsafe to say: its surprises, the unexpected. If we can trust press reports, surprise has already begun in the home ports. The fleet apparently has not been able to get ready as soon as contemplated. If so, it will be no small gain to the government to know the several hitches; each small, but cumulative.

In my estimation, therefore, the matter stands thus: In the opinion of Sir Charles Dilke—than whom I know no sounder authority, because while non-professional he has been for a generation a most accurate observer and appreciative student of military and naval matters


—the United States navy now stands second in power only to that of Great Britain; but it is not strong enough to be divided between the Atlantic and Pacific coasts. Both are part of a common country; both therefore equally entitled to defense. It follows inevitably that the fleet should be always ready, not only in formulated plan, but by acquired experience, to proceed with the utmost rapidity—according to the definition of mobility before suggested—from one coast to the other, as needed. That facility obtained, both

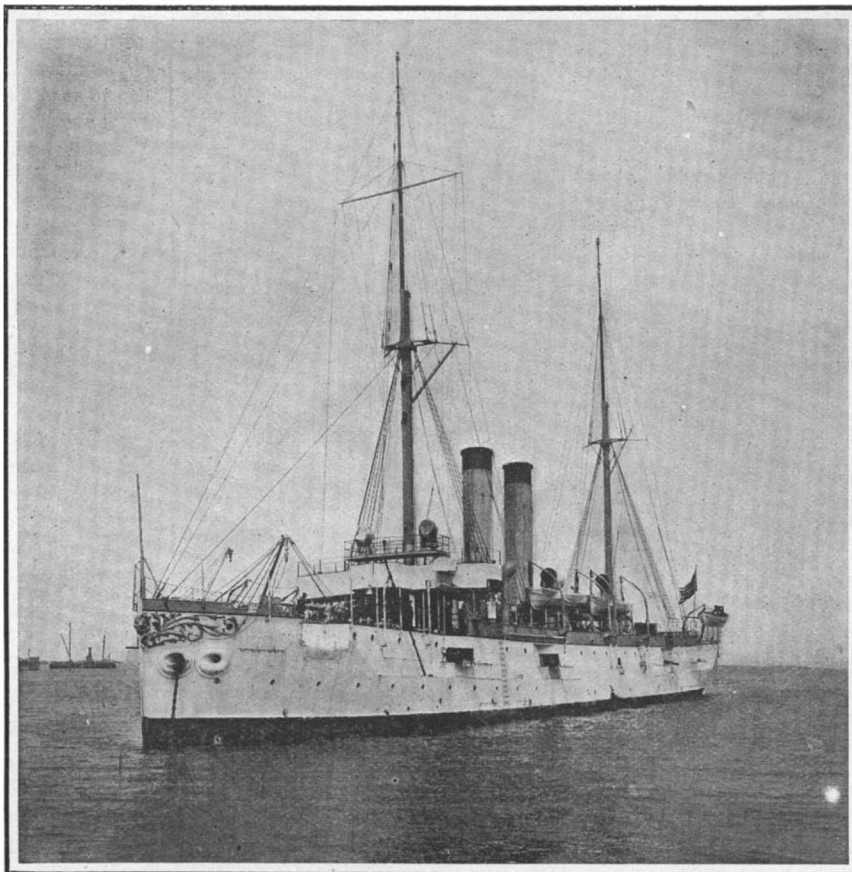

Displacement, 3,200 tons. Speed, 16½ knots. Bunker Capacity, 700 tons. Armor: Deck, ½ inch on flat, 1 inch to 2 inches on slopes. **Armament:** Ten 5-inch R. F.; eight 6-pounders; two 1-pounders; four Colts; one 3-inch field gun. **Complement, 293.**

SEMI-PROTECTED CRUISER "DES MOINES," ALSO "CLEVELAND," "CHATTANOOGA," "DENVER," "GALVESTON," AND "TACOMA."

refreshment an operation of war not to be permitted within their jurisdiction? What choice is there among these anchorages, for facility due to weather? If driven to coal at sea, where will conditions be most propitious? For concrete instances: How much of the wide and shoal estuary of the La Plata is within neutral jurisdiction? Is the well-known quietness of the Pacific between Valparaiso and the equator such that colliers can lie alongside while the ships hold their course? If so, at what speed can they move?

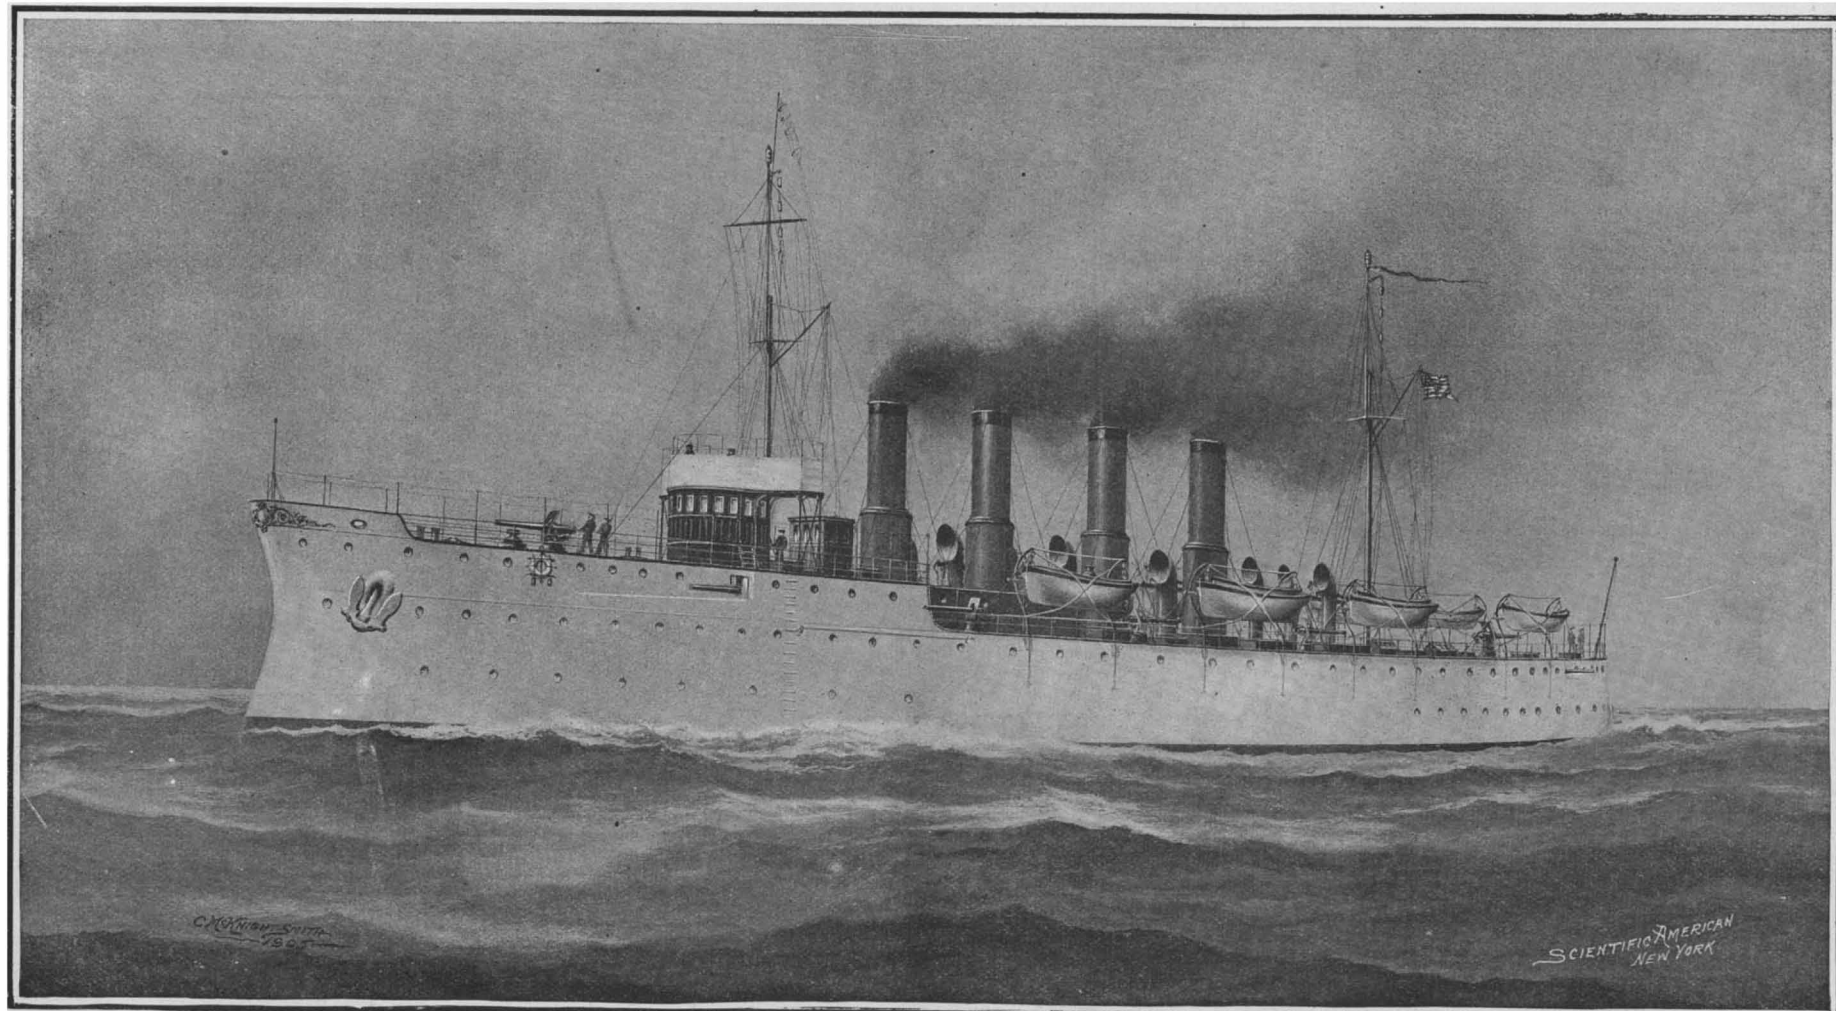

Length, 420 feet. Beam, 46 feet 8 inches. Trial Draft, 16 feet 10 inches. Depth Amidship, 36 feet 6 inches. Displacement on Trial, 3,750 tons. Battery, twelve 3-inch guns. Torpedo Tubes, two submerged. Armor: Deck, 1½ inch, side, 2 inches. **Horse Power, 16,000. Speed, 24 knots. Coal Supply, 1,250 tons.**

SCOUT CRUISER "SALEM," CLASS OF THREE SHIPS.


coasts are defended in a military sense. By this I do not mean that an enemy may not do some flying injury—serious injury—but that no large operation against the coasts of the United States can prosper, unless the enemy command the sea; and that he cannot do, to any effect, if within three months a superior United States force can appear. Rodjestvensky took longer; but could he have smashed Togo, as Togo did him, what would have been the situation of Japan, for all the successes of the preceding fourteen months? Evidently, however, the shorter the transit from the Pacific to the Atlantic, the greater will be the power of the fleet for good; just as it would have been better if Rodjestvensky—assuming his success—had come before Port Arthur fell, or better still before its fleet was destroyed. Such mobility can be acquired only by a familiarity with the ground, and with the methods to be followed, such as Nelson by personal experience had of the Mediterranean and of the West Indies; of the facilities they offered, and the obstacles they presented. Such knowledge is experimental, gained only by practice. It is demonstrable, therefore, that the proposed voyage is in the highest degree practical; not only advisable, but imperative. Nor should it be a single spasm of action, but a recurrent procedure; for admirals and captains go and come, and their individual experience with them. Why not annual? The Pacific is as good a drill ground as the Atlantic.

Paper from Peat.

In the report of United States Consul R. S. S. Bergh, of Gothenburg, Sweden, it is announced that paper making from peat has been begun in Sweden on a commercial scale. A company capitalized at over a million has acquired possession of extensive peat bogs, and has prepared plans for mills to turn out wrapping paper and pasteboard. Although the money for the enterprise was largely put up in London, the process by which the vegetable fiber of the peat is to be turned into paper is covered by an American patent. It is claimed that the cost of a ton of paper worth \$30 is but \$15, leaving a more than satisfactory margin of profit. Further claim is made that but two hours are required to convert peat into paper. This process,

HARBOR-DEFENSE MONITORS.

The great scare which took place along our seaboard cities when it was known that the Spanish fleet had started for America was no doubt largely responsible for the authorization by Congress in 1898 of four harbor defense monitors, one of which, the "Arkansas," built at Newport News, is herewith illustrated. The others, the "Florida," "Nevada," and "Wyoming,"

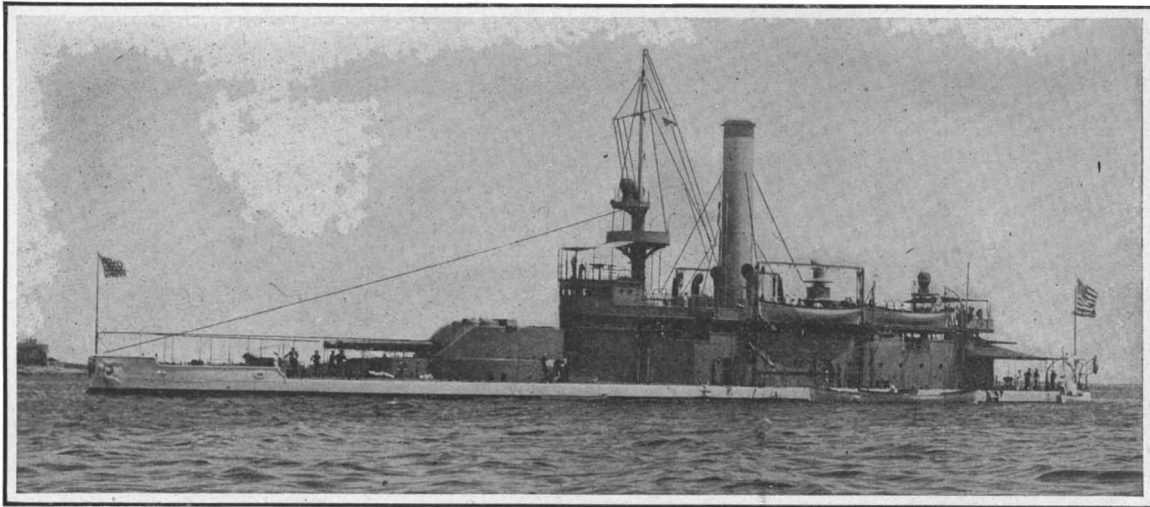

Copyright 1907 by Loeffler.

Displacement, 3,235 tons. **Speed,** 12 knots. **Bunker Capacity,** 400 tons. **Armor:** Belt, 11 inches; turrets, 11 inches; barbettes, 11 inches; deck, 1½ inch. **Armament:** Two 12-inch 40-caliber B. L.; four 4-inch R. F.; three 6-pounders; six 1-pounders; two Colts. **Complement,** 137.

HARBOR-DEFENSE MONITOR "ARKANSAS." ALSO "FLORIDA," "WYOMING," AND "NEVADA."

were built at Elizabethport, Bath, Me., and San Francisco. The "Arkansas" is 252 feet long, 50 feet beam, and draws only 12 feet 6 inches of water. She is a typical monitor, with a freeboard of only a few feet and her main battery of two 12-inch guns is carried at a height of not more than 8 or 10 feet above the water. The belt, 11 inches in maximum thickness, is 5 feet wide, half of this being below the water line. The deck is 1½ inches thick and the barbette and turret are protected by 11 inches of armor, all treated


remaining three reserves are in the waters of the State of Washington and include islands, some being at the entrance to Puget Sound, while the others are on the southwestern coast of the State near the Oregon line.

In forest preserves 480,451 acres have been added to the Stanislaus and Lassen Peak national forests in California, the addition to the Stanislaus forest lying

in Calaveras, Tuolumne, and Mariposa counties. The strip of land is 55 miles long and covers 348,570 acres. The northern part of this addition takes in the famous Calaveras grove of big trees, which is owned privately. The other smaller adjacent groves have given to the government the intention of buying the patented land.

TORPEDO-BOAT DESTROYERS.

At the time of the Spanish war the United States possessed no torpedo-boat destroyers; but the Congress

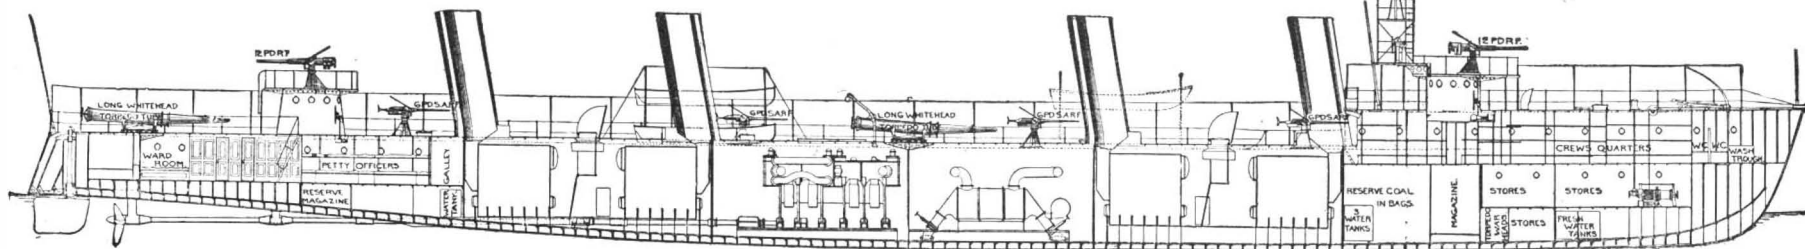

LONGITUDINAL SECTION, SHOWING INTERNAL ARRANGEMENTS OF TORPEDO-BOAT DESTROYERS.

however, will not do away with the use of wood pulp entirely, since only the rougher kinds of wrapping paper and cardboard can be economically made. Coarse papers and cardboards made from peat possess greater strength than similar articles in which straw is the basis. The supply of peat in the world is practically inexhaustible. It is found in all the countries of northern Europe, where it has been used for centuries as a fuel. It is not unusual to discover deposits many miles in extent and from ten to fifty feet deep. Siberia alone possesses thousands of square miles of this material, and much is known to exist in the United States and Canada. If it helps to produce the coarser grades of paper and thus relieves the pressure upon the tim-

ber supply, it will do a great deal toward aiding in the preservation of the forests of the United States.


by the Krupp process. In each corner of the superstructure is mounted a 4-inch, 50-caliber gun. The vessels have a speed of 12 knots in smooth water. They are purely harbor defense vessels, and in any but a comparatively smooth sea it would be difficult to make accurate shooting with the big guns. Steaming head to sea the decks are constantly submerged, and it would be a problem under such conditions to keep the water out of the turrets. It is certain that no more ships of the monitor type will be constructed for the United States navy.

New Forest Reserves Created.

President Roosevelt has recently created four new

of 1898 authorized on May 4 the construction of sixteen of these vessels. The contracts were signed in the following autumn, and it was not until some four years later that these boats went into commission. The accompanying photograph of the "Macdonough" shows the characteristic features of these craft. They vary in displacement from 408 to 482 tons, on a mean draft of from 6 feet to 7 feet 2 inches; but the full load displacement is considerably greater, varying from 512 to 692 tons. The "Macdonough" is 240 feet 7 inches long, 22 feet 3 inches extreme beam; her mean draft is 6 feet 8 inches; her normal displacement 430 tons, and her full load displacement 512 tons. She is driven by twin-screw triple-expansion engines. Steam is supplied by Thornycroft boilers. Her highest speed on trial was 28 knots on a mean displacement of 400 tons, and this was obtained with an indicated horse-power of 6,425. Her bunker capacity is 110 tons. The lowest speed obtained on trial by any of these boats was 28.1 knots and the highest 29.69 knots, which was the speed of the "Stewart." It cannot be said that our destroyers have been very successful. During last summer a race was arranged from Sandy Hook to Hampton Roads, in which several of the boats broke down and the winners fell far below their trial speeds. It is believed by our naval constructors that it is wiser to build larger and stronger boats with greater cruising radius, and be satisfied with a moderate speed of from 24 to 25 knots. It is claimed that such boats could repeat their trial speed in actual service under any but the most extreme conditions, and that they would be free from the ever-recurring breakdowns which render our present destroyers so unreliable. Hence the present intention of the government is to build five 800-ton destroyers in which the weights allotted to hull and engines will be sufficient to render them serviceable in any kind of weather. These boats are to be driven by Parsons turbines. We think it would be wise to add to the displacement, and raise the speed to at least 30 knots.

We have also added to the navy 22 torpedo boats of from 150 to 340 tons displacement, and of from 23 to 30 knots speed, the particulars of which are given in the tabular summary of the navy on another page.

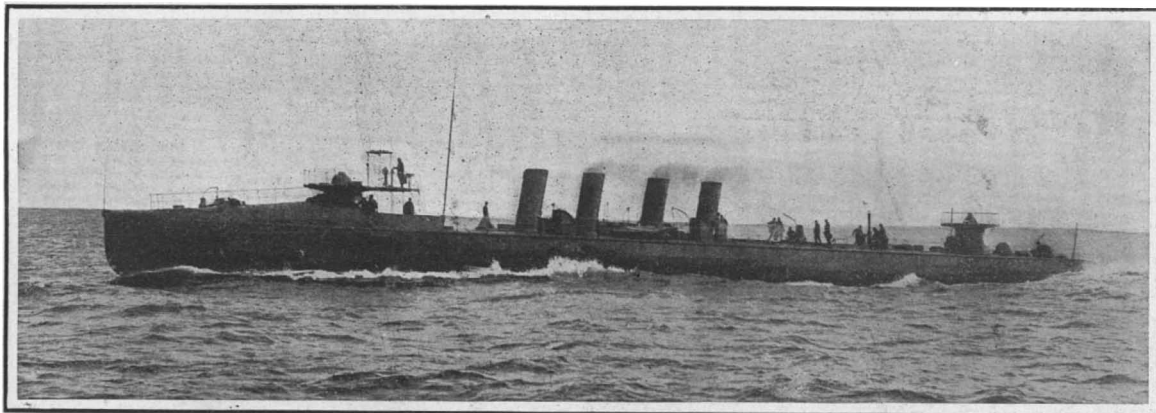

Length, 240 feet 7 inches. **Beam,** 22 feet 3 inches. **Draft,** 6 feet 8 inches. **Displacement,** 430 tons. **Horse Power,** 6,425. **Speed,** 28 knots.

TORPEDO-BOAT DESTROYER "MACDONOUGH." CLASS OF SIXTEEN VESSELS.

ber supply, it will do a great deal toward aiding in the preservation of the forests of the United States.

The output of coal in Peru in 1906 was 79,900 tons, as against 75,300 tons in the previous year. The output of oil increased from 50,000 tons to 71,000 tons. The greater bulk of the coal was raised in the Cerro de Pasco district. The copper output showed an increase over the previous year, and amounted to 13,500 tons, this figure including ingots, mattes, and mineral.

bird and animal reserves on the Pacific coast, as well as increasing certain forest reserves. The action was the outcome of the campaign undertaken by the National Association of Audubon Societies, to prevent the extermination of the sealion and of certain birds inhabiting the small islands along the northwestern Pacific coast. One of the reserves on the coast of Oregon embraces a number of rocky islets which are worthless for any other purpose. In spite of this fact, they are inhabited by a vast number of sea birds. The

WARSHIP TONNAGE OF THE PRINCIPAL NAVAL POWERS.

On a given amount of displacement, two competent naval architects will produce two ships which, while they may differ very widely in details, are apt to represent about the same amount of military efficiency in the total. What one gains in gun power, the other will exhibit in superior armor protection. Where one excels in speed the other will show great endurance or cruising radius, and so on. And if in estimating the strength of two navies by displacement a proper deduction be made of obsolete ships, and only those be included in the comparison which have real fighting value, a fairly accurate rough-and-ready estimate of relative power may be obtained. This is the principle of comparison which has been followed by the Office of Naval Intelligence of the Navy Department in a table which they have just issued showing the comparative warship tonnage of the principal naval powers. It is simply a statement of the total displacement of all the ships of each navy without taking any account of the particular design of the individual ships which make up that total. It includes all the ships actually constructed of a thousand tons or more displacement, and all the torpedo craft of more than fifty tons. The vessels excluded from this comparison are as follows: Those over twenty years old unless they have been reconstructed and rearmed since 1900; transports, colliers, repair ships, torpedo-depot ships, converted merchant vessels or yachts; vessels of less than 1,000 tons, except torpedo craft of less than 50 tons. With reference

VESSELS BUILT JUNE 1, 1907.

	Battleships.*	Armored Cruisers.	Cruisers.†	Destroyers.	Torpedo Boats.	Submarines.	Coast Defense Vessels.‡
England.....	52	32	90	142	47	39	0
France.....	19	19	28	35	257	41	12
United States.....	22	10	41	16	32	12	11
Germany.....	22	8	38	60	48	1	3
Japan.....	11	11	19	54	77	7	3
Russia.....	5	4	15	93	57	25	4
Italy.....	10	6	11	13	66	3	6
Austria.....	3	3	5		86	0	

* Battleships, first-class, are those of (about) 10,000 tons or more displacement.
† Includes all unarmored cruising vessels above 1,000 tons displacement.
‡ Includes smaller battleships and monitors. No more vessels of this class are being proposed or built by the great powers.


to the table summarizing the number of ships of each class possessed by the navy, it should be noted that battleships of the first class are those of about 10,000 tons or more displacement; that under the head of cruisers are included all unarmored cruising vessels above 1,000 tons displacement; and that under coast-defense vessels are included the small battleships and monitors, regarding which it should be noted that no more vessels of this class are being proposed or built by the great powers.

It should also be noted that in making comparisons of naval strength, and particularly of naval increase, the fact should be taken into consideration that the rapidity of construction varies greatly in different countries. In England, Germany, and Japan, the battleships and armored cruisers are completed in from two to three years; in the United States, from three to four years; and in France, Italy, and Russia, not less than four years are required.

It will be seen from the accompanying diagram that Great Britain continues to hold her commanding lead among the naval powers, with a total tonnage of 1,633,116, which is two and two-thirds as much as that of the second power, which is the United States with 611,616 tons. France comes third with 609,079 tons, Germany fourth with 529,032 tons, and Japan fifth with 374,701 tons. If all the vessels at present building were completed, France and the United States would change places, the position of the other powers remaining the same. Great Britain would have 1,821,610 tons, France 836,112 tons, the United States 771,758 tons, Germany 680,602 tons, and Japan 451,320 tons.

Some ingenious and more or less reliable estimates of naval strength have been made, in which the ships are estimated according to a system of points, so much for guns, so much for armor, so much for speed, with a certain percentage of reduction for age; and, undoubtedly, this is the true way to institute the comparison. But even here, the result is not conclusive; for the reason that it takes no account whatever of

(Continued on page 431.)

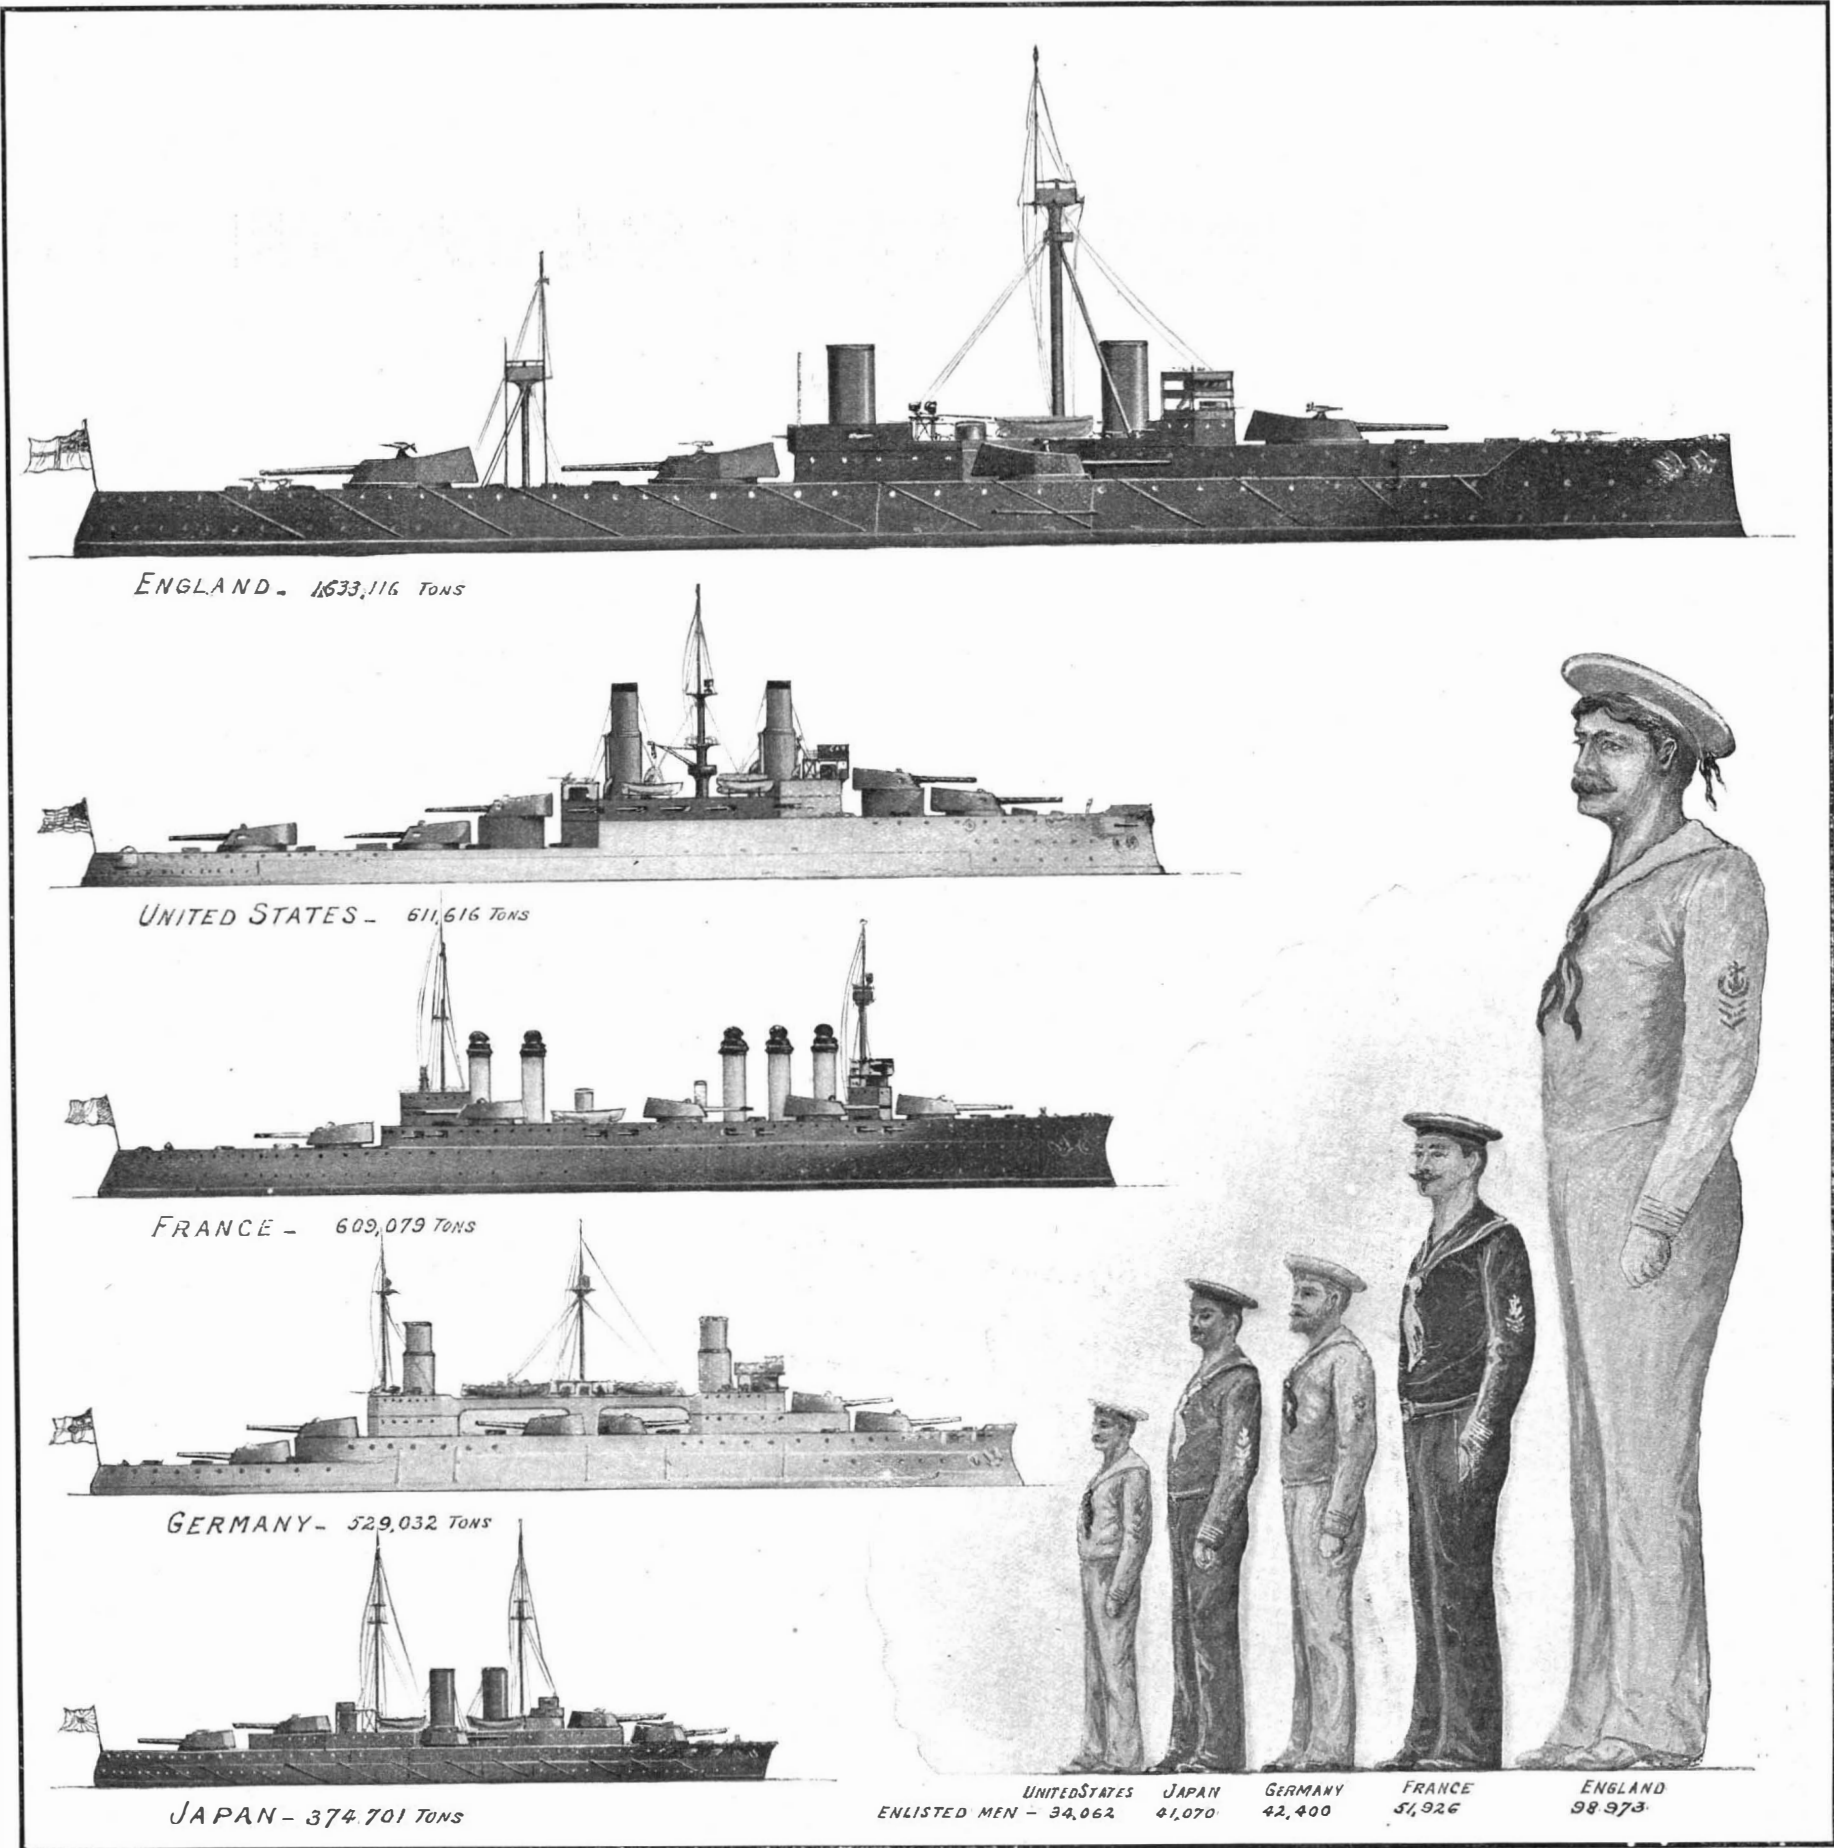

COMPARATIVE STRENGTH OF LEADING NAVAL POWERS IN SHIPS AND ENLISTED MEN

THE UNITED STATES NAVAL ACADEMY.

BY LIEUTENANT-COMMANDER EDWARD L. BEACH, U. S. N.



IN the Naval Academy at Annapolis the government has spent \$10,000,000 in the last nine years, with the result that the school now has magnificent massive stone buildings designed to last for all time. The most important building is Bancroft Hall, where the midshipmen are quartered and mess. In the center of this, facing Chesapeake Bay, is the beautiful Memorial Hall, considered by competent architects to be of exquisite design. On one end of Bancroft Hall is the Armory, on the other end the Seamanship and Gymnasium building. These are all buildings of huge dimensions, and yet form but different parts of one main building.

In viewing these structures one is impressed by the ambitious arches of the Armory, and the ornamentation of the exterior of all this stone work.

The next in importance is the Academic building. In this are the library, the auditorium, class and lecture rooms, the educational electric plant, the chemical laboratories. The front of the Academic building is especially beautiful.

Next comes the Steam Engineering building, of enormous size. This includes the machine shop, foundry, and other shops and rooms.

The Memorial Chapel with its ambitious dome is perhaps the most striking of all the buildings. In its crypt the ashes of John Paul Jones will find a worthy resting place.

The purpose of all this is to provide a place where young men may be trained for commissions in the navy. The duties devolving upon officers on shipboard determine the scope, extent, and nature of the Annapolis training.

Aboard ship officers control an organization that moves with absolute precision; they are called upon to manage and care for boilers and steam engines and their appurtenances, for electric and hydraulic and air engines, for guns, turrets, torpedoes, and explosives. They must direct the workings of large bodies of men under various circumstances, manage boats in bad weather, maneuver and navigate the ship. These required duties regulate the nature of the training at Annapolis of the young men who will soon be called upon to perform them.

Annapolis does not produce admirals and captains; higher naval training comes with service afloat under responsible duties. But the Naval Academy has a field of its own of great importance. It selects and sifts and molds the material out of which eventually high officers will be made. While at the Academy it surrounds the midshipman with naval atmosphere and

tradition, and sends him to sea after four years of severe training ready to commence his life's work.

ORGANIZATION.

The Naval Academy is directly under the Chief of the Bureau of Navigation. It is in charge of the superintendent, a naval officer of the rank of commander, captain, or rear admiral. In matters of discipline affecting officers, midshipmen, and enlisted men, the superintendent is in supreme control.

Next to the superintendent in rank and authority, and in immediate charge of the midshipmen, is the commandant of midshipmen. The discipline and control of the midshipmen is the special duty of the commandant. This is done under the general direction of the superintendent, but it is only one of many duties devolving upon that officer. He is also responsible for the proper expenditure of vast sums of money, for the

commissioned naval officers and twenty-six civilian professors and instructors at the Naval Academy concerned in instructing the midshipmen. These are divided up into the different departments, there being one head and a number of assistants to each department.

Naval officers are assigned to all departments. In addition, to the departments which may be characterized as non-professional, such as the English and modern language departments, the civilian professors are detailed.

In the professional departments, such as seamanship and ordnance and gunnery, theoretical instruction is given by recitations on prescribed lessons, as well as practical instruction by varied drills pertaining to the respective departments. Thus ordnance and gunnery will have charge of all infantry and artillery, great gun, and torpedo drills; seamanship, of all boat and sail drills; marine engineering, of all shop and steam drills.

Officers ordered to the Naval Academy are always just from sea duty. Until recently there have never been more than three or four civilian instructors employed in the instruction of midshipmen. It has always been the practice to detail seagoing officers for these duties, in modern language and mathematical instruction as well as in navigation and seamanship studies. The purpose has been to surround midshipmen with nothing but a naval atmosphere, and those best qualified to do this are officers fresh from sea service; the idea is that association in a recitation room with a naval officer will be in a general way beneficial to the midshipmen, irrespective of what the officer may be teaching.


An officer's tour of duty here is two years, at the end of which time he is ordered to sea. All officers are subject to Naval Academy detail, and must be prepared to teach, not only what they have recently been practicing on board ship, but also subjects that

may not be so familiar. An officer ordered to Naval Academy duty does not know to which department he will be assigned, and at times the work of preparation for the next day's recitations causes many officers to burn the midnight oil.


On the Academy grounds there are fifty sets of quarters provided for officers having families, and a large number of suites for bachelors in the officers' mess.

Duty at Annapolis is very pleasant, all are interested in the same thing and in each other. A civilian would inevitably soon be tired by the amount of shop that is talked, but this is natural to the naval officer where his intimates are part of the same organization, and interested in the same things he is. Social matters here are continuous throughout the year. There are balls and teas and card parties and dinners constantly on-

(Continued on page 431.)

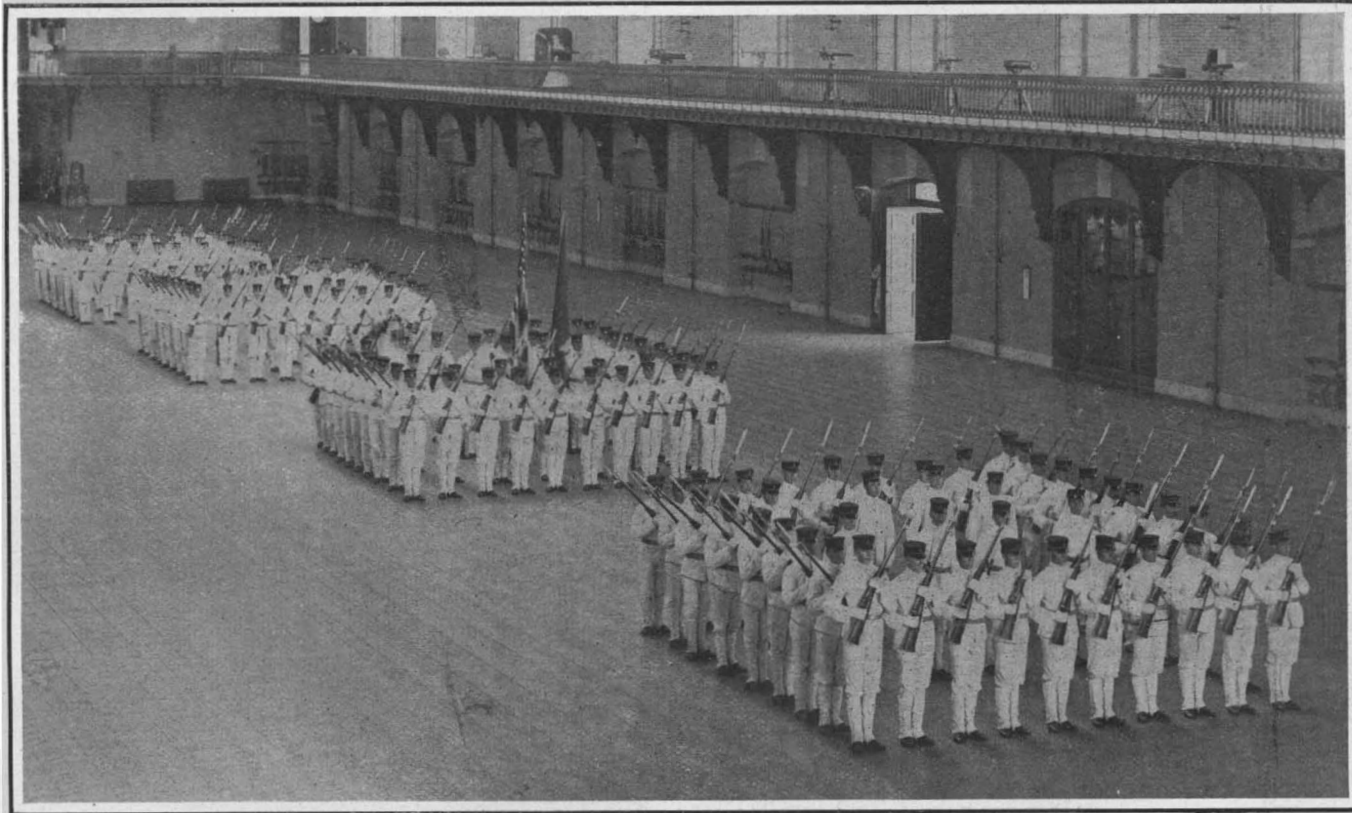

A Drill in the Armory.

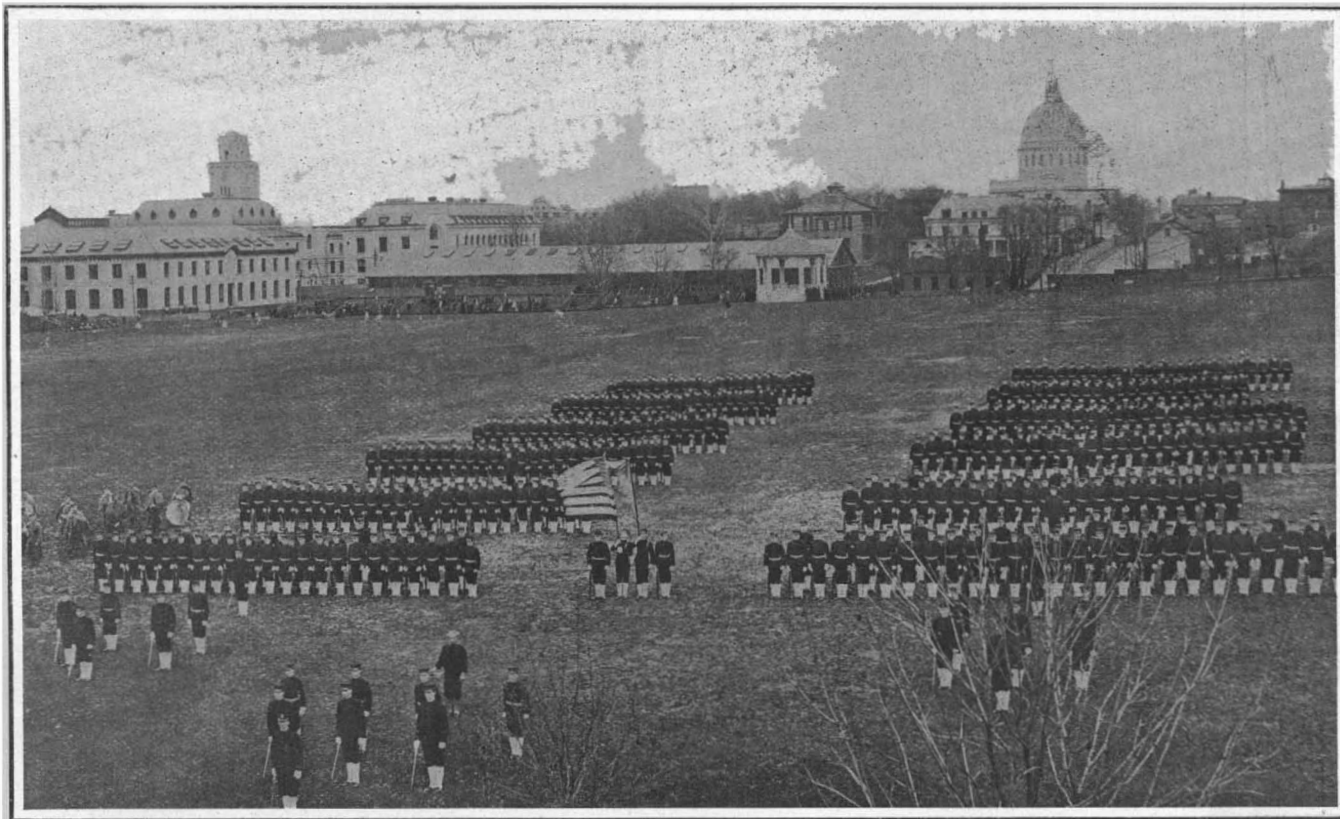

The Entire Battalion on the Parade Ground.


THE UNITED STATES NAVAL ACADEMY.

condition of the *matériel* as well as the personnel. There are eight hundred and fifty midshipmen now at the Academy, but there is also a vast educational plant, five warships with their crews, six torpedo boats fully commissioned, and hundreds of workmen, all coming under the superintendent's orders.

In scholastic matters affecting midshipmen, the Academic Board, corresponding to the faculty of a college, decides. This board is composed of the superintendent and the heads of the various academic departments.


These departments are as follows: Discipline, seamanship, ordnance and gunnery, navigation, marine engineering and naval construction, mathematics, physics and chemistry, electrical engineering, English studies, modern languages.

Besides the superintendent there are eighty-five

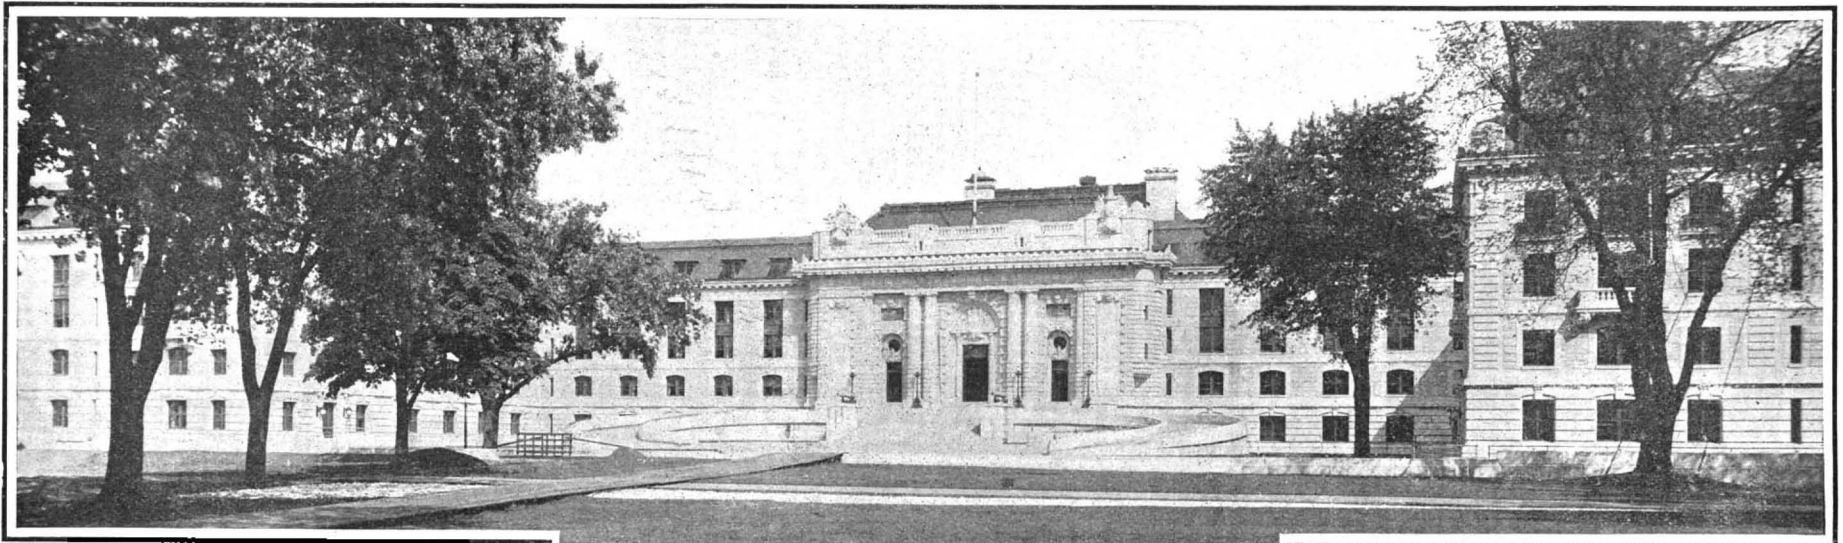


A General View of Bancroft Hall.


Here 850 Midshipmen Are Quartered.

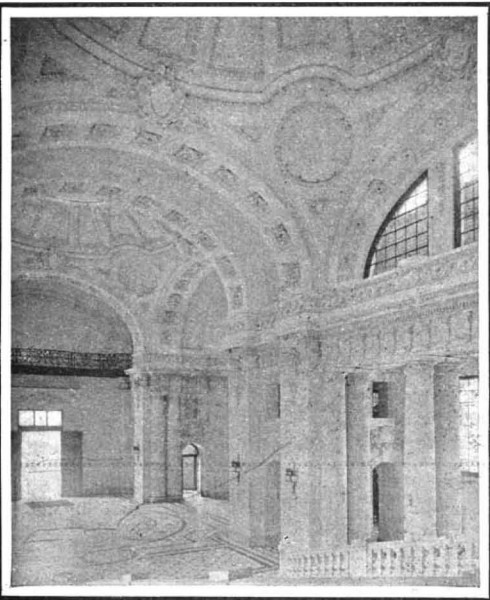


The Rotunda of Bancroft Hall.

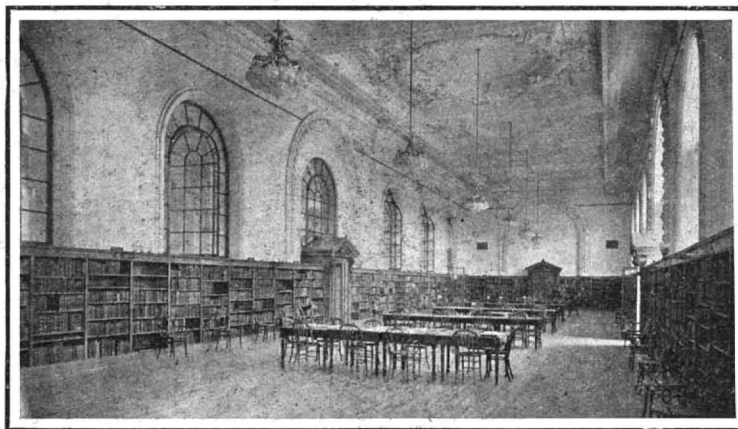


The Library. On the Shelves Are 50,000 Books.

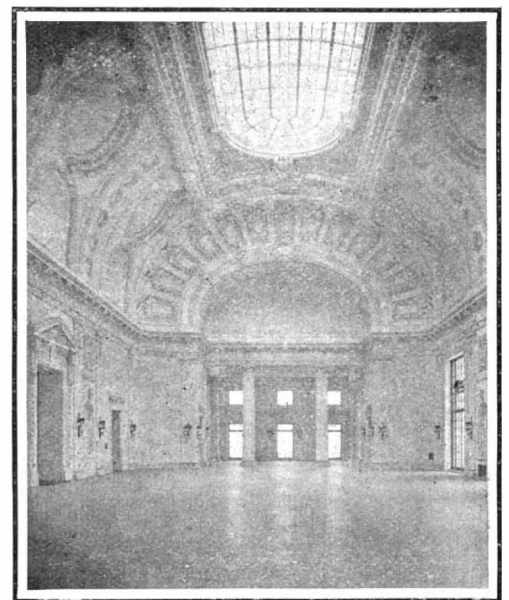


The Interior of Memorial Hall.

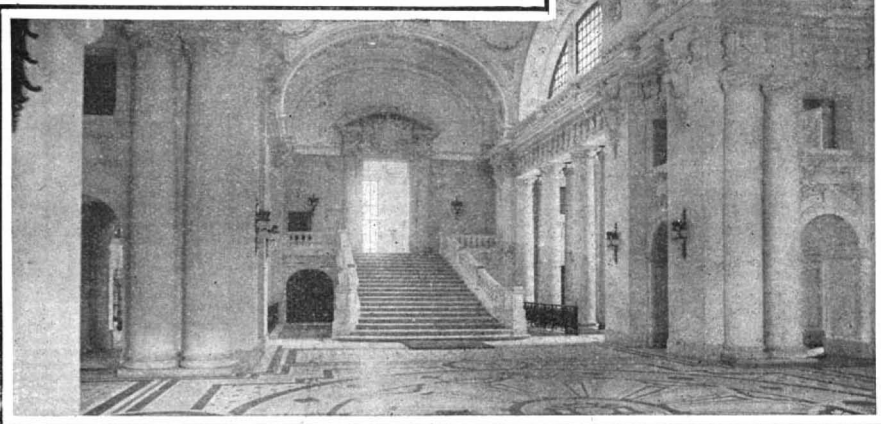

The Rotunda of Bancroft Hall.

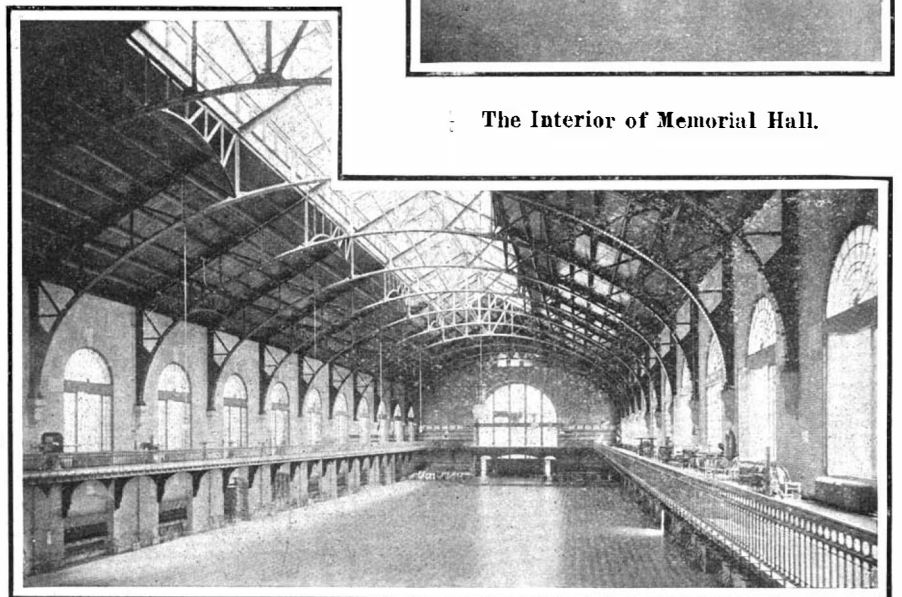


Interior View of the Armory.

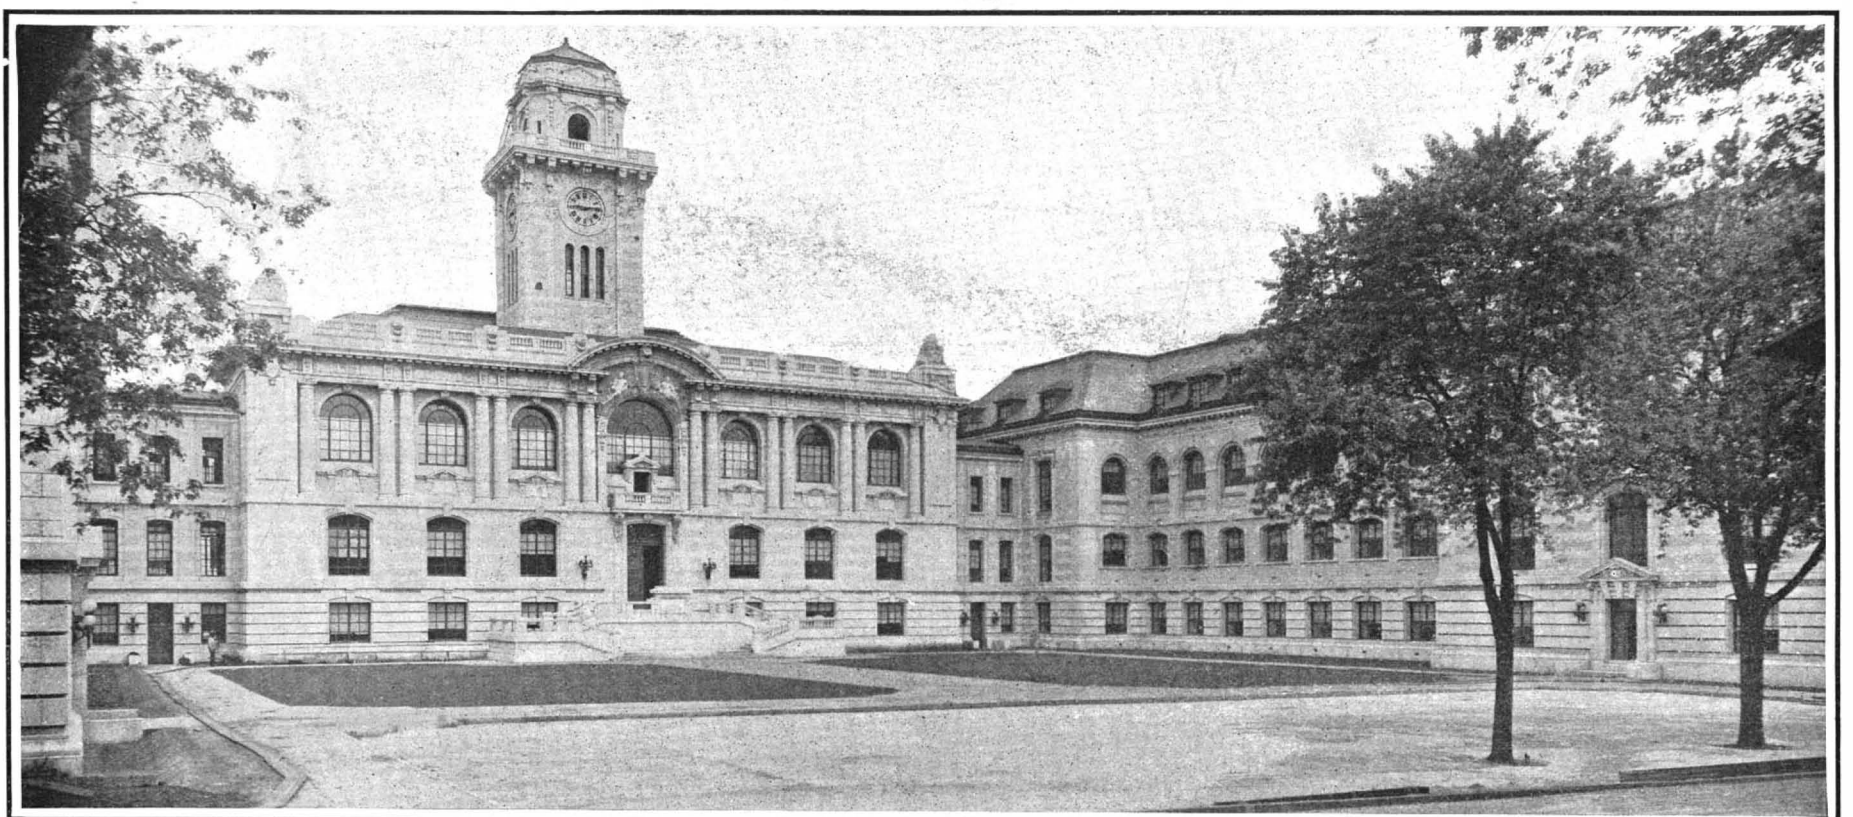


The Academic Building. Erected at a Cost of \$1,500,000.


THE UNITED STATES NAVAL ACADEMY.

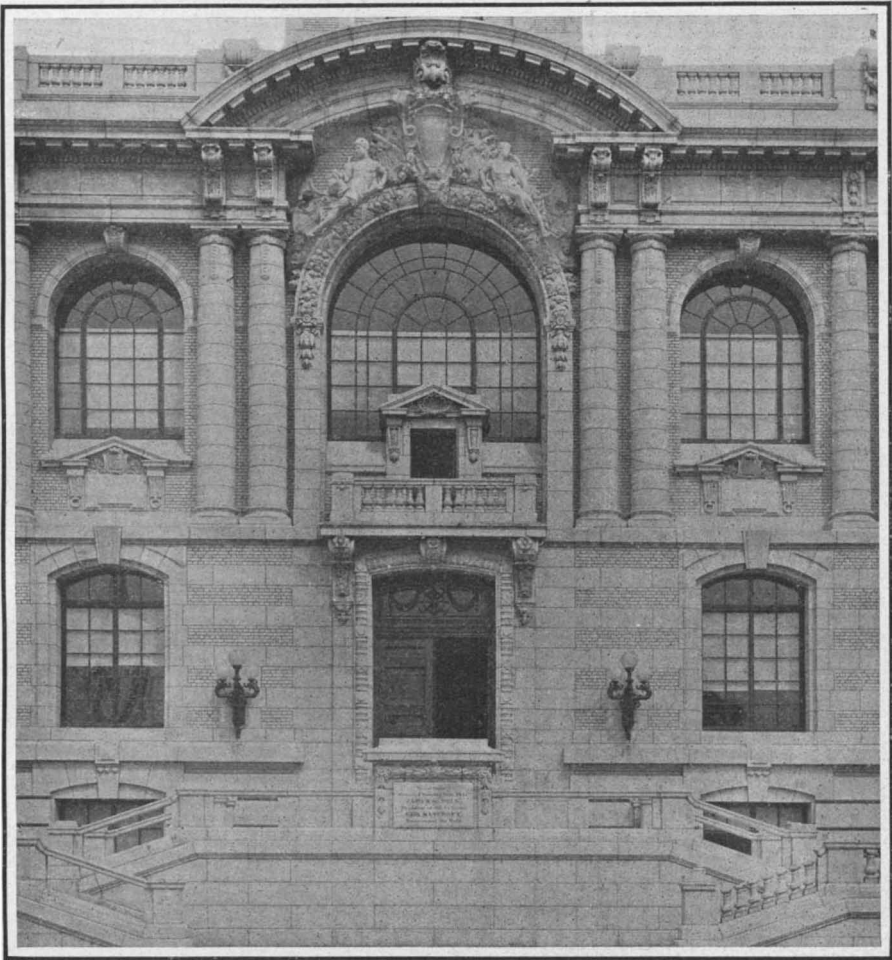

Entrance to the Academic Building.

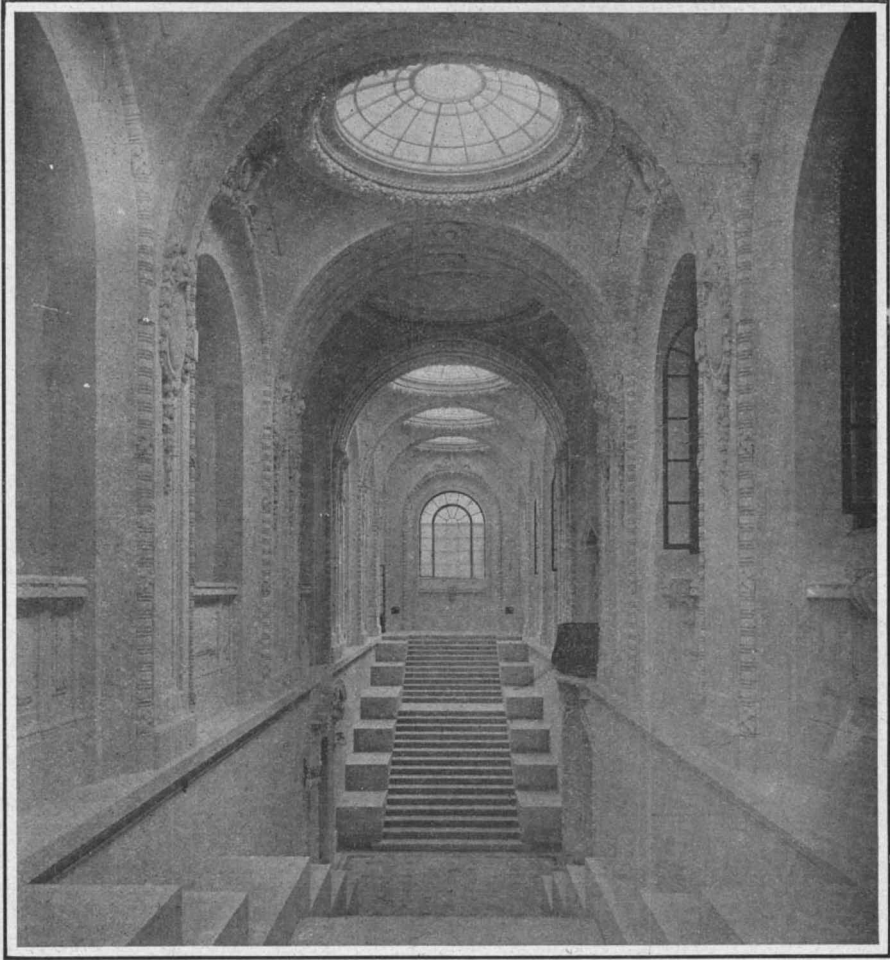

Academic Building—Entrance to the Library.

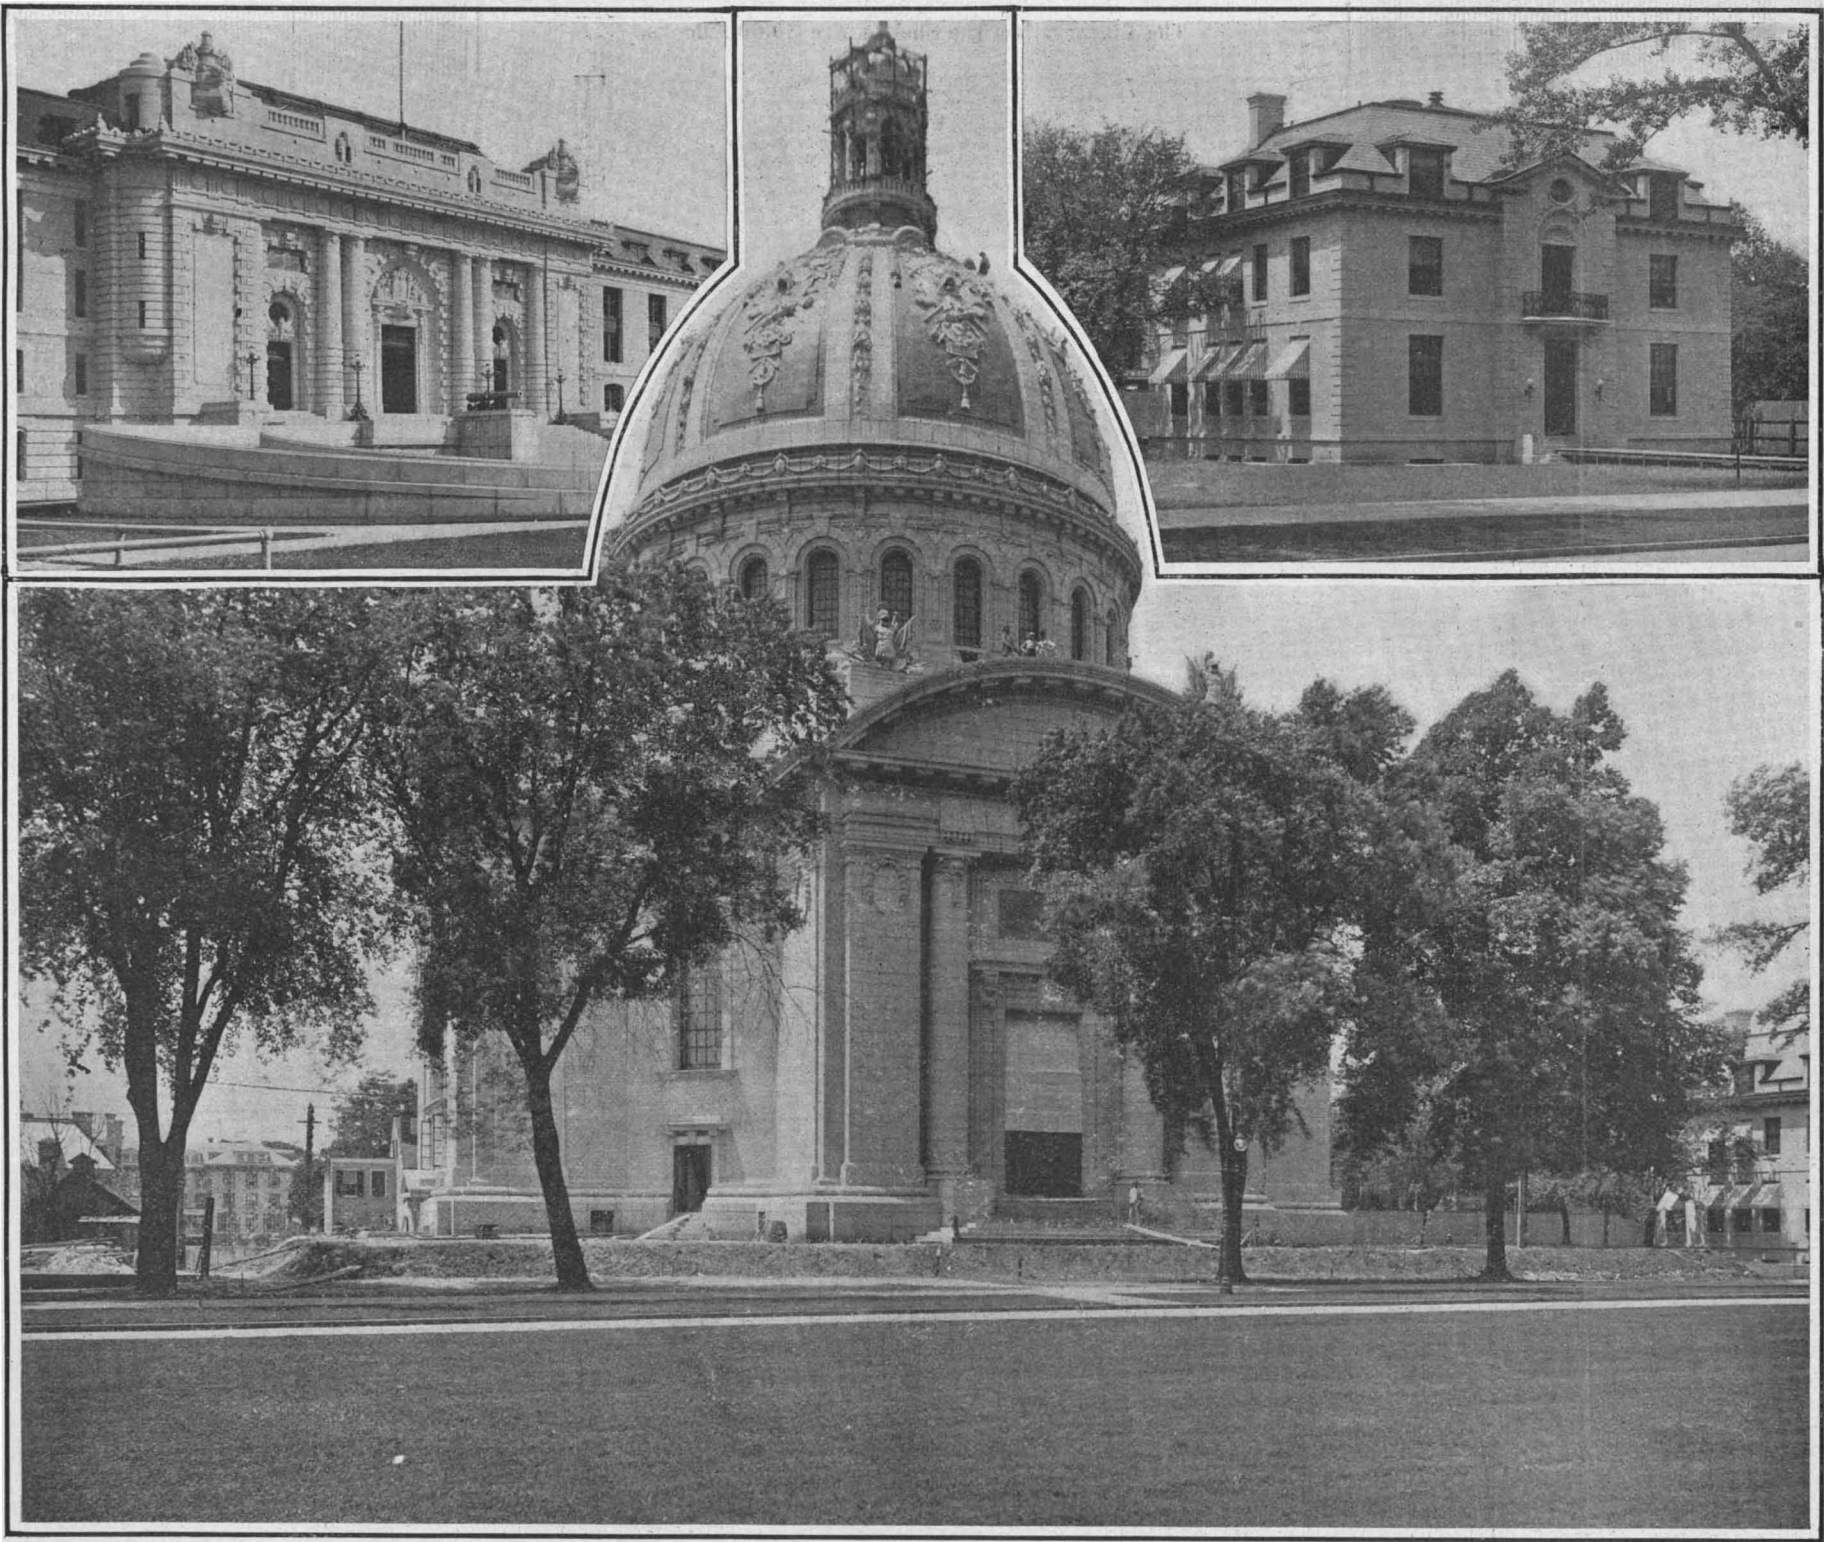

Entrance to Bancroft Hall.

The Superintendent's Offices.

Memorial Chapel, Which Cost Over \$400,000 and Is Not Yet Completed. The Crypt Will Contain Paul Jones's Body.

THE UNITED STATES NAVAL ACADEMY.

SIMPLE EXPLANATION OF MODEL BASIN METHODS.

BY D. W. TAYLOR, NAVAL CONSTRUCTOR, U. S. N.

The primary work of an experimental model basin is the estimation, with reasonable accuracy, of the resistance and horse-power of full-sized ships from experiments with small and inexpensive models.

The first experimental model basin was built nearly forty years ago by Mr. William Froude in his garden near Torquay, England. It was soon taken over by the Admiralty. The second was built by an enterprising firm of Clyde ship-builders at Dumbarton, Scotland, a little more than twenty years ago.

During the last ten years the number of model basins has increased rapidly. Besides England, there are now government basins in Italy, Russia, the United States, Germany, and France, and there are private basins in England, Germany, and the United States. In the United States the government basin at Washington began work in 1899. There is a private basin at the University of Michigan, and at Cornell University a canal used for hydraulic experiments is also used, to some extent, for experiments with models of ships and propellers. Existing basins are from 300 to 550 feet long, from 20 to 45 feet wide, and from 8 to 14 feet deep.

All of these experimental basins rely upon the principles first enunciated and applied in practice to vessels by Mr. William Froude. The law of Comparison, or Froude's law, as it is frequently called, teaches us that certain resistances of ships and models at corresponding speeds vary directly as their displacements. That is to say, at speeds proportional to the square roots of any similar linear dimensions (preferably length), resistances which obey Froude's law are directly as the displacements or as the cubes of similar linear dimensions. Mr. Froude demonstrated conclusively the value of his methods by showing that the actual resistance of a full-sized ship—the English naval vessel "Greyhound"—as determined by towing her, agreed very closely with resistance estimated by his methods from the resistance of a small model.

There are three main components of the resistance of a ship, viz., the skin friction, or the resistance due to the rubbing of the water on the surface; the eddy resistance, or resistance due to the formation of eddies, such as those behind stern-posts, struts, etc.; and the wave-making resistance, or the resistance due to the creation of waves as the ship advances through the water. The first and the third of these elements are the more important in practice.

The eddy resistance in properly designed ships is not great, and for practical purposes is classed with the wave-making resistance, the two combined forming what is often called the residuary resistance. It is the residuary resistance to which the law of comparison is applied directly.

The skin friction does not follow the law of comparison, but, fortunately, it can be estimated with reasonable approach to accuracy for both model and ship.

The quantities that have to be dealt with in model experiments are small, and it is necessary that the models be constructed with accuracy and tested by a reliable apparatus with much care. The majority of model basins use paraffin wax in the construction of models, following the practice originally established by Mr. Froude. Paraffin cannot be made to stand the summer heat of Washington without inadmissible change of form, so that at the United States basin wood is used as material for the models. This is more expensive, but, otherwise, has everything in its favor. It enables models 20 feet in length to be regularly used, while with paraffin from 12 to 14 feet is the greatest practicable length. Whether of paraffin or wood, a model must represent accurately to scale the under-water body of its corresponding ship and have a thoroughly smooth surface. At the Washington basin the principal shaping of the models is done by machinery, finishing touches being put on by hand.

When preparing for testing, the model is carefully weighted in the water to the exact displacement and trim corresponding to the full-sized ship, and then towed at various speeds, through recording dynamometric apparatus, from a carriage which runs back

The recorded resistances are plotted as ordinates above the speeds, thus giving a number of spots through which a fair average curve is drawn, giving the total resistance of the model.

Fig. 1 shows from an actual model test a number of spots and the resistance curve *RR* drawn through them. The model represented a collier with a long parallel middle body and was tested to a corresponding speed higher than such a vessel could obtain in service. Its resistance curve shows up well the "humps" and "hollows" which are due to the fact that at some speeds the waves caused by the bow accentuate those caused by the stern, giving a "hump," while at other speeds the waves from the bow partially neutralize those at the stern, causing a "hollow." The curves in Fig. 1 showing the change of level of bow and stern are typical. In practically every case, vessels of normal types settle bodily both forward and aft, as speed increases, with but little change of trim until, at a critical speed, which is in knots about 1.15 the square root of the length in feet (5.25 knots for a 20-foot model), the bow begins to rise sharply and the stern to settle sharply. Not many actual ships are fast enough to reach this critical speed.

The displacement, wetted surface, and all other necessary quantities in connection with the model having been calculated in advance, the first step in the reduction of the results is to plot a curve such as *FF* in Fig. 1, which, being the frictional resistance of a plane 20 feet long and having the same surface as the model, is taken as representing the frictional resistance of the model. It is important that the surface be taken as 20 feet long, because it has been found by numerous experiments that the coefficient of friction of a smooth plane surface in water varies with the length; the greater the length the smaller the coefficient of friction. The index or power of the speed according to which the friction varies also changes somewhat with the length; but for lengths such as those of actual ships the index is practically constant at 1.83.

The intercepts in Fig. 1 between the curves *RR* and *FF* give the residuary resistance. The application of the law of comparison to this residuary resistance is comparatively simple. Thus, at 4 knots model speed the residuary resistance is 7.73 pounds. Suppose the 20-foot model represents a ship 500 feet long. Then the linear ratio between model and ship is 25. The displacements are as the cube of the linear ratio, or as 15,625. Corresponding speeds will be as $\sqrt{25}$, or ship speed will be 5 times model speed. The residuary resistance of the ship in fresh water would be, then, $15,625 \times 7.73$, or, in round numbers, 120,800 pounds at $5 \times 4 = 20$ knots. As a general thing, however, while model results are obtained in fresh water, we wish to know the resistance of a ship in salt water. All resistances are taken to vary as the density of the water, which is an ample approximation. So, to obtain the resistance of the ship in salt water, we multiply 120,800 pounds by the ratio between fresh and salt water, which is 1.026. Thus we determine the residuary resistance of the ship in salt water to be 123,900 pounds.

We need still to calculate its frictional resistance. We know, by calculation, its wetted surface, and for the coefficient of friction we use Froude's or Tideman's frictional coefficients, obtained from experiments with plane surfaces many years ago, and which, it may be remarked, have been confirmed by such experiments as have been made on the subject at the United States model basin. But some experiments on large and long planes, with surfaces such as commonly presented by ships' bottoms, towed at high speeds, would be of great value.

The coefficients in use are deduced from experiments with smooth planes of comparatively small dimensions and towed at comparatively low speeds. Actual ships' bottoms are seldom as smooth as planes are made, and their dimensions are much greater than the planes hitherto tested. The needed investigation, however, would have to be carried on page 420.)

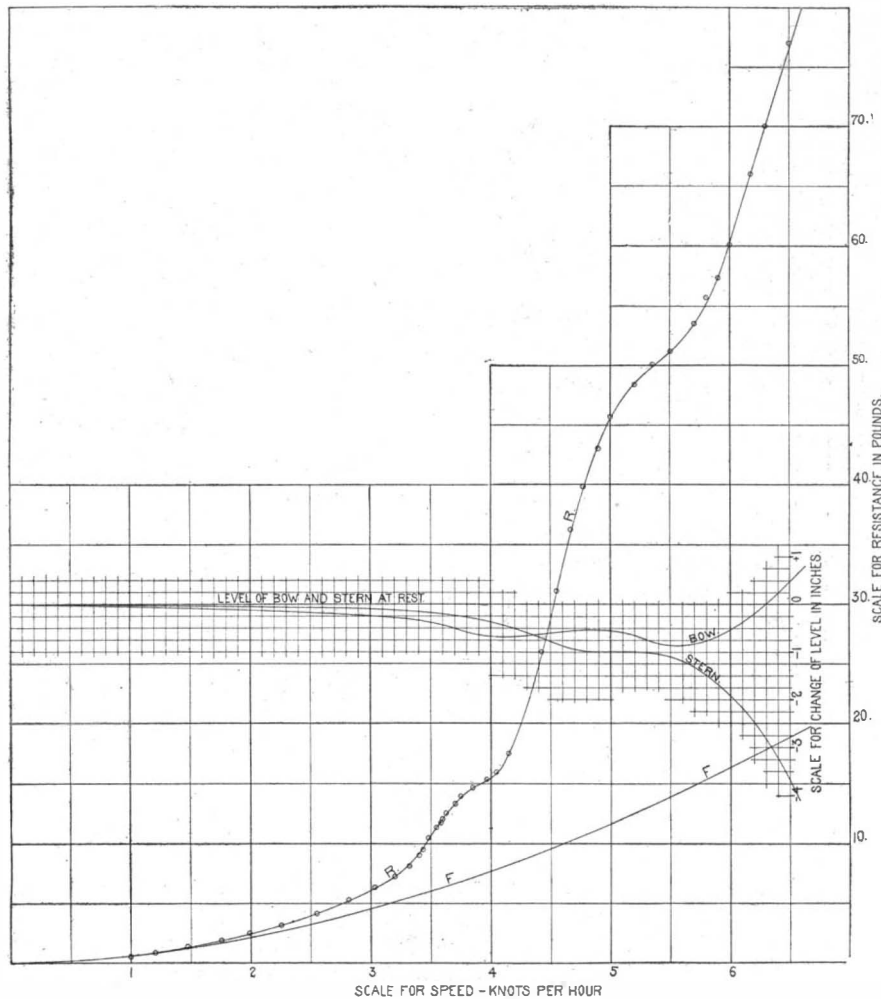


Fig. 1.—Curves of Resistance and Change of Level of Model. Length, 20 Feet; Breadth, 2.076 Feet; Draft, 0.863 Feet; Displacement, 1,694 Pounds.




Fig. 2.—Speed of Ship About 18.5 Knots. Comparison of Wave Profile Fore and Aft Estimated from Model Runs with That Observed on Trials of Ship.

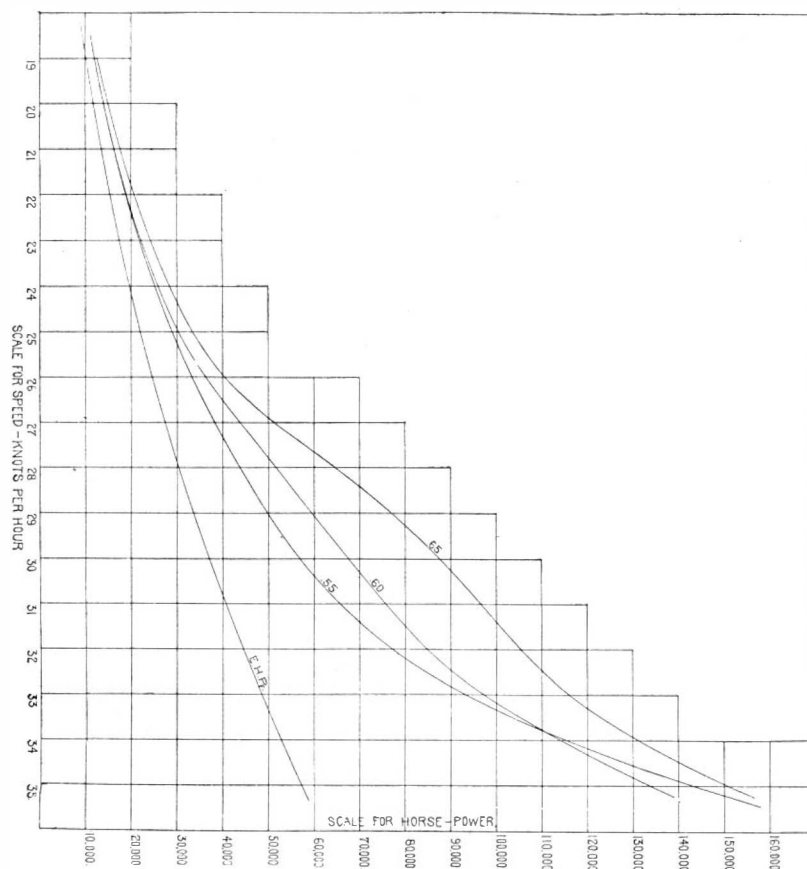


Fig. 3.—Curves of Effective Horse-Power for Ship of 40,000 Tons Displacement, 800 Feet Long and 0.55, 0.60, and 0.65 Cylindrical Coefficient.

SIMPLE EXPLANATION OF MODEL BASIN METHODS.

and forth, and is arranged so that it can tow models at a large number of speeds, the speed of each run being accurately determined and recorded. At the Washington basin electricity was used for the first time to drive the towing carriage. This feature has been copied in all basins of later date.

RECENTLY PATENTED INVENTIONS. Pertaining to Apparel.

SHIRT-WAIST-RETAINING BELT.—E. J. MONTIGNY, New York, N. Y. One purpose of the invention is to provide a belt especially designed to be worn in engagement with the outside of a shirtwaist, that is, between the waist line of the skirt and the shirtwaist, which belt will effectually hold the shirtwaist down, and will not at any point in its length have a tendency to work upward so as to appear above the skirt waist-band.

Electrical Devices.

CONNECTING DEVICE.—G. A. SCHNAUFER and H. G. SMOCK, Denver, Col. In this patent the invention has reference to electrical connections, and more particularly to a connecting device for telephone, telegraph and electric lighting wires, the purpose being to render it easy to tap on or take off wires leading from the ordinary service lines.

TIME-CONTROLLED ELECTRIC SWITCH.—J. W. WOOD, Mobile, Ala. The invention relates to electric switches, the more particular object being to provide such switches with means whereby a timepiece may control the movements of the switch. Further, it relates to the provision of connections from the timepiece to the switch, for enabling the timepiece to be set so as to cause the movement of the switch to take place at any desired moment.

Of General Interest.

CALENDAR.—J. FERRERES, Habana, Cuba. The invention relates more particularly to calendars in which the same numerals and designations of the days of the week may be employed for each month in the year by adjusting their relative positions, and also may be used for any number of years, thus rendering the calendar good for an indefinite period.

FIRE-EXTINGUISHER.—S. Q. STANLEY, Casper, Wyoming. The invention resides in a receptacle adapted to contain extinguishing material in granular or powdered condition, an explosive cartridge arranged within the vessel, and fuses extending from the cartridge to the exterior of the vessel, the fuses being designed, when ignited, to effect explosion of cartridge, or igniter, and cause violent breakage of vessel, and scattering the powder over considerable area, and smothering the flames.

NON-REFILLABLE BOTTLE.—A. WICKE, New York, N. Y. The invention pertains to improvements in bottles and more particularly to means whereby the bottle, after having once been filled and emptied, cannot be refilled. It is designed for use in connection with an ordinary form of bottle and readily applied thereto, thus rendering the device capable of more universal use, and serving to provide a simple and inexpensive construction.

BOX.—F. E. WARD, New York, N. Y. The underlying purpose in this case is to provide a box in which the opening movement will be limited, preventing the parts from complete separation, and which may be conveniently hung on the wall in open position so that the matches may be freely taken from the box. It may be constructed of paper, cardboard, wood veneer, or the like.

CRUTCH.—A. D. WICK, Topeka, Kan. The purpose of the inventor is to produce a crutch the length of which can be adjusted to suit persons of different height. The special object has been to provide a construction which will accomplish this object without the use of springs or similar contrivances likely to get out of order.

CAPTIVE BALLOON.—H. A. HERVE, 1 Rue Hautefeuille, Paris, France. The object of this invention is to enable observations for military or scientific purposes to be made under a greater wind pressure or at a greater altitude for a given pressure of wind, while insuring greater stability of the car with a smaller tractive effort than in known systems of captive balloons under the combined conditions of strength and lightness necessary in such structures.

BREAD-SLICER.—H. FRANK, Lickingville, Pa. The slicer is especially useful for use in hotels, restaurants, and similar places where bread is sliced in large quantities. The inventor's aim is to produce a device which can be rapidly operated to slice the bread, the construction being such as to enable the thickness of the slices to be adjusted at will.

MINE-DOOR.—O. N. EARTHOM and T. G. GALLAHER, Adena, Ohio. The object of the improvement is to provide an efficient mine door for regulating the ventilation in mines and other similar workings, which is operable by a car for ore, coal, and the like, and which is so constructed that it opens and closes transversely of the mine passageway, thereby requiring less room for its operating than a swinging door.

BUTTER MEASURE AND CUTTER.—D. F. CURTIN, St. Louis, Mo. The invention pertains to improvements in devices for weighing and computing quantities of butter, its object being to produce a device which shall be simple and efficient, and one in which any given quantity of butter at a given price will be pressed into shape and cut from the mass of butter.

Hardware.

RAZOR-BLADE HOLDER.—S. FRAZIER, Bristol, Va. This is a device for holding blades when they are being stropped. The inventor's intention is to produce a device which is simple in construction and which can be readily operated to seize or release the razor blade

The "Octopus" Type



Holland Submarines

Superiority over all other types attested by findings of U. S. Navy Board after extensive tests in May and June, 1907.

The Electric Boat Company

11 Pine St., New York, U. S. A.


THE INTER-POLE MOTOR FOR INDIVIDUAL DRIVE

It's the **lightest, most compact** of motors. Speed ratios up to 6 to 1, on **single voltage, by field control.**

Sparkless at all loads and all speeds.

Equally satisfactory in any position.

See the bulletins and learn the details.

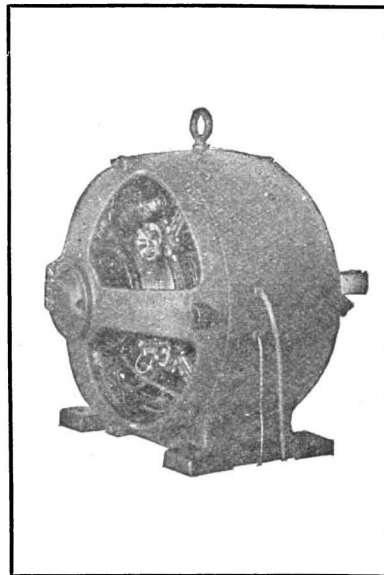

Electro-Dynamic Co.

BAYONNE, N. J.

PHILADELPHIA, PA.
Arcade Building

PITTSBURGH, PA.
200 Ninth Street

and which will hold the blade very securely for stropping.

IMPLEMENT FOR EXTRACTING SPIKES AND BOLTS.—S. F. EUBANK, Columbia, Ky. This nail and bolt extractor comprises a handle lever, jaws pivoted on the handle lever, a supplementary lever, a bolt passing transversely through the jaws near gripping edges thereon, a cam and ratchet wheel device operable by the supplementary lever for compressing the jaws, and a spring pressed by the jaws when the jaws are compressed and expanding them when they are released.

Heating and Lighting.

SECTIONAL STAND.—F. G. GRIMMER, Buffalo, N. Y. The invention is an improvement in stands of a flexible nature, more especially designed as a support for an incandescent lamp, but usable for carrying various other forms of lamps. The object is to provide a construction composed of a series of units movable one upon the other and forced together by resilient means which is adjustable, whereby the frictional engagement of the several units may be varied.

Railways and Their Accessories.

BRAKE MECHANISM FOR INCLINED RAILWAYS.—S. E. JACKMAN, New York, N. Y. The invention refers to brake mechanisms for inclined railways, such as shown and described in Letters Patent of the U. S., formerly granted to Mr. Jackman. His aim is to provide a mechanism, arranged to control the car on the home stretch, independently of the occupants of the car, with a view of checking the speed of the car and bringing it finally to a stop at the station. Mr. Jackman has also invented another brake mechanism for inclined railways and it refers to such as shown and described in Letters Patent of the U. S., formerly granted to him. The object of the present improvement is to provide a brake mechanism, arranged in the track and under the control of an operator stationed near it, to check the car speed wholly independent of the occupants, and to bring the car to a stop at the home station.

STATION-INDICATOR AND ADVERTISER.—A. P. BONNAFFONS, New Orleans, La. This invention is intended particularly for use in street railway service, but is useful in other connections. One object is to provide an indicator which will be automatically operated as the car passes along the track, and exhibit to the view of the passengers the name of the next station or street crossing.

CAR-DOOR.—R. HALL, Kenora, Ontario, Canada. This car-door is to be used auxiliary to the usual door of box cars, and is especially designed to facilitate the unloading of granular materials such as grain, coal, sand, and the like. Among other objects of the inventor is to provide a door that will safely retain the material while loading and when in transit; also one which can be readily and easily opened so that the material will freely run out to the angle of repose when it is desired to discharge the loaded car.

SIGNAL SYSTEM.—B. F. MERKEL, Salida, Col. This improvement has reference to signal systems, the more particular object being to provide a system for displaying a target directly over a track where it may be more readily seen by the engineer, and for housing this target as well as rendering it invisible when not in use.

SAFETY DEVICE FOR INCLINED RAILWAYS.—S. E. JACKMAN, New York, N. Y. The invention relates to devices such as shown and described in Letters Patent of the U. S., formerly granted to Mr. Jackman. The aim of the present invention is to provide a device, such as used in pleasure resorts, exhibition grounds, and the like, and arranged to prevent accidental return or downward movement of the car while traveling up the inclined track portion of the track in cases of accident to the propelling mechanism or other cause.

Pertaining to Vehicles.

FLEXIBLE WHEEL FOR MOTOR AND OTHER VEHICLES.—H. F. NICHOLS, Grenfell Street, Adelaide, South Australia, Australia. The object of this invention is to provide a resilient wheel which shall have the advantages of the pneumatic tire without its disadvantages such as the liability to puncture. The invention relates to wheels of the kind constructed with an outer flexible rim or tire and an inner rigid rim, with a series of springs arranged between and connecting them.

BOLSTER-PLATE FOR VEHICLES.—I. BROADHEAD, East Branch, N. Y. The purpose of this improvement is to provide a construction of bolster plates for the running gear of wagons, particularly lumber wagons, whereby the bolster is held rigid and the use of the king bolt is dispensed with, which latter article greatly impairs the strength of the axle, and whereby also the bolster cannot be accidentally separated from the sand bar.

POLE AND SHAFT FOR ROAD-VEHICLES.—J. A. MONTGOMERY, Walton, N. Y. This simple mechanism, properly applied on the thills of two-wheeled road carts and carriages, insures entire absence of their objectionable horse motion, retains their thills permanently in their original shape, and the inventor feels justified in claiming that it is the last part of the vehicle to require repair or wear out.

NOTE.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.


THE DEVELOPMENT OF OUR SUBMARINE FLEET.

The fleet of twelve submarines of the United States navy has been created entirely since the war, with one exception, the "Holland" being constructed several years prior to that time. In the following year seven additional submarines, known as the "Adder," "Grampus," "Moccasin," "Pike," "Porpoise," "Shark," and "Plunger," were authorized and subsequently built at

results. In three runs over the mile course, using only her gasoline engines, she averaged a little over 11 knots, the first run being made at 11.6 knots. Running submerged and using only her electric motors, she made a speed of about 10 knots. In the submergence test, while going at full speed on the surface, she shifted her motive power from gasoline engines to electric motors, filled her ballast tanks, and dived to

complicated in the telling, but by the use of forms and tables developed by experience it is rendered comparatively short and simple.

The law of comparison as applied to ships is a special case of the general mechanical law of similitude connecting the operation of any kind of model with the corresponding full-sized object. It is applicable to machines, such as steam engines, ventilating fans,

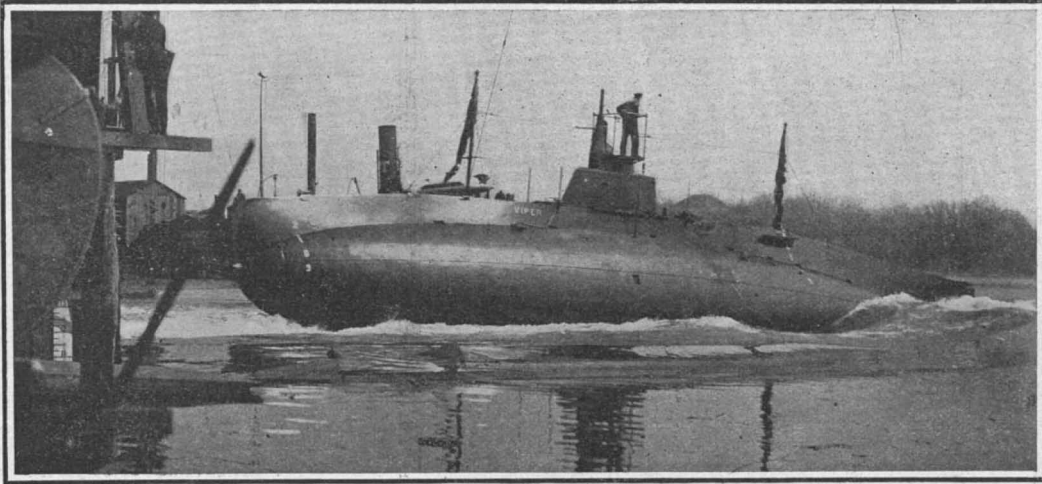

Launching a Submarine.

Elizabethport, N. J. The "Holland," which was purchased for purposes of experimentation and practice, is 54 feet in length over all, of 10 feet 3 inches beam, and of 74 tons displacement when submerged. She is driven on the surface by gasoline engines of 45 horsepower, and when submerged by an electric motor of 50 horsepower. She carries one torpedo tube. The other seven submarines are enlarged and improved "Hollands," 63 feet 10 inches in length, 11 feet 10½ inches in diameter, and of 122½ tons displacement submerged. The motive power consists of a 160-horse-power gasoline engine, which drives them at about 8½ knots on the surface, and a 70-horse-power electric motor which gives them, when submerged, a speed of about 7½ knots. In 1904 Congress authorized the construction of four additional submarines of much greater size and efficiency. Three of these, known as the "Cuttlefish," "Tarantula," and "Viper," are of one type, the "Octopus" being larger than the others. Although they follow broadly the general design of the earlier boats, they are much more powerful, have a wider radius of action, are of greater structural strength, of higher speed, and possess superior maneuvering qualities. The

a depth of 20 feet in 4 minutes and 20 seconds. In the test of the automatic devices for blowing the ballast in order to allow the boat to come to the surface in case of accident, she rose from a depth of 40 feet in 43 seconds. In the twenty-four hours' submergence test in 30 feet of water, she carried down a crew of sixteen men, and came to the surface next day with the men in good condition. The "Octopus" has been tested as to strength and watertightness by actual submergence to a depth of 200 feet.

SIMPLE EXPLANATION OF MODEL BASIN METHODS.

(Continued from page 418.)


ried on in open water, unless model basins in the future are built of much greater dimensions than those now existing. In the particular case we have been considering, the wetted surface of the ship was 38,230 feet. The coefficient of friction for a ship 500 feet long in salt water is from Tideman's tables 0.00904 and the 1.83 power of 20, the speed of the ship in knots, is 240.37. Hence, the frictional resistance in pounds is $38,230 \times 0.00904 \times 240.37 = 83,100$. The total resistance at 20 knots is, then, 207,000 pounds.

As a rule, since the practical application of model basin results is in connection with power, we wish to calculate—not

screw propellers, and others. It is necessary, however, that certain conditions be satisfied, the essential conditions as regards the motion of liquids being that the motions should be similar and that the pressures at corresponding points should be in the same ratio as the linear ratio between model and ship. This condition is fulfilled as regards the waves created by models and ships, careful observations and comparisons having shown that they correspond very closely, indeed.

Fig. 2 shows, for instance, the wave line, forward and aft, as measured against the side of a large United States battleship on trial and the corresponding wave line deduced from model experiments in the United States model basin. The coincidence is seen to be close, being practically exact as regards length of wave and within the limits of error of observation as regards height. On the actual ship the extreme height of the bow wave forward is some 16 or 17 feet above still water, while the height of the bow wave of the model at corresponding speed was only about 8 or 9 inches. There generally seems to be a slight tendency for the bow wave forward to be a shade lower than would be indicated from the model experiments, while the wave as measured aft is a little higher; but generally there is so much broken water aft on the full-sized ship that the wave is measured high.

In the case of the waves the uniform pressure of the atmosphere has no effect upon the result. Practically the same wave would be created if model or ship were running in a vacuum. When it comes to eddy resistance, however, the case is different, particularly eddy resistance around submerged objects, such as struts. Here the pressure of the atmosphere results in the fluid pressure at any given point of the model being much greater than it should be to correspond with the fluid pressure at the corresponding point of a full-sized ship. This excess pressure may prevent the formation of eddies in the case of

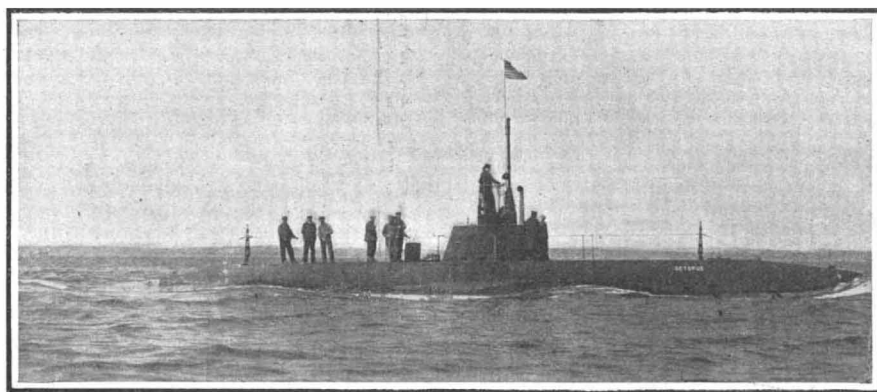

Running on the Surface.

three submarines of the "Cuttlefish" type are about 80 feet long over all, 12½ feet in diameter, and displace 175 tons. On the surface they are driven by gasoline engines at a speed of 10 knots, and in the submerged condition the electric motors have driven them over the mile course at a speed of 9 knots. They are supplied with a submarine bell signal system for communication with the surface. They submerge by filling various ballast tanks distributed throughout the boat. The reserve of buoyancy when in diving trim is from 500 to 1,000 pounds. To navigate the boat submerged the propellers are started, and by means of the diving rudders, which are turned downward, the axis of the vessel is inclined by the bow from 5 to 10 degrees. To maintain submergence after reaching the desired depth the diving rudders are shifted and the boat is thus held at the required depth. The process of diving is as follows: Water is admitted to the ballast tanks until buoyancy is reduced to the desired degree, which is generally between 500 and 1,000 pounds. The propellers are started and the diving rudders put down, the vessel descending on a downward incline. To return to the surface the diving rudders are put up, the boat traveling to the surface on an upward incline.


The trials of the "Octopus" lately carried out by a special trial board of the navy gave very gratifying

resistance, but what is known as effective horse-power; that is to say, horse-power which would be absorbed by the resistance at the speed of the ship. In the case in hand, for instance, the resistance at 20 knots is 207,000 pounds. A speed of 20 knots is a speed of 2026.6 feet per minute. Hence, the resistance will absorb 419,500,000 foot-pounds per minute and the effective horse-power would be $\frac{419,500,000}{33,000}$, or 12,700 in round numbers.

The process described above may seem somewhat



Rising from a Dive.

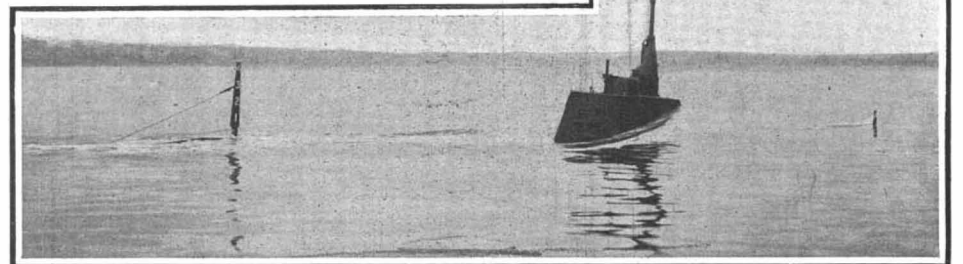


The "Octopus" Diving.

THE DEVELOPMENT OF OUR SUBMARINE FLEET.

the model which would appear if the fluid pressures were reduced to correspond to the pressures around the full-sized ship. This would not be the case behind a square stern-post, for instance, because the area in rear of this would be full of eddies for either model or ship. But we might have cases where eddying around

(Continued on page 433.)

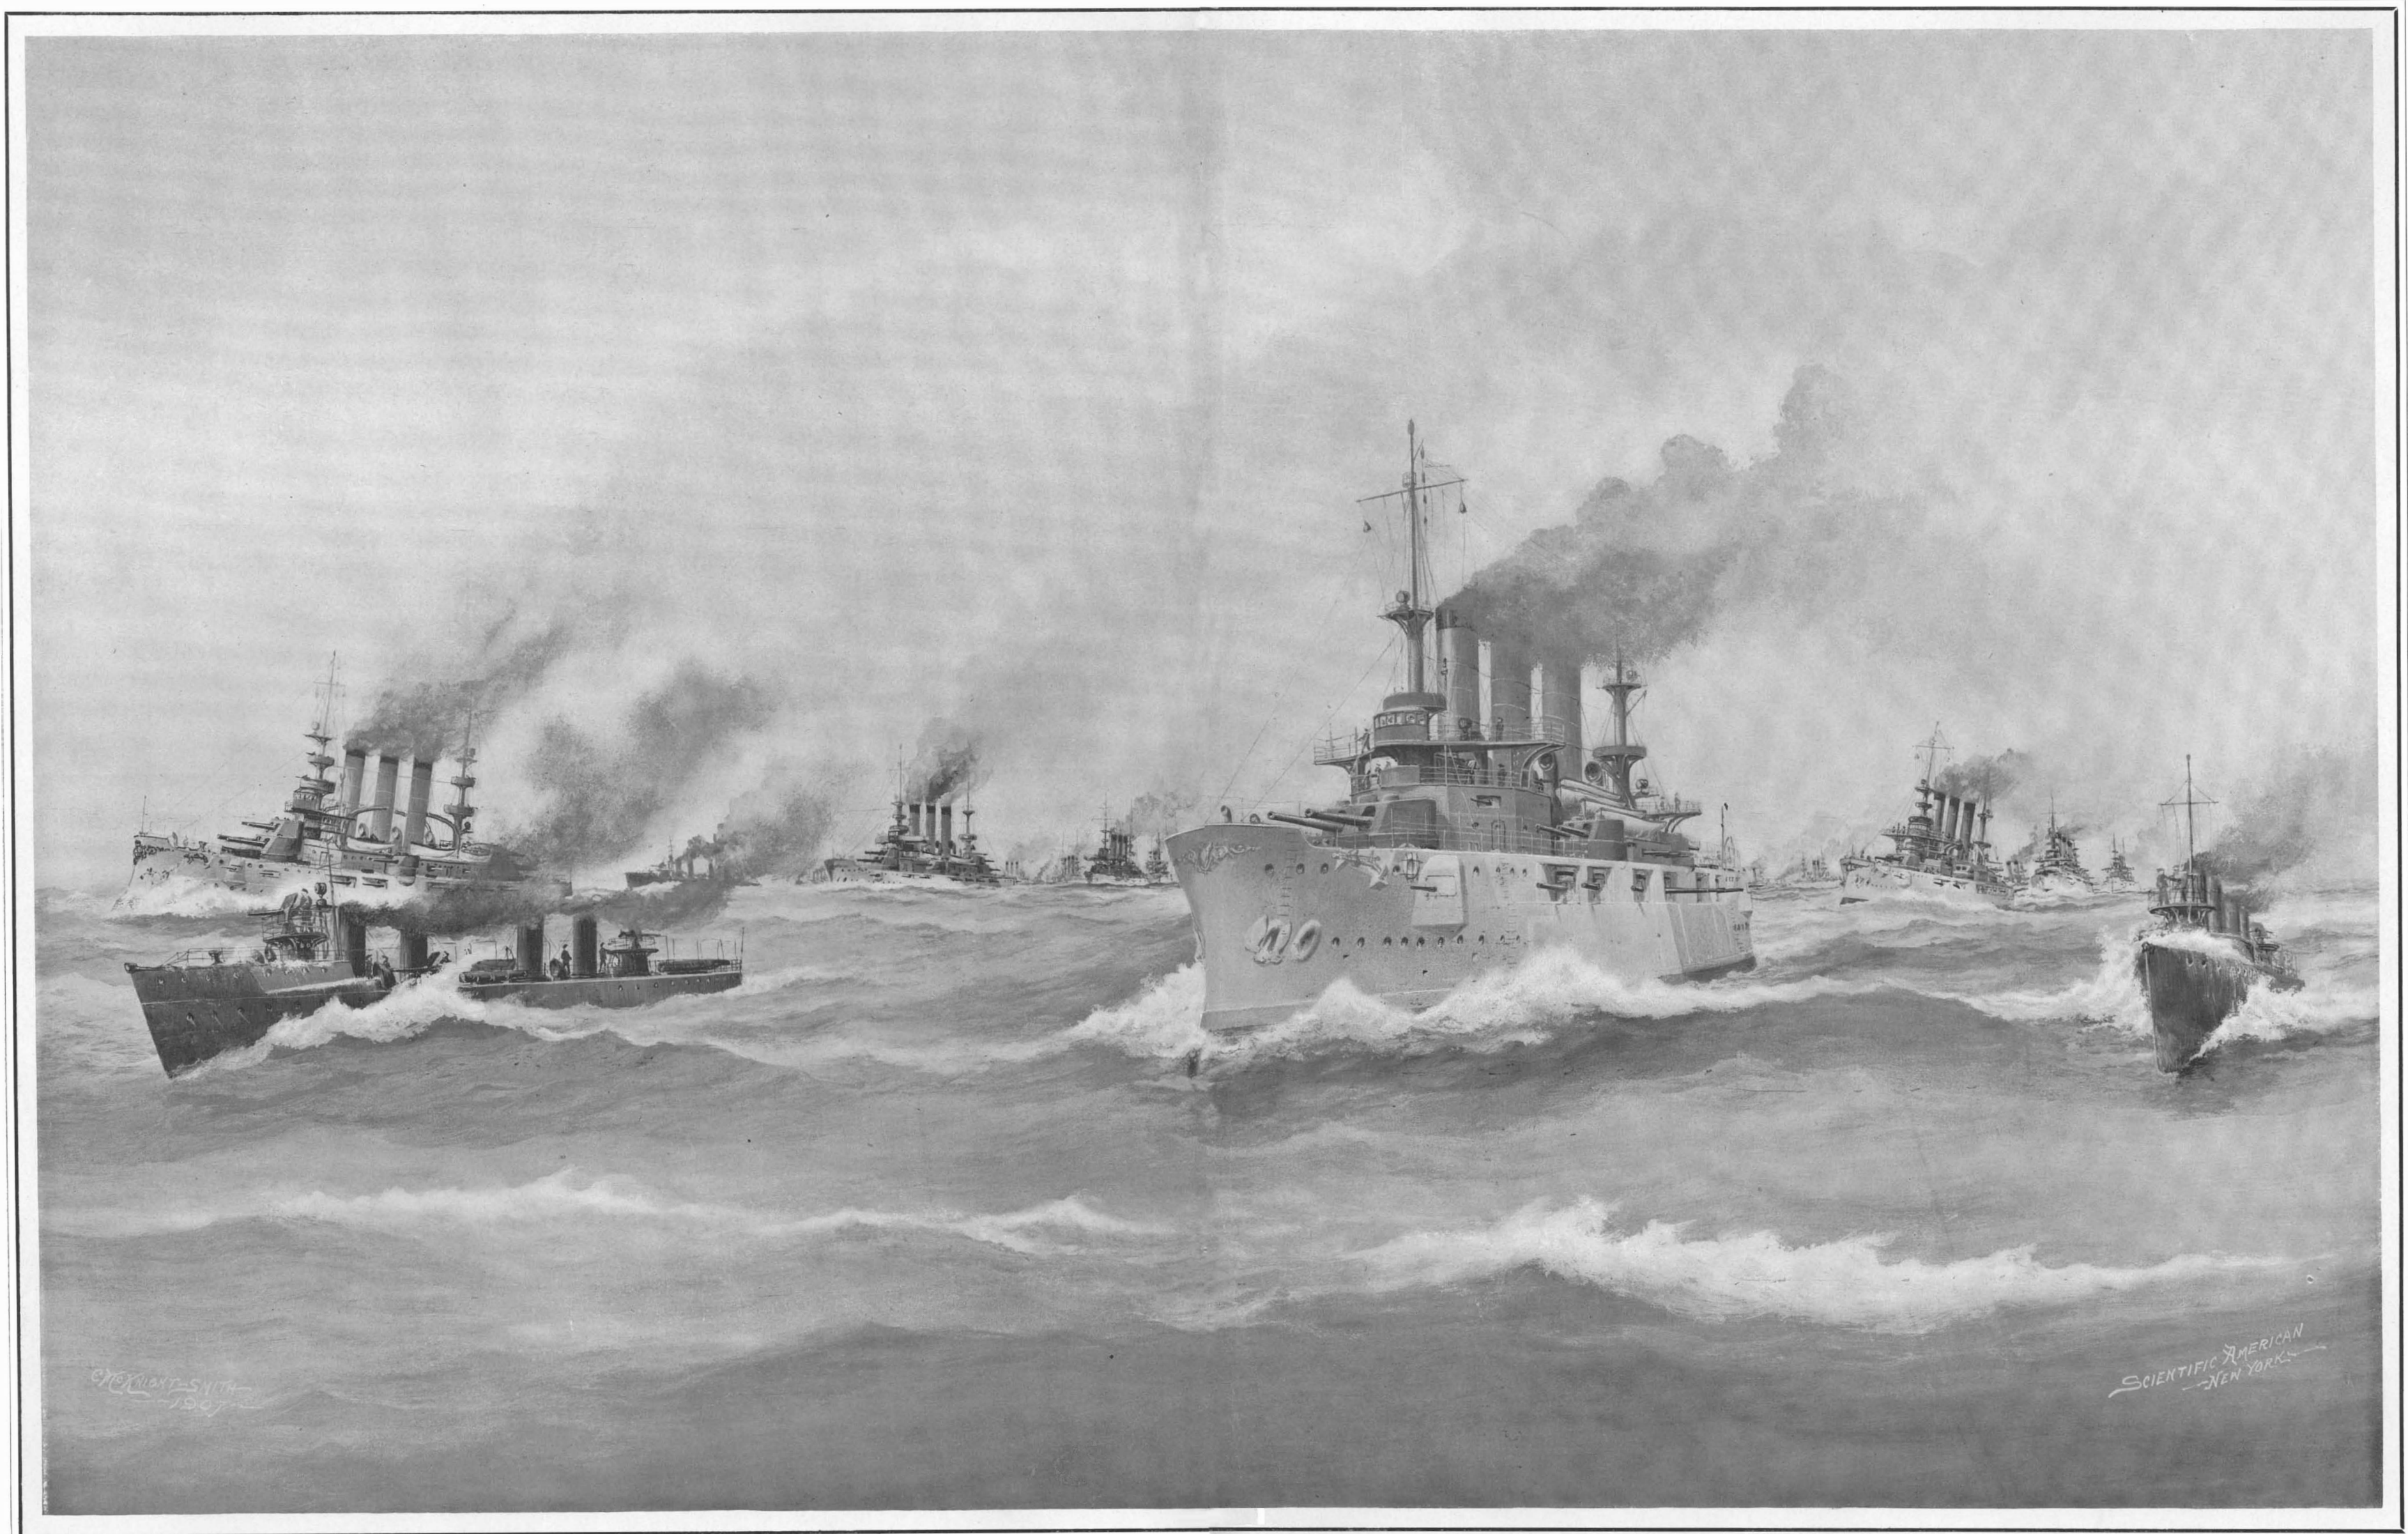

Copyright 1907 by MUNN & CO.

"GEORGIA"
16,094 tons—Speed 19 knots.
Torpedo-boat Destroyer
"STEWART"
420 tons—Speed 29 knots.

Torpedo-boat Destroyer
"HOPKINS"
408 tons—Speed 29 knots.

"VIRGINIA"
16,094 tons—Speed 19 knots.
"MISSOURI"
13,500 tons—Speed 18 knots.

"OHIO"
13,500 tons—Speed 18 knots.
Torpedo-boat Destroyer
"TRUXTON"
433 tons—Speed 30 knots.

"MAINE"
13,500 tons—Speed 18 knots.

"NEW JERSEY"
16,094 tons—Speed 19 knots.
"RHODE ISLAND"
16,094 tons—Speed 19 knots.
"MINNESOTA"
17,650 tons—Speed 18 knots.
Torpedo-boat Destroyer
"LAWRENCE"
400 tons—Speed 30 knots.

"CONNECTICUT"
Flagship
17,770 tons—Speed 18 knots.

"KEARSARGE"
12,320 tons—Speed 16 knots.
"ILLINOIS"
12,150 tons—Speed 16 knots.
Torpedo-boat Destroyer
"WHIPPLE"
433 tons—Speed 30 knots.

"LOUISIANA"
17,770 tons—Speed 18 knots.
"ALABAMA"
12,150 tons—Speed 16 knots.
"KENTUCKY"
12,320 tons—Speed 16 knots.


"KANSAS"
17,650 tons—Speed 18 knots.

Torpedo-boat Destroyer
"HULL"
478 tons—Speed 29 knots.
"VERMONT"
17,650 tons—Speed 18 knots.

THE TRUE SIGNIFICANCE OF THE PACIFIC CRUISE.—THE DEPARTURE OF THE BATTLESHIP SQUADRON.

SEE ARTICLE BY CAPTAIN A. T. MAHAN, PAGE 407.

Fay & Bowen Motor Boats



A 1908 WINNER

The Fay & Bowen 25-foot "Special" shown above is the handsomest thing in its class for 1908. Copper-riveted, all woodwork counterbored and plugged, entire top and interior finished in mahogany.


Fitted with a Fay & Bowen 7 H. P. double cylinder engine it develops a speed of 10 miles an hour, and it *actually makes it*, over a measured course. Steering wheel both at bow and at side. Engine speed controlled both forward or aft of engine.

Photographs and blue prints sent on application.

Fay & Bowen engines are reliable, simple and not sensitive. The Chicago-Mackinac endurance race for 1907 was won by our engine.

If you want a motor boat or marine engine you owe it to yourself to write for our free catalogue.

FAY & BOWEN ENGINE CO.
80 Lake St., Geneva, N. Y.

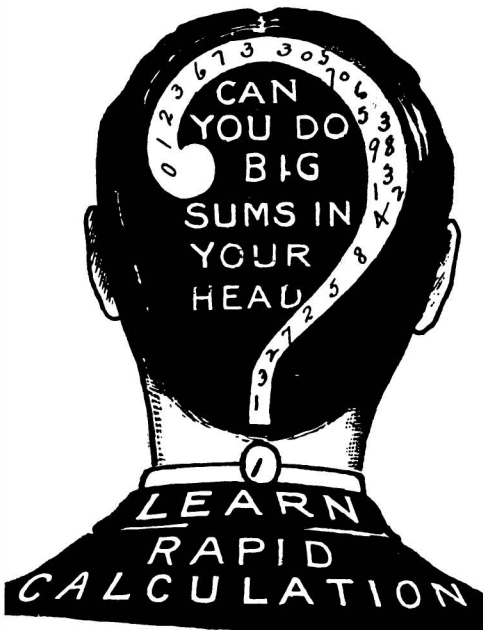

Young Man, Are You Quick at Figures?

This is one of the questions the prospective employer will ask you.

Haven't you heard in your own experience something like the following—"Give Mr. So and So a show—he's the best man in the office," or "Send for Jones"—"he is good at figures."


What is such a reputation worth to you when a valuable vacancy occurs in the store, shop or office?

Don't put off another hour to write for our **Free Book**, "Rapid Calculation." Every day's start may mean dollars; you don't put off eating until you starve; don't put off writing until all the ambition and hope are starved out of you. Address

COMMERCIAL CORRESPONDENCE SCHOOLS
890H Court Bldg., Rochester, N. Y.
"THE SCHOOL OF PROSPEROUS GRADUATES."

VENTRILOQUISM

Learned by any Man or Boy at home. Small cost. Send to-day 2-cent stamp for particulars and proof.
O. A. Smith, Room 536, 2040 Knoxville Ave., Peoria, Ill.

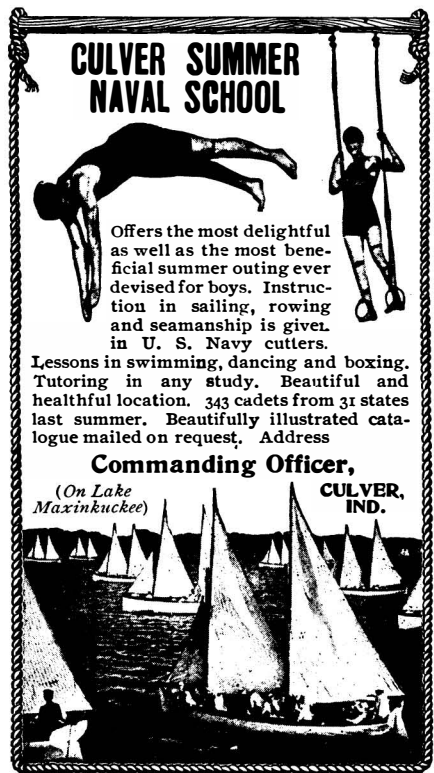

CULVER SUMMER NAVAL SCHOOL

Offers the most delightful as well as the most beneficial summer outing ever devised for boys. Instruction in sailing, rowing and seamanship is given in U. S. Navy cutters.

Lessons in swimming, dancing and boxing. Tutoring in any study. Beautiful and healthful location. 343 cadets from 31 states last summer. Beautifully illustrated catalogue mailed on request. Address

Commanding Officer,

(On Lake Maxinkuckee)

CULVER, IND.


Regal

Four Cycle Marine Engines

Guaranteed steady and reliable under all weather conditions.

Jump Spark Ignition, Auto Type.

Built from 3 H. P. single cyl. to 20 H. P. four cyl. in High Speed Engines.



BUILT TO RUN AND THEY DO IT

Our **Heavy Duty Slow Speed Engines**, 7 H. P. single cyl., 14 H. P. double cyl., 28 H. P. four cyl., 45 H. P. four cyl., are guaranteed to develop their H. P. rating at **slow speed**.

Send for Catalog No. 30. Free. Write to-day,
REGAL GASOLINE ENGINE CO.
62 W. Pearl St., Coldwater, Mich.

We'll Send You This Velvac Razor Strop for 30 DAYS FREE TEST

With this strop you can always keep your razor edge in perfect shaving "shape."

This strop is made on a new and scientific principle.

The leather is all smooth-and-even-fibered, fine-grained colt-skin.

The sharpening side is treated by our special oil-filling process—which also closes the pores—and prepares the surface so that drawing the razor over it forms a vacuum or spongelike.

This vacuum holds the razor-blade close to the surface, and produces an exceedingly keen, sharp cutting edge.

Then a few strokes on the velvet-like surface of the finish side of the strop puts your razor in condition to remove the toughest and wiriest beard without a bit of pulling or scratching.

The velvet-finisher and the vacuum sharpener give us the nanometer and the vacuum sharpener.

Now, we don't ask you to take this razor just on our "say-so."

We want you to prove-it-out to your own satisfaction.

We'll send you a Velvac Razor Strop postage prepaid, upon receipt of price.


You can use it 30 days—then if you don't find it just as we say—send it back and we will refund your money without a word.

Velvac Razor Stropps are made in two sizes—2x3, \$1.55, and 2x4x3, \$1.50. Write to-day for free booklet, "Hints on Easy Shaving."

SEALSKIN SWATY STROP CO.
168 West 2d Street, Ottumwa, Iowa

Valuable Books Home Mechanics for Amateurs

This book has achieved an unparalleled success in one week, and a Special Edition of 4,000 copies has been ordered. It is by far the largest and best book on the subject ever offered at such a low price. It tells how to make things the right way—the "only" way—at small expense. It will prove of value to you—much more than you realize. Do things with your hands. Send for a circular giving contents—the circulars cost only a cent—the book \$1.50 postpaid. If the book could meet you face to face you would be the first to purchase. The first large edition is almost gone, order to-day.



370 Pages 326 Engravings Price \$1.50
REVISED and ENLARGED EDITION

The Scientific American Cyclopedia Of Receipts Notes and Queries.

15,000 Receipts. 734 Pages.
Price, \$5.00 in Cloth. \$6.00 in Sheep. \$6.50 in Half Morocco. Post Free.

This work has been revised and enlarged,
900 New Formulas.


The work is so arranged as to be of use not only to the specialist, but to the general reader. It should have a place in every home and workshop. A circular containing full Table of Contents will be sent on application. Those who already have the Cyclopedia may obtain the

1901 APPENDIX.
Price, bound in cloth, \$1.00 postpaid.

MAGIC Stage Illusions and Scientific Diversions, including Trick Photography

This work appeals to old and young alike, and it is one of the most attractive holiday books of the year. The illusions are illustrated by the highest class of engravings, and the exposures of the tricks are, in many cases, furnished by the prestidigitators themselves. Conjuring, large stage illusions, fire-eating, a word-swallowing, ventriloquism, mental magic, ancient magic, automata, curious toys, stage effects, photographic tricks and the projection of moving photographs are all well described and illustrated, making a handsome volume. It is tastefully printed and bound. Acknowledged by the profession to be the **Standard Work on Magic.**

By A. A. HOPKINS. 568 pages. 420 illus. Price \$2.50.
MUNN & CO., Publishers, 361 Broadway, NEW YORK



ELECTRICITY

is the most wonderful power of the present day. Master it, and you have mastered the best-paying calling of this "live-wire" century.

We teach Electricity practically in our seven-story school building, the most completely and expensively equipped of its kind in the world. Booklet "K" **FREE**. Write for it **TO-DAY**. Eighty pages that are richly illustrated and deeply interesting.

NEW YORK ELECTRICAL TRADE SCHOOL, 39 W. 17th St.

Address Envelopes

with a simple machine,

3,000 per Hour. 3c. per Thousand
Fac-simile of Typewriting


like business correspondence.

Also addresses tags, statements, invoices, bills of lading, notices, receipts, record blanks of any kind—anything—everything.

30,000 Addressographs in Use

Write to-day for indestructible printing plates and catalog.

ADDRESSOGRAPH CO., 232 W. VAN BUREN ST., CHICAGO



Use Beaver Boards Instead of Both Lath and Plaster

Sold all over the United States and at export on merit that wins repeat orders.
POSITIVELY THE IDEAL WALL AND CEILING MATERIAL



Otewego Design, Exterior.

We build Portable Houses any design to order.

Made from pure wood fibre pressed into solid panels—Nail direct to studding, doing away with lath, plaster and wallpaper—Take any tint or color, giving exquisite artistic effects—Insulate and deaden sound—Make buildings warm in winter, cool in summer. Investigate before building. Finish off your third floor or cottage and be convinced. They speed construction and save money.

Six Kinds:
Beaver Finished Wall Boards
Beaver Indurated Boards
Beaver Coated Siding
Beaver Fire-Proof Boards
Beaver Veneered Panels
Beaver Feldspar Siding

Our handsome illustrated Beaver Booklet tells all about them; free with sample for the asking.

The Beaver Manufacturing Co., General Offices, 258 Perry St., Buffalo, N. Y.



Otewego Design, Interior.

Attractive and Substantial. Write for information on Beaver Portable Houses.

WEBB FLEXIBLE SHAFTS

Can be tied in a knot and still give efficient service. They are unequalled for flexibility, strength, and durability, have no back-lash and do not heat up. Supplied in any lengths desired, and in sizes from 1/8 inch to 3/4 inch.

Buffing and grinding attachments and wire belting also a specialty. Prices, etc., on request.

WEBB MANUFACTURING CO., - - Newark, N. J.



WATERMAN CANOE MOTOR

Small, neat, complete. Standard type, 2 H. P. Weight 35 pounds. Drive a canoe 10 to 12 miles an hour. Gray iron cylinder. Spin copper jacket. Aluminum crank case. Float-feed Carburetor. Shipped complete, including foundation. Ready to put in canoe. Immediate delivery. Send for catalog.

WATERMAN MARINE MOTOR CO.
1509 West Fort St., Detroit, Mich., U. S. A.

At Christmas Time

be especially careful to guard against inferior articles and substitutes. To get the best, all-around revolver, simply ask for the

IVER JOHNSON Safety Automatic Revolver

And to be sure that it IS a genuine Iver Johnson, look for the Owl's Head on the grip.

The Iver Johnson is the only revolver that is worthy of the name "Safety." It simply can't go off until the trigger is deliberately pulled all the way back. It can be safely dropped, thrown against a wall, or you can Hammer the Hammer.

It won't go off. When you pull the trigger, it shoots straight and hits hard.

Our Free Book, "Shots," tells in detail why the Iver Johnson is the best revolver for the pocket, the desk and all-around use. Handsome in design and perfect in construction. Our catalogue, also free, shows all the mechanical details.

Iver Johnson Safety Hammer Revolver
Richly nickel-plated, 3-in. barrel, 28 rim-fire, 32 center-fire, or 3 1/4 in. 38 center-fire cartridge. **\$6**

Iver Johnson Safety Hammerless Revolver
Richly nickel-plated, 3-in. barrel, 32 center-fire, or 3 1/4 in. 38 center-fire cartridge. **\$7**

Sold by Hardware and Sporting Goods dealers everywhere, or sent prepaid on receipt of price if dealer will not supply. Look for the owl's head on the grip and our name on the barrel.

IVER JOHNSON'S ARMS AND CYCLE WORKS, 170 River Street, FITCHBURG, MASS.
New York: 40 Chambers Street.
Pacific Coast: 128 Park Street, Alameda, Cal.
Hamburg, Germany: Pickhuben 4.
London, England: 213 Colman Street, E.C.

Makers of Iver Johnson Single Barrel Shotguns and Iver Johnson Truck Bridge Bicycles.

GUNS AND ARMOR

If the primary function of a warship is to give and take hard knocks, it is not stretching the point too far to say that the greatest development in our navy during the past ten years has been in the matter of guns and armor. In 1897 our navy was in a parlous state in respect of its powder; and, although the guns were serviceable, they were sadly behind the long-range, flat-trajectory, pieces of some of the foreign powers. When war was declared, our ships, with few exceptions, were armed with guns of low velocity and energy, and their magazines were filled with the already out-of-date brown powder. At the battle of Santiago our ships were at times absolutely enveloped in dense billows of the smoke of their own guns; and, in spite of the comparatively close ranges at which the running fight was carried on, the number of hits, as determined by a careful subsequent investigation by our naval officers, was only two out of every hundred shots fired. Since the close of the war, our Naval Bureau of Ordnance has done most creditable work as its share of the general improvement of our navy. It has developed a powder which is giving high velocities, with a relatively small amount of erosion. The bureau early became satisfied that, if erosion was to be kept within reasonable bounds, it was necessary to eliminate the powerful but erosive nitroglycerine, and develop, if possible, an all-nitrocellulose powder. This has been done; and as far as our information goes, there is less trouble with erosion in our naval guns than in those of the foreign powers. The only drawback, and it is one of some consequence, is that a powder chamber considerably larger than that necessary for high-nitroglycerine powder is necessary; and there is a consequent increase in the size of the charge, and a call for greater stowage space in the ammunition rooms. The greater velocity and power of the guns with which our latest ships are armed are due, mainly, to the use of smokeless, slow-burning powder. The advantage of this powder lies in the fact that its slow rate of burning enables it to give off fresh volumes of gas during the whole of the time that the projectile is traveling down the bore. The earliest black powders (and in a less degree the brown powders) were ignited almost instantaneously, and their whole mass converted into a volume of gas at high pressure, whose pressure fell rapidly during the travel of the shot, until, at the time the projectile left the muzzle, it amounted to not more than about a ton and a half to the square inch. In the new guns, the continual formation of gas during the travel of the projectile serves to prevent this rapid fall of pressure so effectually, that, if the projectile is started under a pressure of say 18 tons to the square inch, at the instant of leaving the muzzle it is still under a pressure of as high as 6 to 8 tons to the square inch. The result is seen in the fact that, whereas the velocity of the guns used in the Spanish war was only about 2,000 to 2,100 feet per second, the velocity in our present guns is from 2,700 to 2,800 feet per second. This increased velocity has a double advantage; for since the energy increases as the square of the velocity, there is necessarily a great increase in the striking energy at all ranges; and, secondly, the higher velocity means a lower trajectory or curve of

flight, a wider danger space, and far greater likelihood of hitting the mark. The accompanying table embodies the latest types of guns, with which the majority of the ships of the Pacific fleet are armed; and a comparison of these with the corresponding pieces mounted during the war shows what a great advance has been made.


That the remarkable increase in the fighting power of the ships of the Pacific fleet is due to the improved guns and powder, is well shown in the

Sampson's fleet at Santiago and the battleship "Rhode Island" of the Pacific fleet. The total energy of all guns firing at their maximum rate of speed, with carefully aimed shots, was for the "Oregon" 819,456 foot-tons; whereas the total energy of all guns during the same time on the "Rhode Island" would be 3,927,172. The increase in efficiency of the modern gun is largely due, moreover, to the greatly accelerated rate of fire; and this has been rendered possible by improvements in the mounting of the gun and in the breech mechanism and loading arrangements. One of the most important improvements conducing to rapid fire is the means adopted for enabling the gunner to hold the gun steadily upon the target. In early guns the sights were mounted upon the gun itself, and moved with the gun at every recoil. Now, the sights are mounted upon a sleeve which carries the trunnions, and in this sleeve the gun recoils. The man who traverses and elevates the gun stands on a platform, which is supported from this same sleeve; so that the gunner and his sights, which are of the telescopic kind, are not disturbed by the discharge of the gun, and he is enabled to keep the cross


wires in the eye-piece of the telescopic sight upon the target with great accuracy. Other important improvements are found in the methods of bringing the ammunition up from the hold and loading and firing the guns. The 7-inch guns and all calibers below open the breech with a horizontal lever, one single sweep of which unlocks the threads of the breech plug, withdraws the plug, and swings it clear of the breech. The 8-inch rifle and all calibers above this open the breech with a crank, the plug being too heavy for manipulation by the swinging lever. Undoubtedly the most interesting gun carried in Admiral Evans's fleet is the new 45-caliber piece, which weighs 53 tons and is 46 feet in length. It fires a projectile weighing 870 pounds with a charge of smokeless powder weighing 335 pounds. The projectile leaves the muzzle with a velocity of 2,700 feet per second, and a corresponding muzzle energy of 44,025 foot-tons; or sufficient to lift the "Lusitania" bodily out of the water.

A problem in connection with the designing of big guns which calls for very careful planning and workmanship is the control of the recoil. Newton's well-known law that action and reaction are equal and opposite comes into play when a shell is fired. At the instant that a 12-inch projectile is driven from the muzzle of the gun with an energy of over 44,000 foot-tons, the gun itself is driven in the opposite di-

(Continued on page 424.)

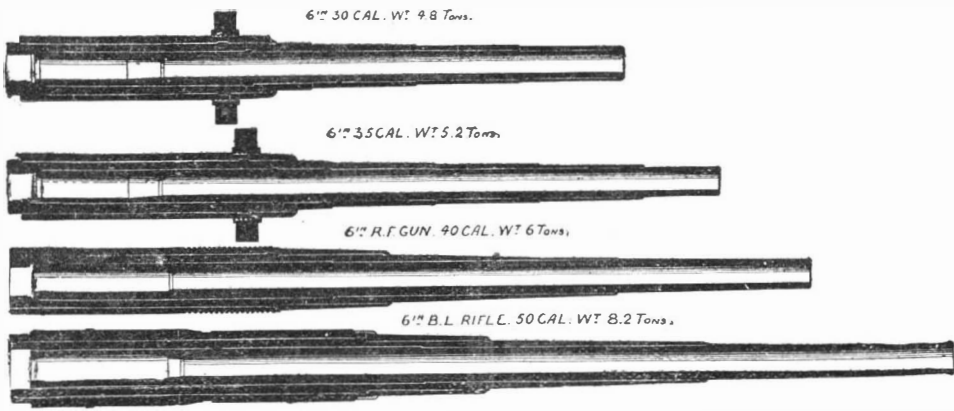


DEVELOPMENT OF 6-INCH GUN, 1883 TO 1901.

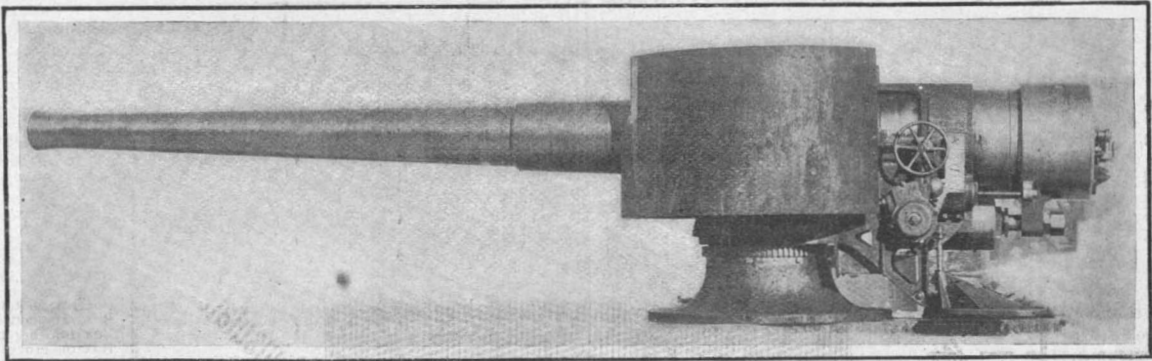

Weight of gun, 12.7 tons. Length, 27 feet. Weight of powder charge, 59 pounds. Weight of projectile, 165 pounds. Muzzle velocity, 2,700 feet per second. Muzzle energy, 8,349 foot-tons. Perforation Krupp armor at 3,000 yards, 6.4 inches.

SEVEN-INCH RAPID-FIRE GUN MOUNTED ON THE SIX BATTLESHIPS OF THE "CONNECTICUT" TYPE.

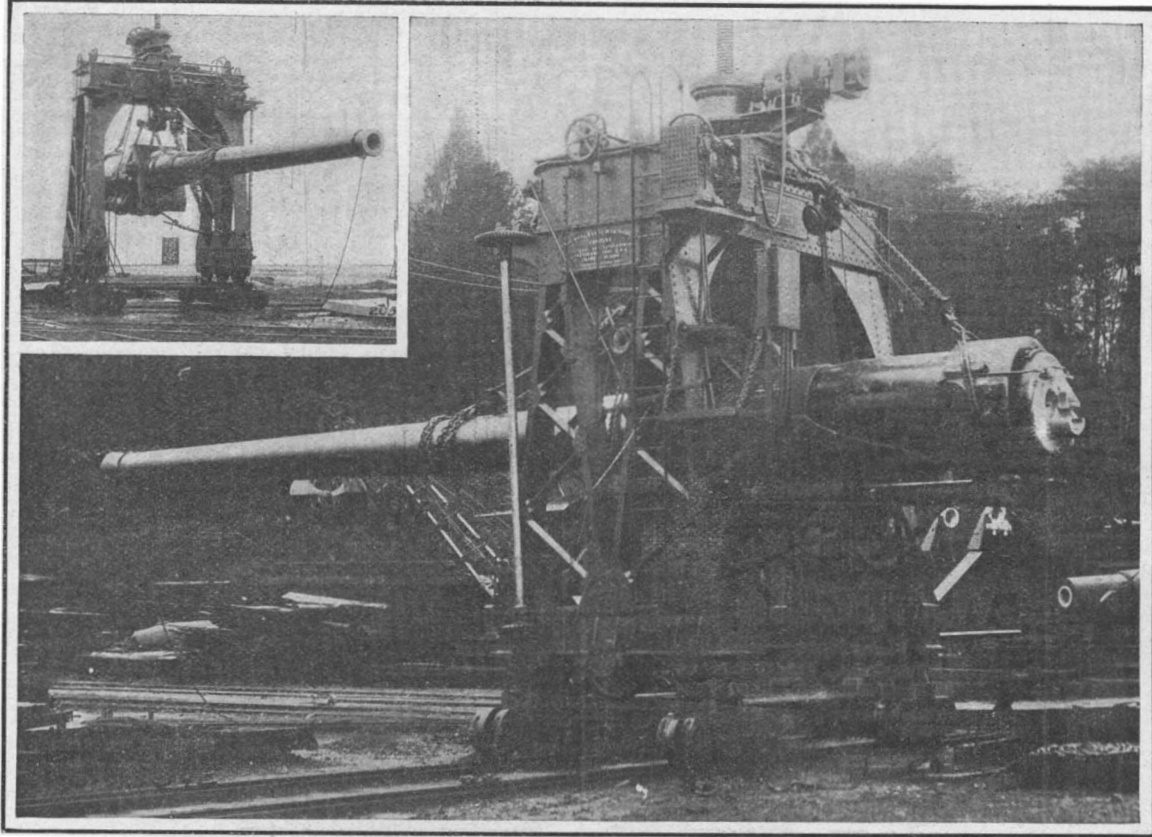


Weight of gun, 53 tons. Length, 46 feet. Weight of powder charge, 335 pounds. Weight of projectile, 870 pounds. Muzzle velocity, 2,700 feet per second. Muzzle energy, 44,025 foot-tons. Perforation Krupp armor at 3,000 yards, 16.3 inches.

THE NEW NAVY 12-INCH GUN ON TRANSFER CRANE AT PROVING GROUND.

accompanying tabular comparison of the total energy of fire in five minutes of the battleship "Oregon" of

rection, backwardly, with exactly the same energy; and

Caliber of Gun.	Weight of Gun and Breech Mechanism, in Tons.	Length in Calibers.	Total Length in Inches	Approximate Charge of Smokeless Powder for Maximum Velocity, Pounds.	Weight of Projectile, Pounds.	Muzzle Velocity, Foot-Seconds.	Muzzle Energy, Foot-Tons.	Perforation at Muzzle, Krupp Armor		Remaining Velocity at 3,000 Yards	Perforation at 3,000 Yards, Krupp Armor.	
								Projectile, Capped.	Projectile, Uncapped.		Projectile, Capped.	Projectile, Uncapped.
3-inch, Mark V	1.0	50	159.35	4	13	2,700	658	3.2	2.8	1,230	1.1	1.0
4-inch, Mark VIII	2.9	50	206.53	12	35	2,800	1,786	5.1	4.5	1,627	2.5	2.2
5-inch, Mark VI	4.8	50	255.65	20	60	2,700	3,036	6.3	5.5	1,692	3.4	2.9
6-inch, Mark VIII	8.6	49	300.23	38	115	2,800	5,714	8.5	7.4	1,923	5.1	4.5
7-inch, Mark II	12.7	45	323.00	59	165	2,700	8,349	9.9	8.6	1,948	6.4	5.5
8-inch, Mark VI	14.7	45	389.00	100	280	2,750	13,647	12.5	10.9	2,06	8.7	7.6
10-inch, Mark II	34.6	40	413.00	205	510	2,700	25,805	16.5	14.3	2,184	12.4	10.8
12-inch, Mark V	62.9	45	553.00	335	870	2,700	44,025	20.8	18.1	2,259	16.3	14.2
13-inch, Mark II	63.2	35	479.10	180	1,180	2,000	31,372	15.8	13.7	1,679	12.5	10.9



HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters or no attention will be paid thereto. This is for our information and not for publication. References to former articles or answers should give date of paper and page or number of question. Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn. Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same. Special Written Information on matters of personal rather than general interest cannot be expected without remuneration. Scientific American Supplements referred to may be had at the office. Price 10 cents each. Books referred to promptly supplied on receipt of price. Minerals sent for examination should be distinctly marked or labeled.


(10637) E. H. S. asks: Kindly advise me if you have a SUPPLEMENT that treats of the different kinds of molecular vibrations known to science. What I mean is this: I have been told that there are known 84 octaves of vibrations; the octave of heat above light, then light, next the photographic spectrum, and next the X-ray. Now, what I want to know is in what order do they come, and the name of each. A. There may be 84 octaves of vibrations. Of that we do not know. Even if there be, not all of the octaves are occupied. The lowest number of vibrations in sound is 16 per second. The ability of the ear to hear ends at about 40,000 vibrations per second. Heat vibrations can be distinguished for some distance below those of light, not above light, as you state. Above the vibrations of light come what are termed ultra-violet vibrations for several octaves. What may be beyond these we cannot certainly say. X-rays are not vibrations in the usual sense of the term. You would be interested in this connection in Duncan's "New Knowledge," price \$2, and in Whetham's "Recent Development of Physical Science," price \$2. We shall be pleased to receive your order for one or both of these or any other books.

(10638) W. J. H. asks: 1. When the ship crosses the line of the equator, does the needle in the mariner's compass deflect and point to the south pole? A. A magnetic needle has two ends: one end is directed toward the north, and the other toward the south pole of the earth. All over the world civilized people use the north end of the compass needle to steer by; the Chinese use the south end. There is no change whatever in the magnetism of a needle upon crossing the equator, nor in its use as a guide to a ship or traveler. It is wholly a matter of usage by which end one shall steer. 2. Is there any difference in the distance that a cannon will send a ball on either the land or the sea? A. Water and land alike have no effect upon the distance a cannon can throw a shot. The pressure of the gas in the gun alone determines the distance the ball will go.

(10639) A. H. G. asks: 1. In the case of electrolysis of water system by overhead trolley car system, is the eating away of pipes where the current enters or leaves the pipe? A. The electrolysis of water pipes and other metal by the return current of the trolley lines takes place where the current leaves the pipes or metals. 2. In modern practice, is it sufficient to have electric welded joints or rails, or should a return wire be provided: if so, should it be overhead or underground? A. If the rails are properly welded, no better provision for the return of the current under ground can be made. No wire is required.

(10640) J. V. G. H. writes: When gathering some wild flowers this morning I found (among an abundance of our common red or lilac thistle) a thistle with pure white blossoms. Will you kindly inform me if this is a common occurrence? Also about the possible explanation for this loss of color, and whether they continue white in coming years, and even would originate a new species? A. The common thistle occasionally has white flowers. We do not know whether this peculiarity could be transmitted by the seeds or not. One would hardly care to propagate thistles even to determine so interesting a question. It is quite common in many plants that white flowers appear in place of those of the usual color. It is also true of animals. This is not considered as the origination of a new species. This variation in the thistle is mentioned in the botanics.


(10641) H. W. J. writes: 1. To what degree of heat has wire glass been tested without yielding in any way? 2. To what degree has it been heated and then played upon by a fire hose without yielding? I have had some very high figures given and would like correct information. A. The claims on behalf of wire glass, as we understand them, are not so much that it does not "yield" (in the sense of cracking) under high temperature whether followed by a stream of cold water or not, but that it remains in place after being cracked, preventing sudden drafts accelerating a fire. We have no conclusive figures covering the tests you describe, but are endeavoring to obtain them and hope to give them later.

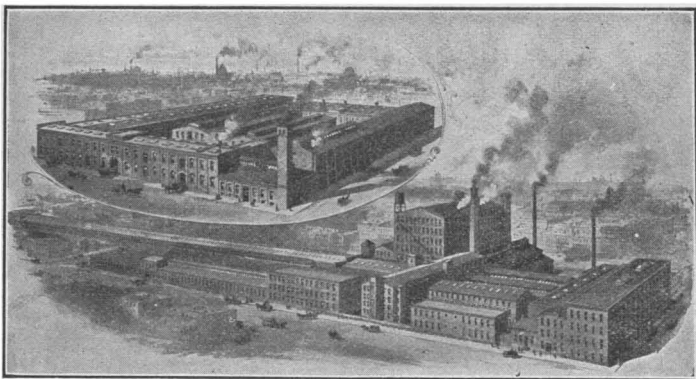

WATERBURY COMPANY

MANUFACTURERS

69 SOUTH STREET, NEW YORK

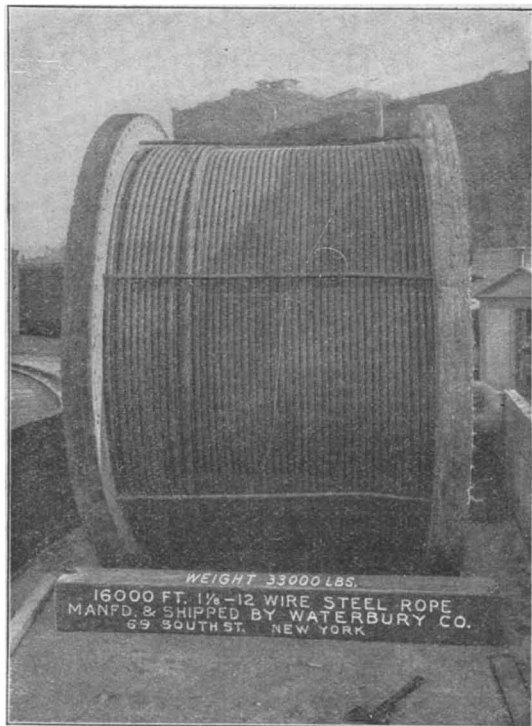

Manila
Sisal
Wire Rope
Music Wire

Lead
Covered
Cables
Rubber
Insulated
Wire

LIFE IN THE NAVY


Would you like a good position paying \$16 to \$70 a month and free living expenses, with a chance to increase your earnings by various allowances—a position that will give you a liberal pension if disabled—a position in which thirty years' service entitles you to retirement on three-quarters pay?

There is an opportunity in the Navy for the young man of good character, sound health and ambition; there is a chance for the man with a knack for mechanics to fit himself for a trade at the naval schools—to prepare himself to earn a good living either in or out of the Navy—an opportunity to develop a sound physical body, to breathe pure fresh sea air, to indulge in various forms of athletics. Anyone who proves himself especially capable may become a warrant officer, and later try for a commission.

Special advantages are offered to men with a trade. If you are a mechanic, an electrician, a stenographer, an accountant, a drug clerk, or a baker or cook, you can enlist at an increased rate of pay at the start, and serve at your trade, taking advantage of the different trade schools—there being no cost for tools or text books, and your pay and living continuing just the same.

If you would like to know all about life in the Navy, send for an illustrated booklet. It tells you about the opportunities offered, all about a department of the government service that is fascinating and attractive for the young man of ability and high aspirations who wants to serve his country while he helps himself—a service in which the opportunities for travel exceed those of any other government position. It also describes fairly the hardships to be endured in the Naval Service. Address

BUREAU OF NAVIGATION, Box 39
Navy Department, Washington, D. C.

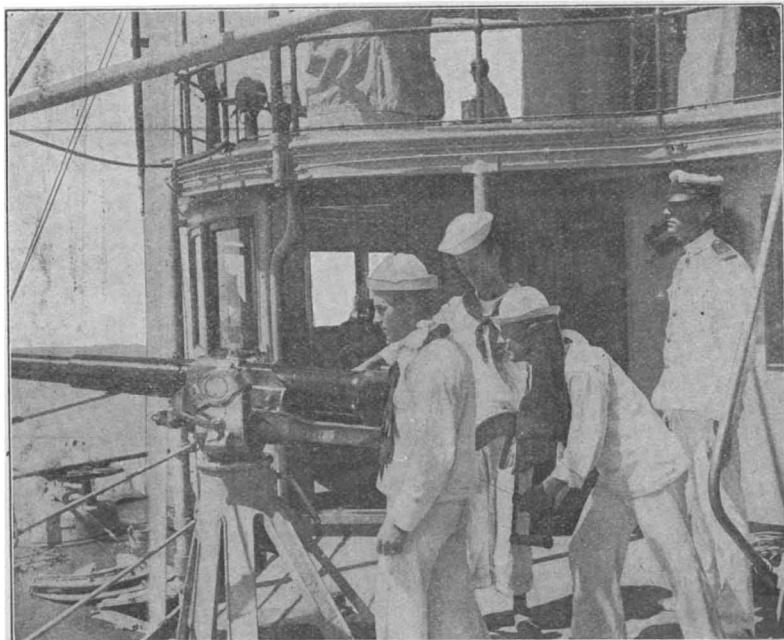

FIRING A 3-POUNDER ON BOARD A BATTLESHIP

INDEX OF INVENTIONS

For which Letters Patent of the United States were issued for the Week Ending November 26, 1907.

AND EACH BEARING THAT DATE [See note at end of list about copies of these patents.]

Acid, obtaining a soluble glutinous substance from tang, E. Hermann.....	872,179
Agricultural implement, L. A. Aspinwall.....	872,316
Air drier, F. T. Stare.....	872,027
Air drier, E. W. Cooke.....	872,064
Amusement apparatus, H. E. Riehl.....	872,253
Amusement device, W. J. Browne.....	871,777
Animal boot, draft, J. J. Fitzgibbon.....	872,060
Animal trap, K. R. Marks.....	871,809
Animal trap, J. W. Gates.....	871,989
Automobile battery support, S. R. Bailey.....	872,213
Automobile body, Thomas & Moore.....	872,031
Automobile chair, A. L. Moss.....	872,247
Awning, canoe, W. B. Sherman.....	872,088
Axle spindle, J. Stickney.....	872,030
Axles, means for taking up wear on vehicle, W. A. Short.....	872,155
Baggage or freight transferring system, B. H. Alvey.....	872,212
Bags, apparatus for packing predetermined quantities in, T. Whitehorn.....	872,161
Bait, artificial, J. G. Henzel.....	871,935
Bale tie, E. H. Vance.....	872,236
Bank, savings, J. L. Kesner.....	871,874
Barrel, hoops, J. C. & C. A. Parker.....	871,817
Barrel pitching equipment, P. Sherrer.....	871,829
Basket, fruit, A. G. Vient.....	872,206
Bearing, ball, P. J. McCullough.....	871,949
Bearing for vault and safe door jambs, adjustable bolt, J. H. Williams.....	871,844
Bearing, trolley wheel, W. M. Caswell.....	871,913
Beater or mixer, Savage & Marchesseault.....	871,895
Bedding roll, G. R. Guild.....	872,122
Beer reclaiming machine, F. C. H. Strasburger.....	871,832
Bells, protective shield for skeleton frame, G. L. Patterson.....	872,145
Belt tightener, E. Mattman.....	871,943
Bicycle and motor bicycle saddle, T. E. Hammaren.....	872,124
Bleaching apparatus, R. Van Buggenhoudt.....	872,205
Bleaching cotton fibers, R. Van Buggenhoudt.....	872,007
Blower, rotary, H. Walther.....	871,837
Boiler washout system, H. J. Clark.....	872,222
Bolster swing damper, W. G. Price.....	872,014
Book holder, C. L. Work.....	871,903
Books, machine for applying binding strips to, W. H. Reisner, et al.....	871,821
Boot and shoe tree or expander, A. H. Powis.....	872,013
Bookjack, W. S. Titus.....	872,005
Bottle cap filling machine, H. A. Olsson.....	872,079
Bottle capping machine, G. Kirkgaard.....	871,998
Bottle, mucilage, R. Walton.....	872,268
Bottle, non-refillable, E. M. Card.....	871,780
Bottle resealing device, J. R. Scott.....	872,153
Bottling machine, J. R. Cobb.....	872,275
Box, Inwood & Lavenberg, reissue.....	12,725
Box making machine, J. P. Payne.....	872,195
Box or crate machine, L. D. Riggs.....	871,957
Brake apparatus, fluid pressure, C. H. Ferguson.....	872,116
Bread mixer, A. Fay.....	871,988
Brick facing, imitation, G. Morgan.....	872,003
Brush, bottle, H. Cooperman.....	871,786
Brush holder, tooth, F. J. Spangler.....	872,091
Bucket, dumping, A. Schroeder.....	872,151
Buckle, I. Blum.....	871,981
Buffing machine, J. E. Leavitt.....	871,942
Buffing machine, G. F. Stewart.....	871,962
Buffing machine, J. Gezenlichter.....	871,990
Buffing machine and disk holder therefor, G. F. Stewart.....	871,964
Building, E. Huff, Jr.....	872,236
Building block, W. L. Dow.....	872,111
Building constructions, apparatus for demonstrating the strains in, E. Carlipp.....	871,861
Bulkhead doors, apparatus for electrically operating water tight, R. H. Kirk.....	871,804
Bullet, J. Piatkowski.....	872,081
Bushing, H. J. Gilbert.....	871,928
Button loop, T. S. Haley.....	872,230
Button, self-attaching, H. O. Rose.....	872,149
Button, separable, M. D. Shipman.....	871,897
Cabinet, grocer's, R. T. Durham.....	872,225
Cable carrier apparatus, G. A. Amsden.....	871,768
Cable terminal and junction box, F. B. Cook.....	871,984
Cables, etc., apparatus for cutting, C. Walser.....	872,312
Cables, strands, and the like, feeding apparatus for, L. A. Holman.....	872,064
Cancering machine, stamp, C. E. Phillips.....	872,010
Car arrester, W. Cook.....	872,276
Car door, F. W. Burwell.....	872,167
Car, dump, W. A. Caswell.....	871,781
Car, dump, C. H. Doty.....	872,057
Car, dumping, A. Becker.....	872,045
Car operating mechanism, dump, A. S. Page.....	871,885
Car sand box, A. L. Bacon.....	872,104
Car underframe, Howard & Westlake.....	871,799
Car underframe, A. Becker.....	872,044
Car ventilating system, F. D. Jacobs.....	871,938
Car wheel tempering and annealing apparatus, J. M. Hansen.....	871,931
Car wheels, tempering and annealing, J. M. Hansen.....	871,932
Carpet stretcher and sizer, F. Schvenson.....	872,087
Carrier and elevator, E. G. Kraft.....	872,136
Case, See Display case.....	
Casket handle, J. H. Walker.....	872,034
Casting reel, free, H. Slotterbeck.....	872,261
Cement block mold, G. B. Blodgett.....	872,106
Centrifugal machines, journal support for, K. K. McLeod.....	872,078
Chain, H. M. Gray.....	871,796
Chain making machine, Coes & Scott.....	871,784
Check system, meal, G. A. Phillips.....	872,011
Cherries, etc., device for picking, J. West.....	871,842
Chuck, self-tightening rock drill, J. A. Thompson, et al.....	871,972
Churning or washing machine, Avery & Bartlett.....	871,906
Cigar bunch forming apparatus, O. Hammarstein.....	872,177
Cigar bunch rolling machine, O. Hammarstein.....	872,125
Cigar moistener, O. L. Johnson.....	872,068
Clamp, M. A. Reare.....	872,252
Clip, L. H. Porter.....	871,888
Clock, alarm, C. G. Trautman.....	871,900
Clock, electric guest calling, R. C. Dick.....	872,224
Clock, tower, E. Rowe.....	872,260
Clothes horse, collapsible, J. Hummel.....	872,235
Clutch, friction, W. J. Hilliard.....	872,062
Coat, hat, and umbrella rack, locking, H. S. Payne.....	872,147
Cock or valve operating means, W. W. Gordon.....	871,869
Cock, stop, R. Rice.....	871,956
Composite structures, reinforcing means for, J. F. Havemeyer.....	872,127
Computing machine, D. W. Shick.....	872,021
Concrete wall or column construction, W. E. Middleton.....	871,879
Contact adjustment, G. L. Patterson.....	872,146
Controller and circuit breaker, combined, W. M. Scott.....	872,154
Cooking apparatus, steam, W. F. Lorenzen.....	872,242
Cooling apparatus, W. Griesser.....	872,175
Cord knoter, R. H. Johns.....	872,182
Corn thinner, C. S. Shunk.....	872,269
Cotter pin, F. E. Hite.....	872,180
Counter, recording, F. L. Wolfe.....	871,849
Cream separator, centrifugal, T. W. Morgan.....	871,882
Cream separators, liner for centrifugal, W. W. Marsh.....	871,878
Crystallizing apparatus, G. Schicht.....	872,257
Cut off, automatic, H. P. Coster.....	872,170
Cyanid of potassium or sodium, manufacture of, F. W. Morris.....	871,948
Cycle, motor, C. O. Hedstrom.....	871,995
Dehydrating animal and vegetable substances, E. W. Cooke.....	871,982
Dehydrating apparatus, F. T. Stare.....	872,026
Dining table, J. A. Schackner.....	872,256

GUNS AND ARMOR.

(Continued from page 422.)

if steps were not taken to control the 53-ton mass it would not stop moving until it had burst its way through the rear walls of the turret and wrought no end of havoc besides. It would be impossible to hold the gun absolutely rigid and prevent its recoil; for the shock would tear asunder any bolts or other fasteners which might be devised; or, if they should hold, it would wrench the fabric of the ship asunder. The recoil is rendered harmless by carefully-designed means for gradually absorbing the recoil; and this is done in the case of the 12-inch gun by hydraulic cylinders, attached to the sleeve or non-recoiling portion thereof. The sleeve and cylinders are shown very clearly in the accompanying photographs of a 12-inch gun at the Indian Head Proving Ground. The huge weapon is shown suspended in a 112-ton gantry crane and transfer car built by the Wellman, Seaver, Morgan Company, to whom we are indebted for our illustration. The action of the recoil cylinders of the gun is as follows: A massive yoke at the rear end of the gun serves as an attachment for the piston rods of the recoil cylinders, which are carried on the sleeve; and the recoil is checked by the escape, from the pressure side to the reverse side of the piston, of the liquid contained in the cylinders. The fluid escapes past the piston by means of grooves cut along the walls of the cylinders, which are wide enough to give a full opening at the beginning of the recoil, but gradually taper and contract in area, until the proper limit of recoil is reached, when the grooves come to a point and cut off any further flow of liquid. Inside each recoil cylinder is a series of spiral springs, which

COMPARISON OF TOTAL ENERGY OF GUNFIRE IN FIVE MINUTES OF BATTLESHIPS "OREGON" (1897) AND "RHODE ISLAND" (1907).*

Oregon in 1897.			Rhode Island in 1907.		
Guns.	Muzzle Energy, Ft.-Tons.	Muzzle Energy in Five Minutes' Firing, Ft.-Tons.	Guns.	Muzzle Energy, Ft.-Tons.	Muzzle Energy in Five Minutes' Firing, Ft.-Tons.
4 13-inch	33,627	269,016	4 12-inch	44,025	726,412
8 8-inch	8,011	320,440	8 8-inch	13,847	1,091,760
4 6-inch	2,990	119,600	12 6-inch	5,714	1,714,300
20 6-pdrs	188	110,400	12 3-inch	658	394,800
Total energy all guns in five minutes.		819,456	Total energy all guns in five minutes....		3,927,172

* The enormous increase in energy is due largely to the greatly increased rapidity of fire, resulting from improved mechanism for handling and maneuvering the guns, and to the greater attention now paid to the training of the gunners. The above totals are calculated upon the number of carefully-aimed shots which each gun could deliver under battle conditions and not upon the extraordinary rapidity which has been obtained by crack gun crews in target practice.

serve to keep the guns from moving, when the ship rolls or the gun is elevated. When recoil takes place, these springs are compressed, and they exert sufficient force to return the guns to the firing position as soon as recoil ceases. The same principle is followed in the guns of smaller caliber, such as the 8, 7, and 6-inch.

The illustration of the 12-inch gun should possess particular interest; for this piece will undoubtedly, for some years to come, constitute the sole armament for long-range fighting of our future battleships, and possibly even of our future cruisers. It must be admitted that, for a gun of 45 calibers length, the velocity of 2,700 feet per second is rather low, and not equal to that obtained by the 45-caliber 12-inch guns of the British and one or two other navies. Originally, these guns were planned for 2,800 feet per second; but it was found that the pressures toward the muzzle were rather greater than the guns could safely stand, and the pressures and velocities were, therefore, reduced. How long the 12-inch gun will continue to be our principal weapon it is hard to determine; but we rather expect to see a return to the 13-inch, with an increase of velocity to not less than 2,800 feet per second. Such a gun is more accurate, that is to say, more accurate shooting could be made with it at the long battle ranges which will obtain in future engagements. Moreover, its trajectory would be flatter, and its danger zone greater; it would maintain its velocity longer, and would reach the mark with 30 to 40 per cent greater hitting power.

On November 27 a train carrying some 200 invited passengers traveled from Manhattan Island to Borough Hall, Brooklyn, under the East River. The Battery tunnel has more than once been delayed in construction, but this journey gives hope that the delays are at an end and that a regular service will operate early in the new year. On the outward trip the distance of 1.6 miles was traversed slowly, to allow time for inspecting the tunnel, but a return journey was made in about five minutes.

TABLE OF VESSELS COMMISSIONED, COMPLETED, BUILDING OR AUTHORIZED SINCE THE SPANISH WAR. BATTLESHIPS, MONITORS, AND ARMORED CRUISERS.

Name.	Type.	Displacement in Tons.	Speed in Knots.	Armor.		Armament.	
				Belt.	Gun Positions.	Main.	Secondary.
Kearsarge.....	Battleship.	11,540	16.8	16½ in.	17 in.—15 in.	4 13-in. B. L. R. 4 8-in. B. L. R. 14 5-in. R. F. G.	20 6-pounders. 8 1" 6 small guns.
Kentucky.....	"	"	16.9	"	"	"	"
Alabama.....	"	11,565	17.1	"	15 in.—14 in.	4 13-in. B. L. R. 14 6-in. R. F. G.	16 6-pounders. 6 1" 6 small guns.
Illinois.....	"	"	17.4	"	"	"	"
Wisconsin.....	"	"	17.2	"	"	"	"
Maine.....	"	12,300	18.0	11 in.	12 in.—12 in.	4 12-in. B. L. R. 16 6-in. R. F. G. 6 3-in. R. F. G.	8 6-pounders. 6 1" 4 small guns.
Missouri.....	"	"	"	"	"	"	"
Ohio.....	"	"	"	"	"	"	"
Georgia.....	"	14,948	19.0	"	11 in.—10 in.	4 12-in. B. L. R. 8 8-in. B. L. R. 12 6-in. R. F. G. 12 3-in. R. F. G.	12 3-pounders. 8 1" 10 small guns.
Nebraska.....	"	"	"	"	"	"	"
New Jersey.....	"	"	"	"	"	"	"
Rhode Island.....	"	"	"	"	"	"	"
Virginia.....	"	"	"	"	"	"	"
Connecticut.....	"	16,000	18.0	"	12 in.	4 12-in. B. L. R. 8 8-in. B. L. R. 12 7-in. R. F. G. 20 3-in. R. F. G.	12 3-pounders. 8 1" 10 small guns.
Louisiana.....	"	"	"	"	"	"	"
Kansas.....	"	"	"	9 in.	"	"	"
Minnesota.....	"	"	"	"	"	"	"
New Hampshire.....	"	"	"	"	"	"	"
Vermont.....	"	"	"	"	"	"	"
South Carolina.....	"	"	18.5	11 in.	"	8 12-in. 20 3-in.	—
Michigan.....	"	"	"	"	"	"	"
Delaware.....	"	20,000	21.0	"	"	10 12-in. 14 5-in.	—
North Dakota.....	"	"	"	"	"	"	"
Arkansas.....	Monitor.	3,235	11.5	"	11 in.—10 in.	2 12-in. B. L. R. 4 4-in. R. F. G.	3 6-pounders. 6 1" 2 Colts.
Florida.....	"	"	"	"	"	"	"
Nevada.....	"	"	"	"	"	"	"
Wyoming.....	"	"	"	"	"	"	"
California.....	Armored Cruiser.	13,680	22.0	6 in.—5 in.	6½ in.—6 in.	4 8-in. B. L. R. 14 6-in. R. F. G. 18 3-in. R. F. G.	12 3-pounders. 8 1" 10 small guns.
Colorado.....	"	"	"	"	"	"	"
Maryland.....	"	"	"	"	"	"	"
Pennsylvania.....	"	"	"	"	"	"	"
South Dakota.....	"	"	"	"	"	"	"
West Virginia.....	"	"	"	"	"	"	"
Washington.....	"	14,500	"	5 in.	10 in.—10 in.	4 10-in. B. L. R. 16 6-in. R. F. G. 22 3-in. R. F. G.	12 3-pounders. 2 1" 10 small guns.
Tennessee.....	"	"	"	"	"	"	"
Montana.....	"	"	"	"	"	"	"
North Carolina.....	"	"	"	"	"	"	"
Charleston.....	Semi-armored Cruiser.	9,700	"	4 in.	Deck 3 in.—2 in.	14 6-in. R. F. G. 18 3-in. R. F. G.	12 3-pounders. 24 small gun.
Milwaukee.....	"	"	"	"	"	"	"
St. Louis.....	"	"	"	"	"	"	"

UNARMORED CRUISERS AND GUNBOATS.

Name.	Type.	Displacement in Tons.	Speed in Knots.	Protective Deck.		Armament.	
				Slopes.	Flat.	Main.	Secondary.
Salem.....	Cruiser Scout.	3,750	24	"	"	12 3-in. R. F. G.	"
Chester.....	"	"	"	"	"	"	"
Birmingham.....	"	"	"	"	"	"	"
Chattanooga.....	Semi-protected Cruiser.	3,200	16.5	2 in.—1 in.	½ inch.	10 5-in. R. F. G.	8 6-pounders. 6 small guns.
Cleveland.....	"	"	"	"	"	"	"
Denver.....	"	"	"	"	"	"	"
Des Moines.....	"	"	"	"	"	"	"
Galveston.....	"	"	"	"	"	"	"
Tacoma.....	"	"	"	"	"	"	"
Reina Mercedes.....	Unprotected Cruiser.	3,090	17.0	"	"	"	"
Don Juan de Austria.....	Gunboat.	1,130	14.0	"	"	4 5-in. R. F. G.	4 6-pounders. 4 Colts.
General Alava.....	"	1,390	10.5	"	"	"	6 Nordenfelts. 4 6-pounders.
Isla de Cuba.....	"	1,125	14.0	2½ in.	1½ inches.	4 4-in. R. F. G.	4 Colts. 4 6-pounders.
Isla de Luzon.....	"	"	"	"	"	"	4 Colts. 2 3-pounders.
*Alvarado.....	"	106	19.0	"	"	"	2 Colts.
Gunboat No. 16.....	"	"	"	"	"	"	"

* Twenty-one of this type of Gunboat captured or purchased from Spain, varying from 42 to 500 tons displacement and from 8 to 19 knots speed.

DESTROYERS, TORPEDO BOATS, AND SUBMARINES.

Name.	Type.	Displacement in Tons.	Speed in Knots.	Armament.	
				Torpedo Tubes.	Guns.
Bainbridge.....	Torpedo-boat Destroyers.	420	29.0	2 18-inch Whitehead.	2 3-inch and 5 6-pounders R. F. G.
Barry.....					
Chauncey.....					
Dale.....					
Decatur.....					
Paul Jones.....	Torpedo-boat Destroyers.	402	30.0	2 18-inch Whitehead.	2 3-inch and 5 6-pounders R. F. G.
Perry.....					
Preble.....					
Stewart.....					
Lawrence.....					
Macdonough.....	Torpedo-boat Destroyers.	433	30.0	2 18-inch Whitehead.	2 3-inch and 5 6-pounders R. F. G.
Truxton.....					
Whipple.....					
Worden.....					
Hopkins.....					
Hull.....	Torpedo-boat Destroyers.	408	29.0	2 18-inch Whitehead.	2 3-inch and 5 6-pounders R. F. G.
Bagley.....					
Bailey.....					
Barney.....					
Biddle.....					
Blakely.....	Torpedo-boat.	175	29.2	3 18-inch Whitehead.	3 3-pounders R. F. 4 6-pounders R. F. 3 3-pounders R. F.
Davis.....					
Dahlgren.....					
De Long.....					
Farragut.....					
Fox.....	Torpedo-boat.	154	23.1	3 " "	3 1-pounders R. F. 4 1-pounders R. F. 3 3-pounders R. F.
Goldsborough.....					
MacKenzie.....					
Nicholson.....					
O'Brien.....					
Rowan.....	Torpedo-boat.	200	25.0	3 " "	4 1-pounders R. F. 3 3-pounders R. F. 3 3-pounders R. F.
Shubrick.....					
Stockton.....					
Stringham.....					
T. A. M. Craven.....					
Thornton.....	Torpedo-boat.	200	26.0	3 " "	7 6-pounders R. F. 4 1-pounders R. F. 3 3-pounders R. F.
Tingey.....					
Wilkes.....					
Holland.....					
Adder.....					
Grampus.....	Submarine.	122½	8½—7½	1 Torpedo Tube.	"
Moccasin.....					
Pike.....					
Shark.....					
Porpoise.....					
Plunger.....	Torpedo-boat.	175	10—9	"	"
Cuttlefish.....					
Tarantula.....					
Viper.....					
Octopus.....					

Williams' Shaving Stick

"The only kind that won't smart or dry on the face"

Williams' Shaving Soap was adopted as Standard by the United States Naval department nearly 50 years ago. The distinguishing features of the soap that recommended it to the United States Navy at that time are the same wholesome and exceedingly important qualities that make it to-day the preference of the Army, Navy, and civilians everywhere.

First: Its lather is rich, creamy and profuse.

Second: Its lather does not dry on the face, but lasts to the end of the shave.

Third: It does not smart the skin, but softens the beard and soothes the irritated face.

Notice these three points when you use Williams' Shaving Stick and you will understand its universal popularity.

The Hinged Cover Nickeled Box is a striking feature of Williams' Shaving Stick. It saves time—the cover cannot get lost—can be opened or closed with one hand and the box keeps the soap in perfect condition in any climate. The box is very strong and will stand lots of hard usage.

Sent by mail on receipt of price, 25 cents, 1 Shilling, 1 Franc, or 1 Mark, if your druggist fails to supply you. Sample size mailed for 4 cents in stamps.

Address: The J. B. Williams Co.

GLASTONBURY, CONN., U. S. A.

LONDON: 65 Great Russell St., W. C.

PARIS: 4 Rue Chauveau Lagard

BASEL: Nadolny & Co.

The New
Nickeled Box
Hinged Cover



Discharge tank or reservoir, intermittent, C. Potts	871,820
Display case, A. E. Lyons	871,877
Display case, market box, Johnson & Larkin	871,802
Display stand, B. Brooks	872,274
Display stand for bats, C. E. Mentzer	872,130
Door and cupboard catch, S. C. Schofield	872,309
Door check or bumper, H. F. Keil	872,184
Door fastener and opener, C. Smith	872,022
Door holder, A. J. Rosentreter	871,959
Door lock, sliding, W. M. Cook	872,110
Dough machine feeding device, P. F. Carroll	872,051
Draft equalizer, A. Lange	872,240
Drafting machine, design, A. Lorant	871,808
Drawers, shield for ladies, I. I. Elterich	872,172
Drop mechanism, quick, J. W. Little	872,071
Dye and making same, green vat, G. Engi	872,227
Dye, brown vat, A. Schmidt	872,085
Dye, green black vat, A. Schmidt	872,086
Dyestuff and making same, F. J. Oakes	872,250
Earth drill, G. C. Jackson	871,800
Easel and hanger, C. G. Taylor	871,833
Educational chart, drawing board, and writing desk, combined, G. A. Henderson	871,934
Effluents, apparatus for treating trade, B. & A. Broadbent	872,049
Electric apparatus, sealing for, J. R. Baker	871,772
Electric furnace, E. R. Taylor	871,971
Electric switch, automatic, W. L. Bliss	872,215
Electrocapillary apparatus, A. Orling	872,193
Electrotherapeutic apparatus, Raymond & Vetter	872,148
Elevator floor gate actuating device, W. C. Smith	871,898
Embroidering machine, J. Schroeder	872,152
Engine burner, explosion, P. McCusker	871,883
Engine cylinder, H. Richter	872,306
Engine turn table casting, locomotive, W. H. Wright	871,850
Engines, automatic alarm and stopping device for, D. B. Adams	872,039
Engines, cooling system for internal combustion, G. Green	871,797
Engines, electric stop for, J. K. Wright	872,102
Excavating for concrete piles, etc., W. J. Stewart	872,093
Excavator, W. Watson	871,830
Eyeglass mounting, L. F. Adt	872,211
Eyelet, W. Hughes	872,237
Fabric, See Knitted fabric	
Fane indicator, cab, C. Mascart	872,188
Fastener, A. U. Bright	872,221
Feed rack, feed trough, and animal pen, combined, W. J. Tolle	872,032
Feed water distributing pan mechanism, J. M. Lynch	872,299
Feed water heater, J. W. Jantzen	871,801
Filter press, F. W. von Oven	872,008
Filtration plant, gravity, J. G. MacGregor	872,073
Fire apparatus, J. H. Mitchell	871,880
Fire escape, P. C. Burhaus	872,050
Firearm sight, J. E. Harker	871,933
Flax breaker feeding mechanism, G. H. Ellis	871,863
Flue cleaner, chimney, W. H. Perry	872,080
Flying machine air propeller, L. Gathmann	871,926
Furnace, O. Beguelli	871,854
Fuse, F. Young	871,851
Garbage receptacle, A. Rees	871,955
Garment hanger, M. A. Wood	872,100
Garment holder, H. C. Krause	872,297
Gas and gasoline engine, E. E. Wright	872,104
Gas burner, W. Kitching	872,134
Gas burner, inverted, J. Lederer	872,070
Gas pipe safety device, I. L. Cleveland	871,783
Gas plant, G. L. Morton	871,810
Gas pressure regulator, A. D. Branson	872,273
Gate, A. D. Keers	872,005
Gear, transmission, A. P. Boyer	872,220
Gear, variable speed and reversing transmission, A. P. Boyer	872,219
Gearing, O. Williams	872,269
Gearing, change speed, C. Johnson	872,131
Glass working apparatus, R. M. Paxton	872,194
Glove, D. E. Laferly	872,137
Glove, husking, S. Kvam	871,805
Gopher trap, G. Armstrong et al.	872,041
Grading machine, G. S. Whitney	871,976
Grain cleaning and pickling machine, H. T. Holgeon	872,130
Grain drill, Armitage & Thistlethwaite	871,770
Grass cutting implement, J. G. Leep	871,806
Grave construction, W. Livingston	872,241
Grinding machine, E. Cook	871,785
Hair spring locator, B. Z. Friedman	871,866
Halter, S. E. Gates	872,027
Hammer, automatic magazine, J. E. Ridings	872,150
Harmonica, M. J. Reidy	872,083
Harness, E. Morrey	872,245
Harrow riding attachment, D. K. Wilson	871,846
Harvester, G. P. Wack	871,835
Harvesting and husking machine, corn, E. A. Hollenbeck	872,285
Harvesting machine, potato, R. S. Baxter	872,169
Hat, coat, and umbrella rack, E. Boynton	872,107
Hay rake, C. Pearson	872,009
Hinge, W. H. Torode	872,263
Horse overshoe, G. N. Kinnell	872,287
Horse power, G. Weizelmann	871,840
Horseshoe, F. M. Bethune	872,214
Horseshoe, hoof spreading, A. Nagley	872,191
Hose coupling, J. G. Masse	872,001
Hot water heater, J. Geddes, Jr.	871,927
Hydraulic transmission device, V. C. Shank	872,203
Hydrocarbon burner, H. P. Glazier	871,992
Hydrosulfite preparation and making same, stable, G. Engl	872,114
Ice cutting machine, H. Wulff	871,978
Illusory apparatus, B. Purpur	872,305
Incubator, S. F. Bihn	871,908
Indexing device, drawer contents, Barrow & King	872,042
Indigo and making same mixed chlorobromo derivatives of, G. Engl	872,115
Indigo and making same, monochloromonomobromo derivatives of, G. Engl	872,280
Insole, H. H. Rossa	871,891
Insole slashing machine, W. C. Stewart	871,967
Insulator, H. D. Rodley	872,216
Iron. See Soldering iron	
Iron from tin plate scrap, detinning and recovering merchantable, E. A. Sperry	872,092
Ironing machine, A. R. Gustafson	872,123
Justifying mechanism, F. R. Converse, Jr.	872,223
Knitted fabric, L. N. D. Williams	872,163
Labeling machine, E. E. L. Boyer	871,776
Labeling machine bottle guide, H. Gates	871,794
Lacing device, boot and shoe, M. W. White	872,037
Ladder, H. Adler	872,165
Lamp cluster, incandescent, H. Hubbell	872,065
Lamp, gas, J. J. McIntyre	871,950
Lamp, incandescent gas, A. Rector	871,954
Lamp socket, incandescent, G. W. Goodridge	872,283
Lantern holder, W. B. Chittenden	872,052
Lathe dog, R. G. Nye	872,007
Lathe, engine, J. Hartness	872,233
Lathe tool holder, W. T. Russell	871,802
Lavatory, P. E. Law	871,876
Lead, manufacture of white, F. W. Morris	871,847
Level, S. H. Gardner	871,924
Leveling instrument, G. A. Jennings	872,183
Life net, C. Harrison	871,870
Linotype machines, distributor of double magazine, J. P. Thion	871,809
Liquid cooling device, A. Koch	871,940
Liquid fuel burner, J. H. Koons	872,288
Liquid separator, centrifugal, E. A. Forsberg	872,173
Liquids, device for separating materials held in suspension by, C. N. Walte	872,033
Loading apparatus, A. J. Derby	872,278
Loading device, wagon, R. Pederson	871,887
Lock, F. Siebert	872,156
Lock bolt keeper, J. Christy	872,053
Locomotive pilot, H. J. Dean	871,789
Locomotive tender, J. H. Davis	872,277
Loom, W. Wattle	872,035
Loom shuttle, A. Buckler	871,911
Loom shuttle changing mechanism, E. H. Ryon	872,254
Loom stop motion, C. D. Lanning	871,875
Loom take up mechanism, A. A. Gordon, Jr.	872,061
Mail receiver and deliverer for railway trains, A. Matlak, et al.	872,301
Mainspring winder, I. Kohn	872,135
Manure spreader, D. K. Wilson	871,845

Manure spreader, W. Galloway	871,867
Manure spreader, Litchfield & Garst	872,000
Mash tubs, drain controlling apparatus for, A. Aufrechtig	872,103
Massage implement, H. G. Hart	872,126
Match box, M. F. Luna	872,243
Match dipping apparatus, W. H. Parker	871,818
Match safe blank bending machine, Smith & Johnson	872,025
Mattress, F. H. Hirschman	871,871
Measure, C. W. Newton	871,814
Measuring apparatus, A. J. Felter	871,865
Measuring device, liquid, G. O. Seeley	871,827
Measuring instrument, Jacobson & Haughland	871,906
Measuring instrument, electrical, P. MacGahan	872,300
Metal, cleansing, J. Hawthorne	871,994
Metal joint, J. J. Souder	871,830
Metal rings, apparatus for upsetting, J. Clark	872,168
Metal structure, E. B. Repp	872,018
Milk cooling apparatus, Jewett & Bowen	872,286
Mixing apparatus, F. E. Rooney	872,084
Molding receptacle, J. S. Stewart	872,029
Motor control system, E. W. Stull	871,970
Motor controlling mechanism, electric, M. B. McLaughlin	872,143
Motor controlling mechanism, electric, E. D. Lewis	872,289
Motors, means for automatically controlling electric, H. W. Leonard	872,298
Muffler, Blanchard & Crocker	871,775
Music, recording, J. J. Walker	872,267
Musical instruments, automatic playing attachment for, P. Wein	872,313
Musical instruments, modulating attachment for automatic, T. Danquard	871,788
Musical instruments, narrow music sheet attachment for, T. Danquard	871,787
Muzzle, dog, W. H. Dusenbury	872,279
Nut burring machine, E. Mongrain	872,189
Nut lock, J. F. Fish	871,921
Nut lock, H. A. & J. P. Fisher	871,922
Oar for boats, R. Walterskirchen	872,158
Oil burning system, I. E. Smith	872,023
Oil channels in boxes, bearings, etc., machine for cutting spiral, W. Wattle	872,036
Oil cup lubricator, W. P. Phillips	872,012
Optical instrument, J. G. Gray	872,120
Ore pulp, filter for separating solutions from, O. L. Buckingham	871,860
Oven, M. Nusser	872,144
Oven, portable, W. J. Perry	871,819
Overalls, J. A. Sommers	872,089
Packing, rod, T. Johnston	872,132
Pad cover, G. F. Stewart	871,965
Pad covers, machine for making, G. F. Stewart	871,963
Pad covers, making, G. F. Stewart	871,966
Paint and varnish remover, J. F. Dickson	871,790
Paint and varnish, removing, J. M. Wilson	872,314
Paper boxes, machine for forming and applying wire bales to, C. D. Grimes	872,176
Paper making machine cutting attachment, C. H. McCormick	872,248
Partition, metal sheathed paneled, T. I. Duffy	872,058
Pen and pencil rack, combined, J. S. Twaddell	872,157
Perambulator, W. H. Smith	871,981
Piano, M. Clark	871,782
Piano action frame, H. J. Sandles	871,894
Piano action frame, J. W. Darley, Jr.	872,202
Piano, combined manually and mechanically operated, J. W. Darley, Jr.	871,916 to 871,919
Piano players, tracker bar for, F. W. Wood	872,315
Pin. See Cotter pin	
Pipe connection, H. Clayton	872,169
Pipe coupling, automatic train, Fyock & Stone	872,174
Pipe joint, flexible, W. A. Greenlaw	872,121
Pipe mold, cement, E. W. Buser	871,778
Pipe wrench, J. Roemer	871,958
Planter, J. D. Lancaster	871,941
Plants, stand for propping, J. G. Walton	871,901
Pneumatic cushion, W. C. McCullough	871,811
Pneumatic drill, portable, H. J. Kimman	871,939
Popcorn buttering device, J. M. Kline	872,239
Power generator, electromagnetic, J. L. Potter	872,251
Power system, R. H. Goldborough	871,983
Printing apparatus, M. McMahon	872,302
Printing machines, arrangement for giving movement to automatic numbering mechanisms for, J. D. Galwey	871,923
Printing machines, thread stretching device for the warps of drum, F. Schmidt	872,258
Printing press, E. L. Stone	871,831
Printing press, McCain & Henderson	872,004
Printing press, automatic, H. E. Brett	872,108
Projectile for rifled firearms, L. Schupmann	871,825
Projection apparatus, W. L. Patterson	872,303
Propeller or fan, F. G. Sargent	872,307
Propulsion, ship, P. H. Beltz	871,774
Pulley, expansion, G. F. Geb	872,282
Pulverizing mill, G. E. Rudnick	872,201
Pump, air, Beck & Bowyer	872,043
Pump for cleaning systems, suction, J. V. O. Palm	871,952
Pump lubricator, H. L. McCullough	872,249
Pump, rotary, Anderson & Lundin	872,040
Punching implement, belt, W. W. Woodley	872,210
Rail bond, A. H. Mosher	872,142
Rails, appliance for fixing and cutting off the upper or wearing portions of compound tramway, E. Rhodes	871,822
Rails, rerolling, A. P. Diescher	872,056
Railway equipment, warning post for, E. D. Hillman	871,936
Railway gate, F. J. Stein	872,028
Railway rolling stock, seat and seat back for, A. E. Ostrander	871,951
Railway signaling device, B. S. Miller	872,002
Railway switch, O. Harpold	872,178
Railway trains, automatic stop for, V. Morrison	872,141
Receptacle closure, A. L. Weissenthanner	872,160
Receptacle closure, hermetic, J. S. Giles	872,118
Red lakes, making, C. Immerheller	872,181
Reflector, A. D. Curtis	871,915
Refrigerator alarm, H. P. Kelly	871,873
Register attachment, W. H. Sowash	872,090
Regulator. See Gas pressure regulator	
Relasting apparatus, shoe, C. F. Pym	872,318
Relasting machine, C. F. Pym	872,317
Resistance, inclosed, H. J. Wiegand	872,208
Ring leads, means for protecting operators, W. W. Dean	872,171
Roll cutting attachment, rotary, A. E. Sexton	871,824
Rotary engine, J. E. Lehman	871,807
Rotary engine, T. C. Henry	872,234
Rotary explosive engine, Montan & Seholm	871,881
Rotary motor, J. E. Kinney	872,133
Salt shaker, F. Kendall	871,803
Sash lock and tightener, H. O. Wolf	872,089
Sausage stuffer, H. F. Hambruch	872,231
Sawmill, T. S. Wilkin	872,038
Sawmill log dog, Grant & Newton	871,795
Scaffold support, D. F. Luke	872,187
Scale, O. L. Gordon	872,119
Scalper, excavator, road roller, and locomotive, combined, C. J. Van Buren	872,159
Seal, G. H. Hulsing	871,872
Seaming machine, O. S. Beyer	871,855 to 871,857
Seed culler, cotton, B. Bowers	872,218
Self-extinguishing burner, E. Besenbruch	872,105
Sewer pipe cleaner, T. Cantwell	872,109
Sewing machine, lock stitch, F. W. Merri- ck	872,074
Sewing tubular structures, machine for, S. Cohn, reissue	12,724
Shade and curtain hanger, extension window, W. Wertman	871,841
Shade roller safety stop, C. T. Botting	871,858
Shaft oscillator, E. C. Wright	871,904
Sharpening and polishing machine, automatic, F. M. Rodzonowski	871,889
Shears, G. E. Benton	871,980
Sheet metal working machine, T. Vogt	871,834
Ship locks, working, G. Pumberger	872,082
Shoe rack, L. F. Bowen	872,047
Shovel, A. E. Baum	871,773
Shovels, scraper attachment for, B. J. Edwards	871,986
Sifter, ash, J. Guerin	871,929
Sifter for ashes, etc., S. W. Dunning	871,862
Signaling system, W. W. Salmon	871,960

"The Whole Thing in a Nutshell"



200 Eggs a Year Per Hen

HOW TO GET THEM

The sixth edition of the book, "200 Eggs a Year Per Hen," is now ready. Revised, enlarged, and in part rewritten; 90 pages. Contains among other things the method of feeding by which Mr. S. D. Fox, of Wolfboro, N. H., won the prize of \$100 in gold offered by the manufacturers of a well-known condition powder for the best egg record during the winter months. Simple as a, b, c—and yet we guarantee it to start hens to laying earlier and to induce them to lay more eggs than any other method under the sun. The book also contains a recipe for egg food and tonic used by Mr. Fox, which brought him in one winter day 68 eggs from 72 hens; and for five days in succession from the same flock 64 eggs a day. Mr. E. F. Chamberlain, of Wolfboro, N. H., says: "By following the methods outlined in your book I obtained 1,496 eggs from 91 R. I. Reds in the month of January, 1902." From 14 pullets picked at random out of a farmer's flock the author got 2,990 eggs in one year—an average of over 214 eggs apiece. It has been my ambition in writing "200 Eggs a Year per Hen" to make it the standard book on egg production and profits in poultry. Tells all there is to know, and tells it in a plain, common-sense way.


Price, 50 cents, or with a year's subscription to the American Poultry Advocate both for 75 cents, or given as a Premium for two yearly subscriptions at 50 cents each.

Our Paper is handsomely illustrated, 40 to 80 pages, 50 cents per year. Three months' trial 10 cents. Sample Free. CATALOGUE of poultry trial free.

AMERICAN POULTRY ADVOCATE

144 Hogan Block

Syracuse, N. Y.

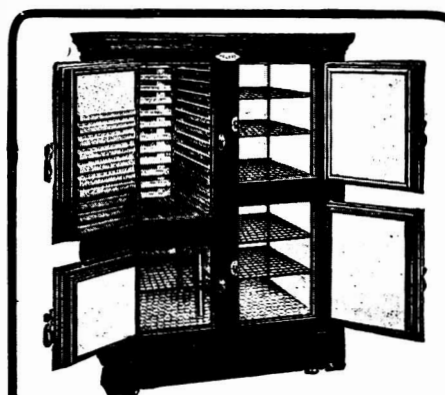

MANY OF THE FINEST U. S. BATTLESHIPS

ARE EQUIPPED WITH MODERN

McCray Refrigerators

Opal Glass, Tile or White Wood Lined

Made in stock sizes and built to order for Residences, Clubs, Hotels, Markets, Hospitals, Public Buildings, etc. The best refrigerating system for warm climates.

Gives perfect circulation of pure, cold, dry air and is economical in use of ice.

Write for catalog and full information. Catalog No. 81 for Residences, No. 46 for Hotels, Clubs, Public Institutions, etc., No. 57 for Meat Markets, No. 64 for Grocers, No. 71 for Florists.

McCray Refrigerator Co., 704 Mill St., Kendallville, Ind., U. S. A.

Make a Motor Boat of any Boat in 5 Minutes



Here's a little, 2 h. p. marine motor (40 lbs. complete) that you can attach to the stern post of your boat in 5 minutes without any tools. Drives an 18-ft. row boat 7 miles per hour (runs 8 hours on one gallon gasoline). Can be detached from boat just as quickly and stored in box in which it is carried. Simplest motor made—does not get out of order. Write for catalog with full description and price.

WATERMAN MARINE MOTOR CO.
1509 Fort St. West, Detroit, Mich.

2 H.P. STATIONARY ENGINE \$20.50 (ENGINE ONLY)

FOR FARM AND SHOP WORK. Run Separators, Corn Shredders, Grist Mills, Pumps, Dynamos, etc. Start without cranking, no cams or gears. Burns Alcohol, Kerosene and Gasoline. All sizes in stock, 2 to 20 horsepower. Steel connecting rods, anti-friction bearings, no vibration. Write for free catalogue.

DETROIT ENGINE WORKS
127 BELLEVUE AVE. DETROIT, MICH., U. S. A.



LEARN PLUMBING Short Hours—Big Pay

The best paid of all trades. Plumbers are always in demand. They have shorter hours and receive better wages than any other mechanic. By our improved method of instruction we make you a skillful, practical plumber in a short time. You'll be enabled to fill a good position in a few months, in which you can earn plumbers' wages. Write at once for illustrated catalog, which gives full particulars and terms. 449 Olive Street.

St. Louis Trades School
St. Louis, Mo.

Siphon, alternating, S. W. Miller.....	872.076
Skinner, siphon, C. Harbert.....	872.232
Skinner, tool, J. C. Boyle.....	872.232
Sleigh attachment, W. A. Betram.....	871.907
Snap hook, J. N. Bellinger.....	872.270
Snap hook, spring tongue, J. B. Baxter.....	871.979
Soldering iron, A. L. Gifford.....	872.229
Sole, boot and shoe, W. C. Stewart.....	871.968
Sole rounding and channeling machine, A. M. English.....	871.987
Sole slashing machine, W. C. Stewart.....	871.969
Spark destroyer for smoke stacks, F. J. Lyman.....	872.072
Sparkling device, Miller & Gilbough.....	872.075
Speed indicator and recorder, combined, G. E. Miffield.....	871.946
Speed recording instrument, C. H. d'La Monte.....	872.186
Spinning frames, whirl for cap, A. A. Sack.....	872.019
Spinning machines, pneumatic threading device for, P. A. Broeze.....	871.910
Spool stand, N. W. Hoskins.....	872.236
Spring, Edgerton & Golden.....	872.236
Sprinkling spring, Feazel & Thompson.....	871.864
Stamping and numbering machines, inking device for, J. French.....	872.281
Stannic chloride, producing, E. A. Sperry.....	872.205
Staple tacker, P. R. Glass.....	871.991
Steam boiler, C. D. Mosher.....	872.077
Steam boiler, H. V. Brady.....	872.291
Steel plant, T. S. Blair, Jr.....	872.046
Stereoscope, folding, W. Verbeck.....	871.974
Stirrup, J. Tvoit.....	872.264
Stone working machine tool holder, H. H. Mercer.....	871.944
Stop mechanism, H. Pulster.....	871.953
Stove, foundry drying, D. McNeill.....	871.812
Street sweeper, F. M. Pittman.....	872.196
Sulfur from furnace gases, apparatus for obtaining, F. R. Carpenter.....	871.912
Supporting and conveying apparatus, H. L. Hollis.....	872.063
Surface cleaning machine, R. B. Hutchison.....	871.937
Switching device, electric, J. A. Posey.....	872.197
Syringe, A. E. Bonesteel.....	872.217
Table, See Dining table.....	
Tag, meat, R. H. Jackson.....	872.238
Tank, W. H. McNutt.....	871.813
Telegraph system, quadruplex, J. J. Ghegan.....	872.228
Telephone exchanges, ringing device for, W. W. Dean.....	872.293
Telephone instruments, apparatus for furnishing, I. I. Shrader.....	872.204
Thread finishing machine, Lipps & Ott.....	871.999
Tickets into ticket compartments, contrivance for inserting loose packets of, H. J. Mueller.....	872.190
Tie plate and guard rail clamp, combined, W. P. Bosser.....	871.909
Tile construction, J. F. Warwick.....	871.838
Tile, illuminating, J. B. French.....	871.793
Tiles, ceiling and floor composed of, H. Westphal.....	872.098
Tire, R. M. Merriman.....	871.945
Tire channel cleaning device, W. C. Wegner.....	872.207
Tire cleat, traction wheel, W. Galloway.....	871.868
Tire patch, pneumatic, G. & E. Hagstrom.....	871.930
Tire protector fastening device, pneumatic, Morris & Townsend.....	872.246
Tire setting machine for rubber tires, Hixson & Powell.....	872.295
Tires, means for preventing side slip in pneumatic, Treffiere & Jehn.....	872.096
Tires, multipart mold for pneumatic, F. Veith.....	871.973
Tobacco box and cutter, pocket, I. Z. Cohen.....	871.983
Tobacco jar holder, I. Sehring.....	872.232
Tool, combination, F. W. Jackson.....	872.066
Tool, combination, P. A. Benet.....	872.271
Tool, hand operated, W. Broad.....	872.048
Tool post, C. C. Harris.....	871.798
Torch, marine, A. F. J. Johnson.....	871.997
Toy, H. M. Robinson.....	871.823
Toy swing, H. T. Kingsbury.....	872.069
Train lighting system, electric, W. Scribner.....	871.826
Transmitter, R. Hansen.....	872.284
Trap or water seal, J. J. Wade.....	871.836
Trolley securing device, J. Szekeres.....	872.094
Trousers and belt fastener, P. C. Noetzel.....	871.884
Truck, W. G. Price.....	872.017
Truck, cotton picker's, A. Sanders, et al.....	871.893
Truck frame, W. G. Price.....	872.016
Trunk tray hinge, J. J. Cannan.....	871.779
Tube cutter, J. G. Lusk.....	872.290
Tube stopper, S. Smith.....	872.024
Tug loop, F. F. Jennings.....	872.067
Turbine, elastic fluid, G. Dale.....	872.055
Turbine engine, W. J. Francke.....	871.792
Type setting machine gage, J. T. Wilson.....	871.902
Typewriter attachment, J. Oettinger.....	871.815
Typewriter ribbon attachment, W. F. Enders.....	872.113
Unwinding machine, J. E. Windle.....	871.848
Valve, E. Phillipson.....	872.304
Valve, automatically opening, P. A. McCullough.....	872.005
Valve, flushing, R. A. Brooks.....	871.859
Valve gear, H. Mayer.....	872.128
Valve, safety, A. Wache.....	871.975
Vault, sectional, E. J. Winslow.....	871.977
Vehicle bodies, reinforced corner for, D. M. & T. H. Parry.....	871.886
Vehicle controlling mechanism, self-propelled, C. C. & H. R. Worthington.....	872.101
Vehicle for agricultural purposes, motor, H. P. Sanderson.....	872.255
Vehicle spring, A. Falkenhainer.....	871.920
Vehicle, water, J. Mikulasek.....	872.140
Vehicle wheel, E. Sutherland.....	872.311
Vehicles, evener for, A. L. & D. McGregor.....	872.006
Velocipede, D. K. Wilson.....	871.847
Vending machine, Rohde & Mueller.....	871.890
Vending machine, coin operated, J. A. Rule.....	871.824
Veneer clamp, A. A. Anderson.....	871.769
Ventilation system, double, H. I. M. Ross.....	872.199
Vise, J. E. Osmer.....	871.816
Vise, F. W. Stroh.....	872.310
Wagon, dump, W. Atkins.....	871.771
Wall construction, Steele & Shuster.....	872.262
Washboard, E. M. Saunders.....	872.308
Water closet seat covering, F. M. Schaffer.....	871.896
Water cooler, C. F. Conover.....	871.914
Water heater, R. A. Heffley.....	872.129
Water motor, R. Ziehler.....	871.852
Water wheel, W. M. Saunders, et al.....	872.202
Weather strip, metal, L. S. Bacon.....	871.853
Well drilling apparatus, C. M. Heeter.....	872.128
Well drilling machinery, sand line reel for deep, H. D. Fidler.....	871.791
Wheel, See Vehicle wheel.....	
Whip socket, G. Dumas.....	872.059
Window and door screen, J. G. Wilson.....	871.843
Window pane fastening, M. A. Olson.....	872.192
Wire stretcher, D. C. Pullins.....	872.198
Wool washing machine, F. G. Sargent.....	872.020
Wrapping device, package, J. D. Coughlin.....	871.985
Wrench, O. H. Gentry.....	872.117
Yoke fastener, C. Melchert.....	872.244
Yoke for wire carrying hooks, B. S. Downey.....	872.112

DESIGNS.

Bottle opener, milk, A. Newcomb.....	38.899
Carpet fabric, G. Hawkins.....	38.904
Cigar lighter, L. W. Rice.....	38.901
Fabric, textile, H. W. Fowler.....	38.906
Fabric, textile, E. L. Mosenthal.....	38.908
Fabric, textile, A. Olsson.....	38.909
Fabric, textile, L. Russell.....	38.911
Ice pick, Wood & Schade.....	38.900
Necktie, G. O. Sanborn.....	38.914
Ribbon, E. M. Corbett.....	38.912
Spoon or similar article, Cress & Court.....	38.897
Sterilizing receptacle, E. Kronman.....	38.898
Vending machine casing, W. J. Paul.....	38.902
Wire fabric, H. Sussman.....	38.903

TRADE MARKS.


Allzarin, G. W. Gilbert.....	66.366
Automobiles, Haggard Motor Vehicle Co.....	66.439
Bed springs, Haggard & Marcusson Co.....	66.409
Bells and parts thereof, certain, J. G. Brill Co.....	66.424
Beverage, non-alcoholic, O. Scholz.....	66.396
Bitters, J. Wagner & Sons.....	66.463
Boots and shoes, leather, Cosby Shoe Co.....	66.356

THE HARRINGTON & KING PERFORATING CO.

PERFORATED METAL

OF EVERY DESCRIPTION,
FOR ALL USES.

225 NO. UNION STREET, - - CHICAGO, ILL.

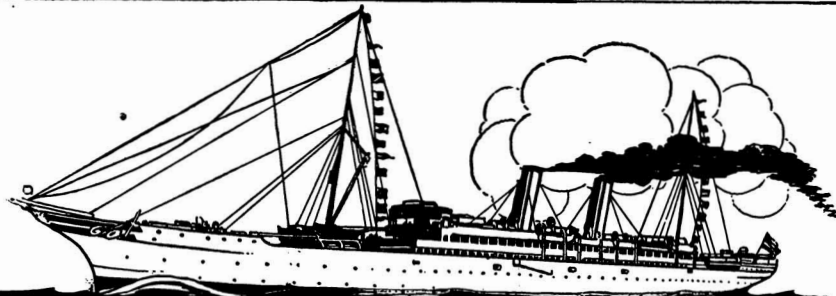

Delightful Cruises

On the superb S. S. "Oceana" and the S. S. "Kronprinzessin Cecilie" to the

**WEST INDIES, NASSAU, VENEZUELA
BERMUDA AND PANAMA CANAL.**

5 cruises in January and February—16 to 28 days
For booklet and particulars apply

Hamburg-American Line

NEW YORK

BOSTON

PHILADELPHIA

CHICAGO

ST. LOUIS and SAN FRANCISCO

The Cunard Steamship Co. Ltd.

NEW YORK-LIVERPOOL SERVICE

LUCANIA
13,000 Tons

CAMPANIA
13,000 Tons

UMBRIA
8,200 Tons

ETRURIA
8,200 Tons

+ CARONIA

20,000 Tons

+ Sister to Caronia except as to engines.

* CARMANIA

20,000 Tons

* Triple-screw, one of the largest turbine steamships in the world.

LUSITANIA

THE LARGEST, FASTEST AND
FINEST STEAMSHIPS IN
THE WORLD

MAURETANIA

BOSTON-LIVERPOOL SERVICE

SAXONIA
IVERNIA
SYLVANIA

14,300 Tons
14,100 "
5,600 "

New York-Mediterranean-Adriatic Service

CARPATHIA
SLAVONIA
PANNONIA
ULTONIA

13,600 Tons
10,600 "
10,000 "
10,400 "

This Mediterranean fleet is in service all year and is supplemented during the winter season by the CARONIA and CARMANIA which make special cruises to Alexandria with intermediate stops at Madeira, Gibraltar, Genoa and Naples.

CUNARD LINE OFFICES

21-24 State St.
Cunard Building, 126 State St.
67 Dearborn St.
Metropolitan Building

NEW YORK
BOSTON, MASS.
CHICAGO, ILL.
MINNEAPOLIS MINN.

The man who owns a mechanical cleaning wagon **MAKES MONEY**
We are ready to prove that

\$3000.00 Can be Made

This year,—next year,—and the years after cleaning houses by our patented machinery, by energetic, competent men. Over 300 operators in as many towns in the United States.

We make the most efficient stationary systems for Residences—Hotels—Office Buildings, etc.

The Largest Manufacturers of Cleaning Machinery in the World

GENL. COMPRESSED AIR AND VACUUM MACHINERY CO.


1479 A Olive Street, ST. LOUIS, MO.



WRITE
FOR CATALOG

WE OWN THE PATENTS
AND ARE PROSECUTING
ALL INFRINGERS

THE MACHINE THAT
MAKES THE MONEY





MODEL, No. 3

The HOLSMAN AUTOMOBILE

RIDES LIKE A CARRIAGE

The Holsman Has Now Had

5 Years of Success

A standard type of power vehicle, light, strong, handsome, high-wheeled, high-bodied, simple and splendidly efficient. "Rides Like a Carriage," noiselessly and smoothly over paved city streets or rockiest, ruttiest country roads. Practically no repairs and low maintenance.

Solid Rubber Tires—no Pneumatics to Collapse. Air-cooled—No Water to Freeze. Holsman Features are all Fully Patented.


Two simple hand levers regulate entire control—start, steer, stop, reverse and brake. No live axles, friction clutches, differential gears, pumps, etc. Double hill-climbing power in reserve. Do not be induced to help some new inventor work out his experiments on you by buying a machine that has not been on the market more than a year.

We are pleased to answer inquiries.


Send To-day for Handsome Booklet—FREE

HOLSMAN AUTOMOBILE COMPANY, 415 Monadnock Block, CHICAGO


The Oldest and Largest Manufacturers of Carriage Automobiles



MODEL, No. 9



MODEL, No. 10



MODEL, No. 11

H & R REVOLVERS



HERE IS THE

New H & R Target Grip

The Realization of a Long Felt Want



**Light
Compact
Durable**

The first
Combination of a
Medium Price
Revolver with a Perfect
Full Grip.

The extension hard rubber
stock affords a perfect grip.

It is fitted to the frame and by having the regular
stocks (furnished extra) can be interchanged for pocket
use.

The target grip can be supplied with H & R Auto-
matic, Police Automatic, Premier, Police Premier and
H & R Double Action Models 1904, 1905 and 1906.

Every H & R Revolver is just as good as skilled labor, the best
material and over 35 years of experience in fine firearms-making can
produce. They are accurate shooters, perfect in balance, beautiful in
appearance and finish. They are made in many styles and sizes as
described in our beautifully illustrated catalog among which we would
especially recommend our **H & R AUTOMATIC DOUBLE ACTION** 32
caliber, 6-shot, or 38 caliber, 5-shot, 3/4-in. barrel, finest nickel finish, \$6.00.
THE H & R HAMMERLESS, \$7.00. Target grip, as illustrated, \$1.00
extra. Sold by first-class dealers.


Rather than accept a substitute order from us direct. Look for our
name on barrel and the little target trade mark on the handle.

Write to-day for illustrated catalog.

HARRINGTON & RICHARDSON ARMS CO.

428 Park Avenue, Worcester, Mass.

North German Lloyd

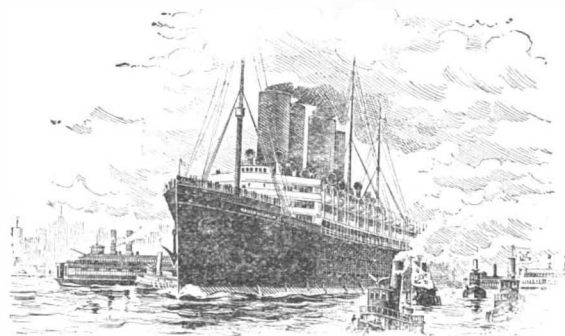

**Twin-screw Express Service, Sailing TUESDAYS for
Plymouth, London, Cherbourg, Paris, Bremen**

"Kaiser Wilhelm II" "Kronprinzessin Cecilie" "Kronprinz Wilhelm"
"Kaiser Wilhelm der Grosse"

**Twin-Screw Passenger Service, Sailing THURSDAYS for
Plymouth, London, Cherbourg, Paris, Bremen**

"Washington" "Prinz Friedrich Wilhelm" "Grosser Kurfuerst"
(Building) (Building)
"Prinzess Alice" "Friedrich der Grosse" "Bremen"

**Mediterranean Express Service, Sailing SATURDAYS for
Gibraltar, Naples and Genoa**

"Prinzess Irene" "Koenig Albert" "Koenigin Louise" "Barbarossa"

**SPECIAL TRAINS CONNECT AT PLYMOUTH FOR LONDON.
CHERBOURG FOR PARIS**

**Connections at Bremen, Southampton, Genoa and Naples for China, Japan
and Australia, Naples to Alexandria, Naples to the Levant**

FOR RATES, PLANS, ETC., APPLY TO

**OELRICHS & CO., General Agents,
5 Broadway, NEW YORK**

TELEPHONE 2200 RECTOR

(Bowling Green Building)


SCHERZER ROLLING LIFT BRIDGES



Modern Highway and Electric Railway Scherzer
Rolling Lift Bridge open for the passage of large
vessel. Superseded and replaced a center pier swing
bridge. On Lakes to the Gulf Deep Water-way.

Make it possible to navigate large modern vessels to Harbors,
Docks, Interior Waterways and Interior Ports inaccessible where
center pier swing bridges are built. Center pier swing bridges
are obsolete. They form artificial obstructions blocking naviga-
tion and commerce. They are condemned, removed and replaced
by modern Scherzer Rolling Lift Bridges wherever Manufacturing,
Commerce, Transportation, Railroads and Ships are valued,
protected and advanced.

More than one hundred center pier swing bridges have
already been superseded, discarded, scrapped and replaced by
modern Scherzer Rolling Lift Bridges for Railways, Electric
Railways and Highways in the United States, England, Ireland,
Holland, Egypt, India, Argentine Republic, Mexico, Russia
and other countries.

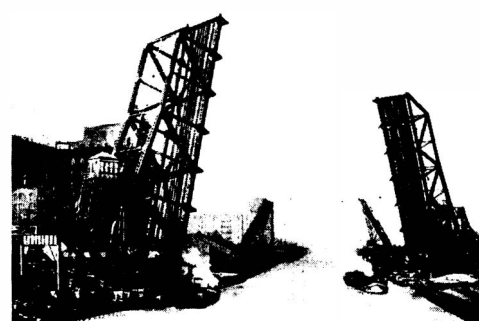

Modern Railroad Scherzer Rolling Lift Bridge in the
open position. Longest span Bascule Bridge in the
world. Also Highway Scherzer Rolling Lift Bridge
open further down the river.

HIGHEST AWARD, WORLD'S FAIR, ST. LOUIS, 1904.

Write us for information, photographs, sketches and estimates.

THE SCHERZER ROLLING LIFT BRIDGE CO.

Main Offices: Monadnock Block, CHICAGO, U. S. A.

Eastern Office: 220 Broadway, NEW YORK CITY

Cable Address: "SCHERZER, CHICAGO."



"Tanks with a Reputation."

CALDWELL Tanks and Towers

provide abundance of water for all purposes in Mills, Factories, Towns and Country Homes. Reliable and permanent service assured. Ample pressure, as well, for safe fire protection.

Our building plans, in connection with selected high-grade material, insure great tank durability and enormous tower stability.

Endorsed by eminent architects, engineers, and thousands of satisfied customers.

25 YEARS' EXPERIENCE

We erect anything in United States, Canada and Mexico. For catalogue, full information and references near you address Dept. S F.

W. E. CALDWELL CO., Louisville, Ky.

Tanks { Steel—Wood } Towers
Wind Mills—Pumps—Gas Engines

Concrete, Reinforced Concrete AND Concrete Building Blocks

Scientific American Supplement 1543 contains an article on Concrete, by Brysson Cunningham. The article clearly describes the proper composition and mixture of concrete and gives results of elaborate tests.

Scientific American Supplement 1538 gives the proportion of gravel and sand to be used in concrete.

Scientific American Supplements 1567, 1568, 1569, 1570, and 1571 contain an elaborate discussion by Lieut. Henry J. Jones of the various systems of reinforcing concrete, concrete construction, and their applications. These articles constitute a splendid text book on the subject of reinforced concrete. Nothing better has been published.

Scientific American Supplement 997 contains an article by Spencer Newberry in which practical notes on the proper preparation of concrete are given.

Scientific American Supplements 1568 and 1569 present a helpful account of the making of concrete blocks by Spencer Newberry.

Scientific American Supplement 1534 gives a critical review of the engineering value of reinforced concrete.

Scientific American Supplements 1547 and 1548 give a resume in which the various systems of reinforced concrete construction are discussed and illustrated.

Scientific American Supplement 1564 contains an article by Lewis A. Hicks in which the merits and defects of reinforced concrete are analyzed.

Scientific American Supplement 1551 contains the principles of reinforced concrete with some practical illustrations by Walter Loring Webb.

Scientific American Supplement 1573 contains an article by Louis H. Gibson on the principles of success in concrete block manufacture, illustrated.

Scientific American Supplement 1574 discusses steel for reinforced concrete.

Scientific American Supplements 1575, 1576, and 1577 contain a paper by Philip L. Wormley, Jr., on cement mortar and concrete, their preparation and use for farm purposes. The paper exhaustively discusses the making of mortar and concrete, depositing of concrete, facing concrete, wood forms, concrete sidewalks, details of construction of reinforced concrete posts.

Each number of the Supplement costs 10 cents.

A set of papers containing all the articles above mentioned will be mailed for \$1.80.

Order from your newsdealer or from


MUNN & CO.

361 Broadway, New York City

LEARN ENGRAVING

A profitable, High-Grade, Enjoyable business. Competent men make from \$30.00 to \$100.00 per week. Our correspondence course does away with the many years' apprenticeship hitherto required and enables one to master the work thoroughly in a short time. Established seventeen years. Write for prospectus.

REES ENGRAVING SCHOOL
332 Steele Bldg. ELMIRA, N. Y.



A. J. Wilkinson & Co., Machinery, 184-188 Washington St., Boston, Mass.

Improved Power or Hand Planer

for the model maker, experimenter, or amateur. Its features are the Double Lifting Screws and the simple manner of changing from power to the Hand Crank. Workmanship guaranteed throughout. List price complete \$15. Parts interchangeable.

Bottle nipples, Faultless Rubber Co.	66,436
Candied popcorn, Rueckheim Bros. & Eckstein	66,414
Candies, chocolates and other, Rueckheim Bros. & Eckstein	66,395
Candy, Greek American Confectionery Co.	66,388
Candy, Schraders	66,397
Candy, peanut, Bosman & Lobman Co.	66,384
Canned meat, August Kress Co.	66,379
Cartridges, loaded shells, caps, etc., Peters Cartridge Co.	66,374
Cement and asphalt, hydraulic, P. H. Trummer & O. Vogler	66,416
Chemicals, certain, Chemische Werke Hansa Gesellschaft mit beschränkter Haftung	66,353
Clothes wringers, American Wringer Co.	66,417
Clothing, certain, M. Half & Bro.	66,425
Coal, coke, breeze, etc., Coalite Limited	66,405
Cocktails, E. Heffernan	66,422
Corset stiffeners and stays, E. C. Weeks	66,446
Cotton piece goods, dyed, Wm. Simpson, Sons & Co.	66,430
Dental cement, O. M. Springer	66,399
Electrical conductors, certain, Electric Railway Improvement Co.	66,420
Fertilizers and fertilizing materials, B. Diaz & Co.	66,419
Flavoring extracts, Baker Extract Co.	66,403
Flavoring for soda water, etc., Benton, Hall & Co.	66,381
Flavoring for tonic mixtures, E. B. Hall	66,389
Flour, wheat, Columbia Mill & Elevator Co.	66,386
Flour, wheat, Holmes and Barnes	66,410
Food products, J. P. Cooper	66,406
Foods, certain cereal, Corno Mills Co.	66,407
Fruits, basketed fresh, Charles & Co.	66,385
Golf club irons, A. G. Spalding & Bros.	66,434
Hair tonic and scalp remedy, M. L. Campbell	66,352
Hair tonics, T. J. Mowry	66,455
Hair tonics and restorers, G. O. Ranson & Co.	66,457
Ham, mortadelle, capicola, etc., pressed, H. Florentini	66,408
Hosiery, Lord & Taylor	66,368
Hosiery, M. Half & Bro.	66,373
Hosiery, Rubens & Meyer	66,394
Insecticide distributors, Leggett & Brother	66,425
Knit undershirts, Rubens & Marble	66,377
Knives, razors, and shears, W. Pope	66,444
Ladders, wooden step, E. M. Murray	66,392
Magazine, monthly, Sporting Goods Publishing Co.	66,460
Malt preparations, certain, J. B. Weyermann	66,433
Medicinal preparations, certain, Silver Suls Manufacturing Co.	66,429
Medicinal salts, Physicians Supply Co.	66,375
Medicines, certain, T. F. Laubach	66,367
Mosquito repellent, J. E. Lyle	66,372
Naphtha, Standard Oil Co. of New York	66,462
Ochers, Firm of F. A. Reichard	66,458
Oil, certain, A. J. Johnson	66,390
Oil, corn, Corn Products Co.	66,448
Overcoats, coats, pants, and vests, J. A. Marks	66,427
Packing, machinery, B. F. Goodrich Co.	66,351
Paints, enamels, fillers, etc., S. B. Bowen	66,418
Pamphlets relating to finance, Knickerbocker Audit Co.	66,440
Paper, safety, George La Monte & Son	66,452
Paper, weekly, Sporting News Publishing Co.	66,461
Paper, writing and printing, American Writing Paper Co.	66,435
Pencils and rubber erasers, lead, E. Faber	66,363
Pencils, lead, E. Faber	66,358
Perfumes and perfumed toilet powders, S. Palmer	66,456
Pillow tops and slips and laundry bags, Sontheim & Magnus	66,431
Polishing and plating compounds, Argentina Co.	66,402
Preparation for the treatment of finger nails, F. Harnisch	66,454
Preserving compounds, chemical, Protegit Co.	66,376
Pumps, steam engines, turbines, and parts thereof, Maschinenfabrik Odesse Gesellschaft mit beschränkter Haftung	66,443
Pyrographic outfits, F. F. Rick & Co.	66,387
Rubber erasers, E. Faber	66,364
Sausage and ham, National Packing Co.	66,413
Shoes, leather, E. E. Taylor Co.	66,357
Skins and rugs, certain, C. Schmitz & Co.	66,415
Soap, Lever Brothers	66,442
Soap made of wool fat, Vereinigte Chemische Werke Aktiengesellschaft	66,400
Soaps, L. F. Shimmers	66,398
Soaps, toilet, E. T. Babbitt, Inc.	66,380
Stove and metal polish, F. & E. Liebscher	66,411
Teas, J. M. Montgomery	66,412
Thread or spool cotton, sewing, Blodgett & Orswell Co.	66,382
Thread, spool and sewing cotton, American Thread Co.	66,401
Tonic, laxative, and digestive preparations, L. Childs	66,355
Trunks, leather, Sigel Cooper Co.	66,378
Unguent or salve, Frederick Laboratory	66,365
Varnish, Glidden Varnish Co.	66,437
Washing compound, Pacific Coast Borax Co.	66,393
Whisky, Glasner & Barzen Distilling & Importing Co.	66,421
Whisky, Henry Thode Co.	66,423
Whisky, Mattingly & Moore Dist'y Co.	66,428
Whisky, Ullman Einstein Co.	66,432
Whisky, Van Vleet, Van Vleet & Co.	66,445
Wine and beer, preparation for preserving, A. Boake Roberts & Co.	66,447
Wines, California, T. Grumbach	66,438

LABELS.

"A. H. S." for prepared potted beef, A. H. Smith	13,901
"Baker Bourbon" for whisky, Frankfort Distillery	13,897
"Baker Rye" for whisky, Frankfort Distillery	13,898
"Bromo-Mint" for medicine, F. P. Crozier	13,902
"Hombrew" for beer, Home Brewing & Ice Co.	13,896
"Ido" for a beverage, Home Brewing & Ice Co.	13,899
"Mack Mahon's Diamond Back Oil" for a medicinal oil, J. M. Mahon	13,904
"Mentholum" for a salve, Mentholatum Co.	13,903
"Protection" for cigars, Heineman Brothers	13,895
"The Ideal Liniment" for a liniment for man and beast, K. S. Gross & Co.	13,905
"The Only 5c. Bull Heads" for cigars, J. Furthmann	13,894
"White Star Water" for drinking water, J. Greenberg	13,900

PRINTS.

"Apparel for Man and Boy" for clothing, E. L. Boone	2,166
"Budweiser Girl" for beer, Anheuser-Busch Brewing Ass'n	2,161
"California Souvenir Playing Cards" for playing cards, M. Rieder	2,162
"Champion Harvesting Machines" for harvesting machinery, Hayes Lithographing Co.	2,168
"Immaculate" for enamels, Pinchin, Johnson & Co.	2,164
"Men's and Boys' Apparel" for men's and boys' apparel, H. C. Lytton	2,167
"Meritas, Table Oil Cloth" for table oil cloth, Standard Oil Cloth Co.	2,163
"Sanitas, Cloth Wall Covering" for cloth wall covering, Standard Oil Cloth Co.	2,165

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address Munn & Co., 361 Broadway, New York.



ON DUTY
ON PLEASURE

Wachusett SHIRTS


are universally preferred by critical men. They are distinctive shirts, and their worth is attested quite as much by the men who wear them as by their increasing sales.

Wachusett Shirts lend themselves particularly to that versatility of dress now so characteristic of American men. In all seasons of the year; at all times and places, they will be found absolutely correct in style and fabric—well made—dependable in every way.

If you have not yet tried Wachusett Shirts do so at the earliest opportunity. You will find them to be superior shirts and worthy of your most intimate acquaintance. In fact you will vote them the inevitable choice of the man who seeks appropriate things in dress.

Ask your dealer for Wachusett make. Booklet free.

WACHUSETT SHIRT CO., Dept. 2, Leominster, Mass.
Manufacturers of white, fancy, negligé and coat shirts, night robes and pajamas

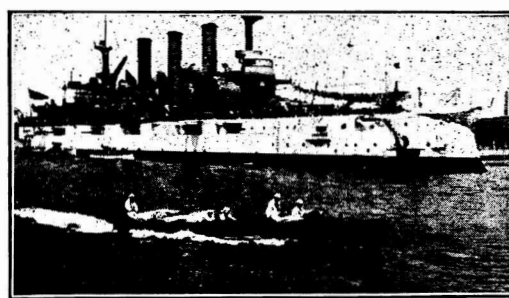

U. S. S. Flagship CONNECTICUT
Showing Admiral's Barge, with our 80 H. P. Motor

The BROWNELL or B Motors Have No Superior

Embody most scientific and approved principles of internal combustion engine construction

4, 6 and 8 Cylinders
15-160 Horse Power

F. A. BROWNELL MOTOR COMPANY
Successors to

BROWNELL-TREBERT COMPANY
634-666 Lexington Ave., Rochester, N. Y.

ARTHUR KOPPEL COMPANY


Consulting Engineers and Manufacturers of

Portable and Industrial Railways



Transportation is one of the vital points in industrial or contracting operations. It is our business not only to manufacture, but to design and install complete industrial and portable railways, thus insuring the greatest degree of economy in transportation of raw materials or finished products.

ARTHUR KOPPEL COMPANY
NEW YORK PITTSBURGH CHICAGO SAN FRANCISCO



Foreign Agents Wanted For Mullins Steel Boats

Mullins Pressed Steel Boats are particularly adapted for use in hot climates. Built with air chambers in each end. Cannot sink, crack or leak—indestructible, elegant in design and finish and superior to wooden boats. Mullins Steel Motor Boats are fast and noiseless. Write for illustrated catalogue in English, French, German or Spanish, giving complete description of the celebrated Mullins Motor Boats, Row Boats, Hunting and Fishing Boats.

The W. H. Mullins Co. 118 Franklin St. Salem, O., U. S. A.

EVERYTHING FOR THE AUTOMOBILE

INVENTORY FLYER NO. 17

(Just Issued, Write for it)

\$25,000.00 OVER STOCK

Automobile Parts and Supplies United

NEUSTADT AUTOMOBILE & SUPPLY CO.
3932 Olive Street, St. Louis, Mo.

MORE MONEY FOR YOU

NEW BOOKS, ETC.

GRINDING AND TAPPING TOOLS, PROCESSES, AND FIXTURES. By Joseph V. Woodworth. New York: Hill Publishing Company. 8vo.; cloth; 162 pages illustrated. Price, \$2.

In machine shops the development of uses for emery wheels has been remarkable, and there is to-day an immense amount of work done with the emery wheel that a few years ago it was not considered possible to handle in this way. "Lapping and Grinding" is the very latest work on the subject, and is written in a clear, practical manner by a practical man. It should be in the hands of every mechanical engineer and up-to-date mechanic. The following list of contents is its best recommendation: Grinding; Conditions, Rules, Methods, Processes, Machines and Attachments for Accurate Grinding; Use and Preparation of Abrasives; Laps and Lapping; Construction and Use of Tools and Processes for Finishing Gages, Tools, Dies, and Machine Parts to Accurate Dimensions, Construction, Use and Operation of Grinding Fixtures and Jigs for Finishing Repetition Parts and Articles of Metal, Small Hardened and Tempered Steel Parts and Special Work; The Hardening and Tempering of Interchangeable Tool Steel Parts of Delicate Structure which require to be Ground and Lapped Afterward; Percentage of Carbon Crucible Steel Ground Parts and Tools Should Contain.

AGGLUTINANTS OF ALL KINDS FOR ALL PURPOSES. By H. C. Standage. New York: D. Van Nostrand Company. 1907. Cloth; 5½ x 8½ inches; 247 pages; 508 recipes and numerous notes. Price, \$3.50.

It is seldom that one finds such an excellent collection of recipes for glues and similar compounds so conveniently arranged as they are in this work. They are arranged under the headings of the trades to which they are of greatest use, and are also referred to in a complete index. Every recipe has been tested and found to do what is claimed of it.

THE CONSTRUCTION OF DYNAMOS. (Alternating and Direct-Current.) A Text Book for Students, Engineer-Constructors, and Electricians in Charge. By Tyson Sewell. With nearly 550 illustrations and diagrams specially drawn and engraved for this work. London: Crosby, Lockwood & Son. New York: D. Van Nostrand Company. 8vo.; cloth; 316 pages. Price, \$3.

This work deals in a single volume of handy size with the theory, design, and construction of dynamos, both alternating and direct-current. The treatment is sufficiently detailed to make it useful as a textbook for students and apprentices as well as helpful as a reference book to engineers.

The early chapters deal with fundamental principles; polyphase currents, however, being treated later on as an introduction to polyphase alternators. The examples of design introduced in the work are for illustration only, since the work of designing falls to the lot of comparatively few men; most manufacturers having standardized particular lines, which can be made to fill the majority of requirements, with slight modification.

SHAFT SINKING UNDER DIFFICULT CONDITIONS. By J. Riemer. Translated from the German by C. R. Corning and Robert Peele. New York: John Wiley & Sons. 8vo.; cloth; 19 plates, 176 pages. Price, \$3.

Little need has arisen in America to exploit mineral beds that are very difficult to work. Where the difficulties have seemed too great, such bodies have been allowed to remain undeveloped, and deposits of easier access have been successfully sought. In Germany the conditions are different. Mining operations are carried on there under conditions that we would consider too unfavorable to be profitable. It is with some special cases of such a nature that this work deals; cases in which the soil was so permeated with water that the difficult freezing method, as well as others, had to be resorted to before the operations could be completed with success, or indeed could be completed at all.

STANDARD POLYPHASE APPARATUS AND SYSTEMS. By Maurice A. Oudin. New York: D. Van Nostrand Company. London: Sampson Low & Co. 8vo.; cloth; 369 pages, 207 illustrations and diagrams. Price, \$3 net.


This book, first issued in 1899, has reached its fifth edition and has been enlarged and brought up to date. Full of practical information and containing a number of useful tables, it forms a valuable reference book for men who operate or are interested in alternate current machinery.

THE MANUAL OF STATISTICS. New York: The Manual of Statistics Company, 1907. 8vo.; pp. 1064. Price, \$5.

The Manual of Statistics for 1907, being the twenty-ninth annual issue of that standard reference publication, has just made its appearance. As usual, it contains in concise and complete form the information regarding railroad and industrial corporations of the United States and Canada, government securities, mining stocks, and the grain and cotton stocks which are required by investors, speculators,

Consult Parsons First, Then Hire a Lawyer—If Needed

Send for a copy on thirty days' free examination, express prepaid by us. If it is what we claim, remit \$3.50 to keep it; if not, notify us and we will send stamps for its return



9x6½ inches, 872 Pages, Strong Law Canvas.

Best Friend of Both **EMPLOYERS and EMPLOYED!**

The Foremost of Money-Savers in telling you what NO! to do

THE FAMOUS LEGAL STANDARD PARSONS' LAWS OF BUSINESS

Manufacturers, Inventors, Heads of Department, Skilled Specialty Makers, Business and Professional Men: Would you know without a swingeing fee your rights and duties under Patents, Trade Marks, Copyright? **Ask Parsons.** At whose risk your wife's furs or your watch are left at the repairer's? **Ask Parsons.**

What liens of mechanics and material men take first place? **Ask Parsons.** What happens to your lease if your shop burns down? **Ask Parsons.**

What can you enforce as a landlord or force as a tenant? **Ask Parsons.** How binding a contract you can make with a minor? **Ask Parsons.**

What can you do with out your wife's (or a) consent? **Ask Parsons.** What is a valid promissory note, business agreement, consideration of a bargain, condition of a bond, sale of property, and how to word one to prevent its being waste paper? **Ask Parsons.**

What sort of promise holds one for a surety? **Ask Parsons.** What constitutes one person an agent for another? **Ask Parsons.**

What a partnership obligates one for? **Ask Parsons.** What one can claim from or as a common carrier? **Ask Parsons.**

What are the statutes of limitations on claims or debts? **Ask Parsons.** What will invalidate your fire or life insurance? **Ask Parsons.**

How can you or cannot collect a debt? **Ask Parsons.** How to act legally in a hundred common transactions of life? **Ask Parsons.**

Up-to-Date (1907).—The book contains also abstracts of All State Laws relating to Collection of Debts, Interest Usury, Deeds, Holidays, Days of Grace, Limitations, Liens, etc. Likewise nearly 300 Approved Forms of all kinds. Over 220,000 have bought the book and found it solid reliance. Send to

THE S. S. SCRANTON CO. (Established 1866), HARTFORD, CONN.

We Will Make You Prosperous



If you are honest and ambitious write us today. No matter where you live or what your occupation, we will teach you the Real Estate business by mail; appoint you Special Representative of our Company in your town; start you in a profitable business of your own, and help you make big money at once. Unusual opportunity for men without capital to become independent for life. Valuable book A (20 and full particulars free. Write today. Address nearest office.


NATIONAL CO-OPERATIVE REALTY CO.

Phelps Bldg., Scranton, Pa. Marden Bldg., Washington, D. C. Athenaeum Bldg., Chicago, Ill.



Registering Counters for printing presses, power presses and automatic machines, and also Counters for measuring by the foot or yard. **THE C. J. ROOT COMPANY, 100 Church St., Bristol, Conn.**

Make Your Own Fertilizer



at Small Cost with **WILSON'S PHOSPHATE MILLS**

From 1 to 40 H. P. Also Bone Cutters, hand and power, for the poultrymen; grit and shell mills, farm feed mills, family gist mills, scrap cake mills. Send for our catalog.

Wilson Bros., Sole Mfrs., Easton, Pa.

WIRELESS TELEGRAPHY.—ITS PROGRESS and Present Condition are well discussed in SCIENTIFIC AMERICAN SUPPLEMENTS 1425, 1426, 1427, 1386, 1388, 1389, 1391, 1397, 1398, 1399, 1431. Price 10 cents each, by mail. Munn & Co., 361 Broadway, New York City, and all newsdealers.

NO MONEY DOWN MEN'S SUITS ON CREDIT \$1.00 A WEEK



Buy Men's Suits, Overcoats and Raincoats direct from our factory by mail

For \$15 and \$18

We require no security and we trust any honest person anywhere in the United States.

We send garments on approval—you don't pay a penny till you get the clothes and find them satisfactory—then pay \$1.00 A WEEK.

We are the pioneers and twice over the largest Credit Clothiers in the world. We operate 73 stores in the principal cities of the United States and have over 500,000 customers on our books.

FREE Send today for our fine line of Stylish Winter samples, self measurement blank, tape and full particulars of our convenient payment plan—all free to you. Commercial rating \$1,000,000.

Menter & Rosenbloom Co.

294 St. Paul Street Rochester, N. Y.


The Scientific American Cyclopedia of Receipts Notes and Queries

REVISED EDITION

15,000 Receipts 734 Pages Price \$5.00

MAILED TO ANY PART OF THE WORLD

THE SCIENTIFIC AMERICAN CYCLOPEDIA OF RECEIPTS, NOTES AND QUERIES has had an unprecedented sale. It has been used by chemists, technologists, and those unfamiliar with the arts, with equal success, and has demonstrated that it is a book which is useful in the laboratory, factory or home. It consists of a careful compilation of the most useful receipts, and information which have appeared in the **SCIENTIFIC AMERICAN** for more than half a century. Over 15,000 selected formulæ are here collected, nearly every branch of the useful arts being represented. Many of the principal substances and raw materials used in the arts are described, and almost every inquiry relating to formulæ will be found answered. It is more than a receipt book, as in most cases it gives all the standard and special formulæ, thus enabling the reader to find a receipt which fits his peculiar need. An alphabetical arrangement with abundant cross references makes it an easy work to consult. Those who are engaged in any branch of industry will find this book of the greatest practical value, and we especially commend it to those who are in search of an independent business, as they will find many formulæ for the manufacture of salable articles which will be worth many times the cost of the book. The Appendix contains the very latest formulæ as well as 41 tables of weights and measures, and a Dictionary of Chemical Synonyms.



Send for Full Table of Contents Mailed Free on Request

MUNN & COMPANY, Publishers

363 BROADWAY, NEW YORK

and stock market interests. In fact, the 1,064 pages of the compact and handsome volume present a greater fund of data and statistics of a practical character than any other work on such subjects; its utility being enhanced by an arrangement rendering reference to the contents of any section easy and satisfactory. The present edition also devotes much attention to the newer mining companies whose stocks have become such a feature in the stock markets of the United States, a class of organizations and securities on which full and accurate information is often difficult to obtain. It gives throughout evidence of accuracy and careful compilation and is brought down to date in its descriptive and statistical details, making the volume one which investors and all who are interested in the financial and other markets of the country cannot afford to be without.

DICTIONARY OF ENGINEERING TERMS IN ENGLISH AND SPANISH. With Indexes in Both Languages. By Andres J. R. V. Garcia. New York: Spon & Chamberlain, 1906. 4½ x 5½ inches; cloth; 150 pages. Price, \$1.

A handy technical dictionary in Spanish and English is a necessity for those who are engaged in the constantly expanding relations with the Latin-American countries. Mr. Garcia's work is furnished with an index in the two languages, lessening greatly the work of translating from Spanish into English.

LLOYD'S REGISTER OF AMERICAN YACHTS. New York: Lloyd's Register of Shipping, 15 Whitehall Street. 8vo. large; pp. 410. Price, \$7.50.

The growing of yachting in America shows itself in the steadily-increasing size of Lloyd's Register of American Yachts. The volume before us for 1907 contains over 400 pages and records the full particulars of nearly 3,500 yachts owned in the United States and Canada, the name and address of the owner of each yacht being also given. The information regarding the yachts includes the material of construction, type, rig, sail area, official number, signal letter, tonnage, length over all and on the waterline, extreme breadth and draft, name of the designer and builder, place and date of launch, and particulars of the machinery. Very handsome are the pages of the book which are devoted to the colored illustrations of private signals, of which there are 1,872, and of club burgees, 300 in number. The officers of nearly 350 clubs and yachting associations are also given.

THE ROMANCE OF STEEL. The Story of a Thousand Millionaires. By Herbert N. Casson. New York: A. S. Barnes & Co., 1907. Cloth; 376 pages, 63 portraits. Price, \$2.50.

As its title suggests, this is a popular book, dealing briefly with the rise of the iron industry in the United States, and at length with the careers and personalities of the men who have directed the wonderful expansion which followed, at first slowly, the discoveries of Kelly and Bessemer. The book contains few statistics, and those in popular form; the author is more interested in giving glimpses of the real men behind the steel. We see the men rather than the millionaires, and understand the capacities in each which fitted them to act as cogs in the great machine of the greatest American industry.

ANNUAL REPORT OF THE BOARD OF SCIENTIFIC ADVICE FOR INDIA FOR THE YEAR 1905-06. Calcutta: India Government Central Press. 8vo.; paper.

A résumé of the official scientific inquiry carried on in India.

DIE TECHNOLOGIE DER APPRETUR. EIN LEHRBUCH ZUM UNTERRICHT AN TECHNISCHEM FACHSULEN WIE ZUM SELBST-UNTERRICHT. Von Dr. A. Garswindt. Wien und Leipzig: A. Hartleben's Verlag. With 155 illustrations. 8vo.; paper bound; 317 pages.

FIRST-CLASS BATTLESHIP "CONNECTICUT"

(Continued from page 409.)

16,500 horse-power. The "Connecticut" is particularly interesting, at the present time, as having been selected as the flagship of the Pacific fleet, special accommodations for this purpose having been provided when the ship was under construction. It is also to be remembered that the "Connecticut" was built entirely at a government navy yard, contemporaneously with the construction of the "Louisiana" at a private yard. The high character of the work on the "Connecticut," and the fact that she was built in the same time as the "Louisiana," and that her extra cost, in view of the higher pay and shorter hours of government employees, was less than was expected, has established, conclusively, the ability of the government to do the very highest character of work at a reasonable cost in its own yards. The other four ships of this class differ slightly from the "Connecticut" in the arrangement of the protective deck and in the thickness of the

SPECIFY "ALLEN OR NOTHING" AT ELECTRICAL OR HARDWARE DEALERS

FOR PERFECT
SOLDER JOINTS
Allen Soldering Stick, Paste or Salts.
For Your DYNAMO

Allen Commutator Compound gives that rich gloss on your Commutator, cures Dynamo Troubles.



"AL - LECTRO"
The Perfect
POLISH

For Silver, Brass, Copper, Glass.
Not a "scratch" in a barrel of it.
"Quick as a wink."


Get the Habit

SAMPLES FREE FOR YOUR DEALER'S NAME. NO NAME—NO SAMPLE.

L. B. ALLEN CO. INC., 1335 A COLUMBIA AVENUE, - - CHICAGO

Electrical Toys for Boys

Real Scientific Novelties
Practical, Complete, Harmless, Durable.
JUST THE THINGS FOR CHRISTMAS



Every Boy a Railroad President

THERE'S great fun owning a railroad and bossing the job. Our Models of Locomotives, Trains, Trolley Cars, Dynamos, Lamps, etc., are practical and durable inventions. They amuse and instruct. They point many a boy to a useful career. Equipped with dry batteries, no acids or liquids used, perfectly safe and harmless. Prices from \$1 up.

ILLUSTRATED BOOKLET SENT FREE
THE CARLISLE & FINCH COMPANY
233 E. Clifton Ave., Cincinnati, O.
Largest Manufacturers Electrical Novelties in the World

Economy in Boiler Management

depends largely upon the method of tube-cleansing employed. The life of a boiler and its efficient service hinge on this. Chemicals loosen and partially destroy the scale—also the tubes themselves. The one proven, tried and true demolisher of scale, without any injury whatever to the tubes—which are left as good as new—is the

DEAN BOILER TUBE CLEANER

a machine that quickly loosens the scale by rapid vibration—3,000 to 5,000 taps per minute. Infinitely indicates weak spots in any tube, thus preventing possible explosions. Cleans from 10 to 30 tubes per hour thoroughly. Economical, practical, safe and sure. Used everywhere by the largest power operators. References in all countries. Over 7,000 in use. Guaranteed to pay its own cost in six months or less. Send for our free Booklet, "From Water to Steam."

THE WM. B. PIERCE COMPANY, 319 Washington Street, Buffalo, N. Y.



The dance of a tea-kettle cover gave James Watt the idea for the modern steam engine and locomotive. Millions of people had watched tea-kettle covers dance, but only one wondered about the how and why of it all. Watt reasoned it out, and his study gave him success and immortal fame. **The man who knows how and why always succeeds**, whether he discovers new forces or masters old ones.

You have opportunities for knowledge and discovery that were not dreamed of in the time of Watt, or even of your own father. Watt had to dig out for himself every least bit of knowledge that he put into the invention of the steam engine. You can get in compact, easily accessible form all the knowledge that Watt acquired from hard, tedious study, and all the knowledge that hundreds of other scientists have added to it. Watt began with the discovery of the principle of steam; **you can begin with the latest application of steam.** You will find it all, from the first principle to the latest application, in the modern

CYCLOPEDIA OF ENGINEERING

Six Volumes—Page Size 7 x 10 Inches

Published by American School of Correspondence, Chicago

the most practical, comprehensive and understandable treatise ever published on Steam Engineering and allied subjects. It is as infallible an authority in the engineering field as the Century Dictionary in the class-room, or Blackstone in the lawyer's office. The greatest authorities, the most practical experts, the best known engineers, have made this great work the model for books for home study.

LESS THAN ½ PRICE

to get men who are interested in Engineering to start home study work. **This Cyclopaedia will prove conclusively the superiority of the method of instruction of the American School of Correspondence.** We believe it will eventually bring us many enrollments in our regular courses. That's why we can afford to make this bargain offer. **We employ no agents; we send the books to talk for themselves.**

\$14.80 INSTEAD OF \$36.00

Sent Express Prepaid for Five Days' FREE Examination—If it meets your needs, send \$2.00 cash and \$2.00 a month thereafter, until you have paid \$14.80; the special price. Return at our expense, if you do not care to keep the books.

Just the right kind of help for the man who wishes to become a stationary engineer or fireman—the man who has secured his license—the electrician who works in a power plant or any mechanic or engineer ambitious to better himself.

Invaluable to the ambitious janitor who has the care of a heating system—the chauffeur or automobile owner who would save wear and tear on engines and machinery—and men in general who come in contact with steam, gas, gasoline, or oil engines.

AMERICAN SCHOOL OF CORRESPONDENCE, CHICAGO

Editor-in-chief—Louis Derr, A. M. S. B., Associate Prof., Massachusetts Institute of Technology.
Bound in half red morocco, 3,000 pages, over 2,000 illustrations, plates, diagrams, sections, tables, formulae, etc. Complete sets of test questions in every volume, thus combining the best features of a text-book and reference work

CHAPTER HEADS

Boilers, Calorimeters, Pumps, Elevators, Indicators, Valve Gears, Turbines, Compressors and Absorption Refrigeration, Steam, Gas and Oil Engines, Marine Engines and Boilers, Condensers, Navigation, Locomotive Engines and Boilers, Air Brakes, Machine Shop Work, Ventilation, Heating, Mechanical Drawing, Air Compressors, Principles and Management of Direct Current Dynamos and Motors—Electric Wiring and Lighting, Storage Batteries, Automobiles, etc.

Sci.
Am.

Dec. 7-'07

Please send

set Cyclopaedia

Engineering for

5 days' free exami-

nation. I will send

\$2 within 5 days and

\$2 a month until \$14.80

is paid; otherwise I will

notify you to send for the

books.

Name.....

Address.....


belt, which has been reduced amidships from 11 to 9 inches.

FIRST-CLASS BATTLESHIPS "IDAHO" AND "MISSISSIPPI."

The "Idaho" and the "Mississippi," building at Cramps, are smaller editions of the "Connecticut." With a length of 375 feet, a beam of 77 feet, and draft of 24 feet 8 inches, they displace 13,000 tons. On this displacement they carry four 12-inch, eight 8-inch, and eight 7-inch guns; so that their main battery is less than that of the larger ship by only four 7-inch pieces. They have two 21-inch submerged torpedo tubes, and their armor plan is practically the same as that of the "Kansas." The 3,000 tons difference in displacement between the "Idaho" and the "Kansas" shows its effect most strongly in the engine room and the speed, the horse-power being only 10,000 as against 16,500, and the speed one knot less, or 17 knots an hour. It is to be regretted that such powerful ships as these should, in this year of our Lord 1907, and in this age of 21-knot battleships, be going out to the trial course with the expectation of doing no better than 17 knots an hour.

FIRST-CLASS BATTLESHIPS "SOUTH CAROLINA" AND "MICHIGAN"

The battleships "South Carolina" and "Michigan," now being built by the Cramps and the New York Shipbuilding Company respectively, are of particular interest, because they were the first of our battleships to be designed after the conclusion of the Russo-Japanese war, and therefore embody the experience gathered during the naval operations of that great conflict. The most marked departure from the battleships which preceded them is seen in the complete elimination of the intermediate and secondary batteries which, in our earlier ships, consisted of a large number of 5-inch, 6-inch, 7-inch, or 8-inch guns. The customary number of guns in the main battery has been doubled, so that instead of four 12-inch, the new ships carry eight such guns mounted in four turrets. A numerous battery of small rapid-fire guns is retained, as a defense against torpedo-boat attack. In length and displacement the new vessels are approximately the same as the "Connecticut," though their beam is 4 feet greater and they have half a knot more speed. In general appearance they will differ greatly from any of our other battleships. The most noticeable novelty will be the four 12-inch gun turrets mounted in pairs on the axial line of the ship, two forward and two aft of the superstructure. Since the displacement of the ships was limited by act of Congress to 16,000 tons, it became necessary, in order to save weight, to reduce the freeboard of the ship by the depth of one deck (say about 8 feet) from the after end of the superstructure to the stern. The two turrets of each pair are mounted in close proximity to each other, one pair of guns being given sufficient command to fire across the roof of the turret of the adjoining pair. Experiments carried out on a full-sized scale have shown that there is no blast interference, and this being the case, all of the 12-inch guns are available for training through a maximum arc of fire of 270 degrees. It is possible to fire four guns ahead or astern, and eight on each broadside. The forward guns have a command of 24 feet and 32 feet respectively, and the after pair of 24 and 16 feet respectively. It is unfortunate that our naval constructors did not have more displacement at command, so that they could have carried the after four guns to the same height as the forward guns, and have given the ships a higher freeboard and engine power sufficient to bring their speed up to that of the latest "Dreadnought" type, say 20 to 21 knots. The armor protection has been carefully worked out, its most important element being a water-line belt 11 inches thick, 8 feet wide, and over 300 feet in length. The casemate armor above this will be nearly 300 feet long, 8 feet in width, and



Rubber Prices Drop

We are accordingly quoting greatly reduced prices on tires for 1908.


Write for new prices.

Get our booklet "Proof of the Pudding." Also catalog "E."

See us at Chicago Auto Show

The Swinehart Clincher Tire and Rubber Co.
AKRON, OHIO

New York Chicago Boston Buffalo
Detroit Minneapolis

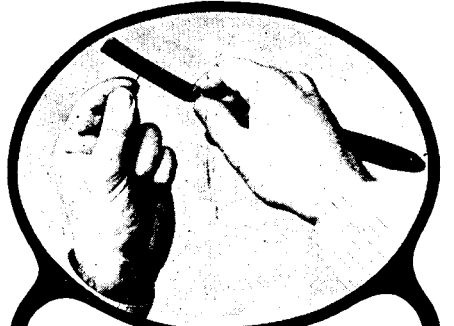

The Velvet Edge

A razor may cut a hair and yet not give a smooth shave. An edge produced by a few strokes on a Torrey Strip not only cuts the beard smoothly but leaves the skin cool and unroughed. The secret is in the

Torrey Strips

They are better than others—the Torrey way gives the quality. Our free catalogue tells all about them. If not at dealer's, sent postpaid for 50c, 75c, \$1.00, \$1.50, \$2.00 and \$2.50. If you don't like them it's money back.

Torrey's **Oil-Edge** Dressing keeps any strip soft. 15c at dealer's, or by mail. Torrey Razors are the best.

J. R. TORREY & CO., Dept. G, Worcester, Mass.



The Concrete Age Is Here

THERE'S no question about that. If you are at all interested in building a home, factory, business block or church you should think about CONCRETE—Investigate—it will pay you. Let us send you our handsome illustrated catalogue showing our HERCULES CONCRETE BLOCK MACHINES and how a real concrete building block is made and used. It is free. Address today

Century Cement Machine Co., 303 W. Main St., Rochester, N.Y.

From Sail To Steam

By Captain Alfred T. Mahan, U.S.N.

An interesting account of the change from Sail to Steam Power in our Navy, with many anecdotes and personal reminiscences. 333

Price, - \$2.25 net

HARPER & BROTHERS, Publishers

from 8 to 10 inches in thickness. With this is associated triangular athwartship armor 10 inches thick, fitted at the after end of the armor belt between the protective deck and the extension of the flat protective deck. There will be an athwartship armor bulkhead 10 inches thick, extending entirely across the ship at the forward end of the belt. Other armor bulkheads will connect with the outside casemate plating. The advantage of carrying all of the 12-inch guns on the center line of the ship is seen in the fact that the "South Carolina" and "Michigan" have the same broadside fire as the "Dreadnought," which is of more than 2,000 tons greater displacement.

THE 20,000-TON "NORTH DAKOTA" AND "DELAWARE."

By far the most important ships building for our navy to-day are the two big battleships "North Dakota," under construction at the Fore River yard, and "Delaware," now building at Newport News, Va. These ships, to use the current phrase, are the "answer" of the United States to the battleships of the "Dreadnought" type, which are being constructed for other navies. On the cover of this issue is a drawing of the "Delaware," which gives a good impression of her lofty freeboard, great length, and formidable fighting qualities. These ships are a great advance upon the "South Carolina" and "Michigan"; for in them it was possible to remedy the defects of low freeboard and low speed, while the battery is greater by two 12-inch guns and a powerful secondary battery of 5-inch pieces. Furthermore, the great displacement of these ships has made it possible to give them an amount of armor protection never before approached. The speed has been raised to 21 knots, and the bunker capacity is also very large. The system of mounting all guns on the center line of the ship, adopted in the "South Carolina" and "Michigan," has been followed, with the result that their broadside fire is twenty-five per cent greater than that of the "Dreadnought," and will probably equal that of any battleship afloat at the time they will go into commission. The ships will be 510 feet on the waterline, 85 feet 2 3/4 inches in maximum breadth, and will displace on trial 20,000 tons on a mean draft of 26 feet 10 3/4 inches. On trial they must carry 1,000 tons of coal in bunkers whose total capacity is 2,500 tons, and the speed must be 21 knots.

The "Delaware" and her sister follow the "Dreadnought" type, in having a long forecastle deck extending from the bow to about the center of the ship. The main deck, below this, has the same freeboard as the "Connecticut," or say about 20 feet. The forecastle deck has a freeboard of 28 feet. The 12-inch guns are mounted as follows: Forward is a two-gun turret, with the axes of its guns 24 feet above the waterline. Close abaft of this, with its barbettes of sufficient height for the guns to clear the roof of the forward turret, is another turret, carrying two 12-inch guns. Immediately abaft the break of the forecastle deck are two two-gun turrets, the guns of the forward pair firing over the roof of the after pair. These guns, like those on the forecastle deck, are located on the axis of the ship. Abaft is the fifth turret, so placed that its guns have a command of 24 feet above the waterline. It will be seen from this description how excellently are placed the guns of the main battery. Four of them have a command of 24 feet, four of 30 feet, and one pair, the second pair from the bow, is carried at a height of about 36 feet above the water. The battery of fourteen 5-inch guns for repelling torpedo-boat attack is mounted in broadside; two of the guns forward in the bow in sponsons, so arranged that each has a slight arc of fire across the axis of the ship. Two others are mounted astern on the gun deck, and the other ten in broadside in a central battery. The armor protection is unusually complete, superior even

SUBMARINE SIGNALS FOR SUBMARINES

SUBMARINE SIGNALS, as installed on the *Octopus* and *Cuttlefish*, are the only means whereby submarine boats can always keep in communication with their tenders, both sending and receiving such signals at distances up to five miles or more


SUBMARINE SIGNAL COMPANY

BOSTON, MASS., and LONDON, ENGLAND

BREMEN: Norddeutsche Maschinen- und Armaturen-Fabrik, Agents

The Mietz & Weiss Marine and Stationary Oil Engines

Used in the United States and Most All Foreign Navies

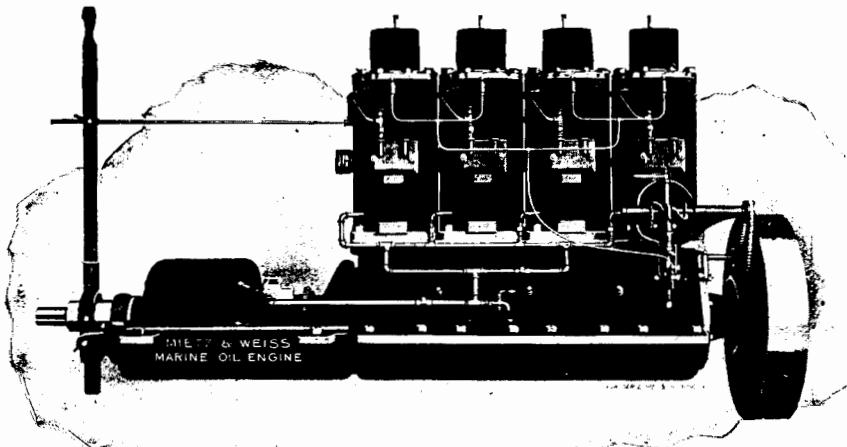


Operate on Kerosene Oil, Fuel Oil, Alcohol, Crude Oil and Distillate. Stationary, 1 to 150 horse power; Marine, 1 to 120 horse power. Over 40,000 horse power in operation. Send for catalogue.

August Mietz Iron Foundry & Machine Works, 128-38 Mott St., New York

WITTE GAS AND GASOLINE ENGINES

Positively beyond all question of a doubt, the highest type of perfection yet attained in modern gas engine construction. Every one built and guaranteed fully capable of developing horsepower claimed for it. All sizes. Horizontal type. Burns exclusively Benzolized gas, gasoline, kerosene distillate or alcohol. New features: exclusively Benzolized gas; self-cleaning electric lighter; vertical self-sealing valves; automatic wiper oilers. All parts interchangeable and adjustable. Quick deliveries. Write today for descriptive catalog "W" and prices.

WITTE IRON WORKS CO., 546 West Fifth Street, Kansas City, Mo.



NEW PAPERS ON Concrete, Reinforced Concrete, and Concrete Building Blocks

SCIENTIFIC AMERICAN SUPPLEMENT 1543 contains an article on Concrete, by Brysson Cunningham. The article clearly describes the proper composition and mixture of concrete and gives the results of elaborate tests.

SCIENTIFIC AMERICAN SUPPLEMENT 1538 gives the proportion of gravel and sand to be used in concrete.

SCIENTIFIC AMERICAN SUPPLEMENTS 1567, 1568, 1569, 1570, and 1571 contain an elaborate discussion by Lieut. Henry J. Jones of the various systems of reinforcing concrete, concrete construction, and their applications. These articles constitute a splendid text book on the subject of reinforced concrete. Nothing better has been published.

SCIENTIFIC AMERICAN SUPPLEMENT 997 contains an article by Spencer Newberry in which practical notes on the proper preparation of concrete are given.

SCIENTIFIC AMERICAN SUPPLEMENTS 1568 and 1569 present a helpful account of the making of concrete blocks by Spencer Newberry.

SCIENTIFIC AMERICAN SUPPLEMENT 1534 gives a critical review of the engineering value of reinforced concrete.

SCIENTIFIC AMERICAN SUPPLEMENTS 1547 and 1548 give a resumé in which the various systems of reinforced concrete construction are discussed and illustrated.

SCIENTIFIC AMERICAN SUPPLEMENTS 1564 and 1565 contain an article by Lewis A. Hicks, in which the merits and defects of reinforced concrete are analyzed.

SCIENTIFIC AMERICAN SUPPLEMENT 1551 contains the principles of reinforced concrete with some practical illustrations by Walter Loring Webb.

SCIENTIFIC AMERICAN SUPPLEMENT 1573 contains an article by Louis H. Gibson on the principles of success in concrete block manufacture, illustrated.

SCIENTIFIC AMERICAN SUPPLEMENT 1574 discusses steel for reinforced concrete.

SCIENTIFIC AMERICAN SUPPLEMENTS 1575, 1576, and 1577 contain a paper by

Philip L. Wormley, Jr., on cement mortar and concrete, their preparation and use for farm purposes. The paper exhaustively discusses the making of mortar and concrete, depositing of concrete, facing concrete, wood forms, concrete sidewalks, details of construction of reinforced concrete posts, etc.

SCIENTIFIC AMERICAN SUPPLEMENT 1586 contains a review of concrete mixing machinery by William L. Larkin.

SCIENTIFIC AMERICAN SUPPLEMENT 1583 gives valuable suggestions on the selection of Portland cement for concrete blocks.

SCIENTIFIC AMERICAN SUPPLEMENT 1581 splendidly discusses concrete aggregates. A helpful paper.

SCIENTIFIC AMERICAN SUPPLEMENTS 1595 and 1596 present a thorough discussion of sand for mortar and concrete, by Sanford E. Thomson.

SCIENTIFIC AMERICAN SUPPLEMENT 1586 contains a paper by William L. Larkin on Concrete Mixing Machinery, in which the leading types of mixers are discussed.

SCIENTIFIC AMERICAN SUPPLEMENT 1626 publishes a practical paper by Henry H. Quimby on Concrete Surfaces.

SCIENTIFIC AMERICAN SUPPLEMENT 1624 tells how to select the proportions for concrete and gives helpful suggestions on the Treatment of Concrete Surfaces.

SCIENTIFIC AMERICAN SUPPLEMENT 1634 discusses Forms for Concrete Construction.

SCIENTIFIC AMERICAN SUPPLEMENT 1639 contains a paper by Richard K. Meade on the Prevention of Freezing in Concrete by Calcium Chloride.

In **SCIENTIFIC AMERICAN SUPPLEMENT** 1605 Mr. Sanford E. Thompson thoroughly discusses the proportioning of Concrete.

SCIENTIFIC AMERICAN SUPPLEMENT 1578 tells why some fail in the Concrete Block business.

SCIENTIFIC AMERICAN SUPPLEMENT 1608 contains a discriminating paper by Ross F. Tucker on the Progress and Logical Design of Reinforced Concrete.

Each number of the Supplement costs 10 cents. A set of papers containing all the articles above mentioned will be mailed for \$3.40

Order from your Newsdealer or from

MUNN & CO., PUBLISHERS, 361 BROADWAY, NEW YORK CITY

to that of the "South Carolina" and "Michigan." The belt is 11 inches thick by 8 feet in width, and above it the side of the ship is protected by a secondary belt 7 feet 3 inches wide and 10 inches thick. These two belts afford a reasonable assurance of the maintenance and stability of the ship under battle conditions. Above the main casemate armor, amidships, the side is protected by 5-inch armor, behind which are mounted ten of the 5-inch guns. This armor also affords protection to the bases of the smoke-pipes. The percentage of weight allotted to hull and armor in these ships is considerably greater than the percentage of such weights allotted to similar purposes in the largest battleship now afloat. The contract speed is 21 knots, and this is to be obtained in the "Delaware" by reciprocating engines, and in the "North Dakota" by turbines of the Curtis type.

WARSHIP TONNAGE OF THE PRINCIPAL NAVAL POWERS.

(Continued from page 414.)

what is, after all, the most important point of all, namely, the personnel. It is not so much the gun as the man behind the gun that determines the issue. It is not so much the speed and cruising radius of the ships, or the judicious emplacement of their batteries, or their handy maneuvering qualities, that determine the issues of a campaign, as it is the efficiency, prudence, dash, and all-round genius of the officers who fight the ships. Moreover, in order to get the best results out of a fleet, not only must the personnel be of the highest efficiency, but it must be sufficiently adequate in numbers; for modern wars have shown that, in the wear and tear of a bitterly-fought conflict, there is nothing that calls for a larger reserve than the personnel, both officers and men. Hence, the great significance of the comparison of the personnel shown on the accompanying diagram. The results are striking, and certainly, for the United States, very disconcerting. Although in the number and displacement of our ships we stand second on the list, in the number of enlisted men we stand last; far below Japan, whose total tonnage is not more than about sixty per cent of our own. With a total tonnage of 611,616 against Japan's tonnage of 374,701, we have only 18 flag officers against Japan's 55; 182 captains and commanders, against Japan's 245; 751 other line officers and engineers, against Japan's 1,751; and 34,062 enlisted men, against Japan's 41,070, Germany's 42,400, France's 51,926, and England's 98,973 enlisted men.

THE UNITED STATES NAVAL ACADEMY.

(Continued from page 415.)

curing. The baseball and football games of the midshipmen are of intense interest to the officers. For exercise there is golf and tennis, and some ride. All in all, it is a pleasant, interesting life.

MIDSHIPMEN: APPOINTMENT AND ENTRANCE.

Appointments to the Naval Academy are made by representatives and senators, and to a very limited extent, by the President. Presidential appointments are generally given to the sons of army and naval officers. Sometimes congressional appointments are given in accordance with the results of competitive examinations, but not generally.

For appointment the candidate must be between sixteen and twenty years old. Physically he must be free from any chronic defect. Mentally he must pass an examination in grammar, geography, United States history, world's history, arithmetic, algebra, and geometry, so severe that half of the candidates fail.

THE ORGANIZATION OF THE MIDSHIPMEN.

The midshipmen are organized as a naval brigade. The purpose of this is twofold. First it gives a perfect control individually over each one of the eight hundred and fifty midshipmen. Collegians live pretty much as they please and how they please, and come and go as they may desire. They elect to take

"Star" Lathe For Fine, Accurate Work
Automatic Cross Feed
Send for Catalogue B.
SENECA FALLS MFG. CO.
695 Water Street,
Seneca Falls, N. Y., U. S. A.

Engine and Foot Lathes
MACHINE SHOP OUTFITS, TOOLS AND SUPPLIES. BEST MATERIALS. BEST WORKMANSHIP. CATALOGUE FREE
SEBASTIAN LATHE CO., 120 Culvert St., Cincinnati, O.

THE CLIPPER CLIP
Its triangular shape prevents entangling and gives three times the capacity of any other clip for attaching papers together.
Best & Cheapest. All Stationers.
CLIPPER MFG. CO.,
401 West 124th St., New York, U.S.A.
Send 10c. for sample box of 100; or 20c. for clips and desk tray.

The Lambert 18 "Friction Flyer"
\$800.00
Write for catalogue describing our full line
THE BUCKEYE MFG. CO. Anderson, Indiana

B. F. BARNES ELEVEN-INCH SCREW CUTTING LATHE
For foot or power as wanted. Has power cross feed and compound rest. A strictly high grade, modern tool. Ask us for printed matter. Descriptive circulars upon request.
B. F. BARNES CO.
Rockford, Ill.
European Branch, 149 Queen Victoria St., London, E. C.

BARKER MOTORS
Reliable.—1 1/4 to 10 H. P.—Economical
Their perfect operation and reliability are due to common sense mechanical ideas and good construction. While low in price, they are made of best materials with careful attention to details.
G. L. BARKER, NORWALK, CONN.

Motors
for airships and other purposes where light and powerful engines are required.
1 to 40 H. P. Air Cooled.
50 & 100 H. P. Water Cooled.
Adopted by War Department. Send for catalogue B.
G. H. CURTISS MANUFACTURING CO.
Hammondsport, N. Y.

WORK SHOPS
of Wood and Metal Workers, without steam power, equipped with **BARNES' FOOT POWER MACHINERY** allow lower bids on jobs, and give greater profit on the work. Machines sent on trial if desired. Catalogue Free.
W. F. & JOHN BARNES CO.
Established 1872.
1999 RUBY ST. ROCKFORD ILL.

FREE College Course in Watch Repairing
To establish myself in your locality, I will help ambitious young men of good habits to start a jewelry business within 3 months after beginning my personal instructions. My time and instructions, all books, charts, diagrams and pictures necessary to complete the full course are absolutely free. If you are alert and worthy of a successful future, write for full particulars and Lesson 12 test. They cost you nothing.
CHAS. F. ELMORE, Principal
Correspondence School of Watch Making
Rogers, Thurman & Co., Props. 57 Michigan Ave., Chicago.

WORK BENCH—the best made. Improved iron vises, steel legs. Built up maple top. 20 in. wide, length 3 ft. 8 in., one vise \$6.25; two vises \$7.50. 20 in. wide, length 4 ft. 6 in., one vise \$6.75; two vises \$8.00.
COLUMBIA SCHOOL SUPPLY CO., Indianapolis, Ind.

STUDY High-Grade Instruction by LAW Correspondence
Established 1892
Prepares for the bar of any State. Three Courses: College, Post-Graduate and Business Law. Improved method of instruction, combining theory and practice.
One student writes: "I have learned more law in three months under your instruction than I learned in six months in a law office."
APPROVED BY BENCH AND BAR
Classes begin each month. Uniform rate of tuition. Send for our 48-page catalogue, in which we give a synopsis of the rules for admission to the bar of the several States.
Chicago Correspondence School of Law
506 Reaper Block, Chicago

A Home-Made 100-Mile Wireless Telegraph Set

Read Scientific American Supplement 105 for a thorough, clear description, by A. Frederick Collins, of the construction of a 100-mile wireless telegraph outfit. Numerous, adequate diagrams accompany the text. Price 10 cents by mail. Order from your newsdealer or from

MUNN & CO., 361 Broadway, New York

certain studies, and later cut lectures if they so please, and are not required to give a very complete account of themselves. But the eight hundred and fifty midshipmen at Annapolis all go to bed at the same time, ten o'clock, and get up at the same time, six o'clock. They all live in rooms exactly alike, with furniture after the same pattern. They march to and from meals together, to and from recitations together. Should a midshipman be absent from any assembly or formation where he is due, it will become known instantly, and the cause of his absence will be ascertained. At any one time all midshipmen will be dressed exactly alike; if one midshipman is wearing rubber overshoes, all will be. Midshipmen of one class all study exactly the same lessons each day, and recite on them in the same periods. Study hours and recitations occupy the midshipman until half-past three, and drills take place between 3:40 and 5 P. M. On a particular day twenty different kinds of drills may be going on in all of the different departments. In light of the foregoing, it is seen that a most intimate personal control of each midshipman is necessary, and their organization into a naval brigade effects this. If there was not this intimate control, if there was not a complete hold on each midshipman all of the time, there would be lost an incalculable amount of time if nothing else.

But there is something else this organization effects; as previously said, its purpose is twofold. This second purpose is the effect upon the character of these young men. Each midshipman must constantly every day account for himself to some one higher up in authority than himself. Unconsciously he acquires the habit of taking great pains to learn what his exact duties and responsibilities are. As a midshipman he learns the meaning and necessity of regulations and discipline. When he enters these terms have no more meaning to him than are obtained from dictionary definitions. He is then bewildered with the multiplicity of rules that regulate his life. He learns their necessity by hard knocks, by punishment for ignorance or violation of them. When he graduates, four years later, these regulations are part of his being, his whole personality is saturated with them. He then reports aboard ship and finds the same spirit controlling the ship that he had become so used to. As a result he instantly feels at home, he knows the regulations that control his own action, and he knows how to apply and enforce the regulations upon the enlisted men that come under his authority.

A most important quality required of the naval officer is the habit of command. This can never be learned from books, and the man who can successfully command must also know how to obey. The four years' life of the midshipmen at Annapolis is a life of obedience. In the last year, in addition, the midshipman begins to acquire the habit of command; under the direction of the commandant and his assistants, the discipline officers, the brigade of midshipmen is officered and controlled by the senior classmen. And so perfectly is this done in spirit and practice, that the authority of cadet officers is no more questioned by the midshipmen than is the authority of the officers aboard ship by enlisted men of the crew.

The brigade is commanded by the cadet commander. It is divided into two battalions, each commanded by a cadet lieutenant commander. Each battalion is composed of six companies, commanded by cadet lieutenants, assisted by cadet junior lieutenants, and cadet ensigns. The companies are further divided into crews, commanded by cadet petty officers. Each of the cadet officers has particular and responsible duties in connection with the midshipmen under his direct orders, and the sequence of authority is swift and certain.

The brigade of midshipmen is, under the commandant's direction, a self-controlled body. A discipline officer is al-

Jaeger UNDERWEAR
SANITARY
FOR Men, Women and Children
IT IS PURE
IT IS POROUS
IT IS PROTECTIVE
IT IS
All Wool in all Weights and All Weights for all Wants
Write for samples and booklet of particulars.
Dr. Jaeger's S. W. S. Co.'s Own Stores
New York: 306 Fifth Ave., 22 Maiden Lane.
Brooklyn: 504 Fulton St. Boston: 228 Boylston St.
Phila.: 1516 Chestnut St. Chicago: 82 State St.
Agents in all Principal Cities

Little Giant GASOLINE MOTORS
Reliable, Reversible, Two Cycle. Two and Three Port. Guaranteed for one year. Simple and easy to operate. Our Free Catalog A-3 is worth your having.
Send 10 cents in stamps for our book entitled "Ignition, Vaporization, Installation and Operation of a Gasoline Motor."
UNITED MFG. CO., - - Detroit, Mich.

Tools! Tools! Tools!
and all you want to know about them. Our Tool Catalogue No. 22 is a cloth-bound book of 950 pages. If you want to "know it all" about Tools you should send for this book at once. Sent post-paid on receipt of \$1.00 which will be refunded from your first purchase from us of \$10.00 or over.
MONTGOMERY & CO.
105 Fulton Street, N. Y. City

ELECTRICAL APPARATUS REPRESENTED BY CONVENTIONAL DIAGRAMS IN DRAWINGS.—Fifty diagrams showing the usual method of illustrating electrical apparatus in drawings. A labor saving paper contained in SUPPLEMENT 1106. Price 10 cents. For sale by Munn & Co. and all newsdealers.

Straight Legs
Positively trim, stylish, straight-line effect with our Pneumatic Forms. Sent on Approval. Unseen, unfelt, inexpensive, durable. "A marvelous invention." Also, without charge, exercises to give shape, force, action to the legs. Book, proofs and chart sent free under plain letter seal.
THE ALISON CO.
Dept. 62 Buffalo, N. Y.

PURE AIR AT LOW COST
"Ozone" Window Ventilator
Equal in service to the Best, at One-Half the Cost. Approved by Leading Architects. Send for full details and Price List.
INTERNATIONAL MOULDING COMPANY
Chicago: 31st and Morgan Sts.
New York: 103 Chambers St.
Philadelphia: Builders' Exchange

Would You "Make the Round Trip" Without Uncertainty?
Investigate the **Hildreth Marine Motors**
We are ready to **"SHOW YOU"**
Send for valuable facts about Marine Motors.
THE HILDRETH MFG. CO.
709 Sheridan, Lansing, Mich., U.S.A.

THE "LEADER."
1 1/2 H. P. Gasoline Auto-Marine Engine
Built like a watch. Beautifully Finished. Accurately Constructed. Light, Strong, Reliable, and Noiseless in operation. Suitable for launches from 15 to 19 feet in length. Price complete, \$75 net, no discount. Thoroughly guaranteed. Perfect Speed Control. Complete descriptive Catalog upon application. Manufactured by
CLAUDE SINTZ,
292 S. Front St., Grand Rapids, Mich.

You cannot fail to make money with the assistance of our complete **One Light System**, in case \$10.
"THE LIGHT THAT NEVER FAILS." U. S. Systems approved by the Board of Underwriters. Simple, safe and durable. Write for catalogue illustrating our full line.
NATIONAL STAMPING AND ELECTRIC WORKS
150-158 S. Jefferson St., Chicago, U. S. A.

Kerosene Oil Engines
Marine, Stationary, Portable
NO DANGER. Maximum Power. Lightest Weight. Simple. Reliable. Economical. No Batteries. Self Ignition by Compression. Fully guaranteed. Write for Catalogue S. A. No charge for packing.
INTERNATIONAL OIL ENGINE CO.
38 Murray St., New York, U. S. A.

ways present at the different formations, but he is never required to do more than give an order in a quiet tone to the senior midshipman present.

In carrying out inspections, in enforcing regulations and reporting infractions thereof, the discipline officers are always assisted by the cadet officers. It is the hearty co-operation of these that is depended on, and that counts much toward sustaining the high standard of duty and honor that animates the brigade collectively and midshipmen individually. This co-operation exists and is effective, and the writer is glad to record his appreciation of the earnest efforts of these splendid young officers.

STUDIES.
Instruction at Annapolis is given on the personal recitation system. Each class is divided into sections of about ten men each. There are three one-hour recitations each day. With so few in a section, each midshipman gets much personal instruction.

The first two years' book work is not naval in character. It is principally composed of mathematics, but also includes the study of rhetoric, naval history, physics and chemistry, mechanical drawing, and French and Spanish. As far as these studies are concerned, they might be pursued in any educational institution, perhaps with as good results as at the Naval Academy. This preliminary mental training is necessary before the work in the professional scientific branches is commenced. But outside of these studies in the first two years of his course, the midshipman has invaluable training in the various daily drills, in naval organization, and in the naval spirit and discipline that envelop him.

In the last two years the studies are entirely professional. The time is devoted to seamanship, navigation, marine and electrical engineering, ordnance and gunnery, naval construction, and kindred subjects. The different department drills keep pace with the subjects taught in the class rooms, and as far as possible are allied to them.

DRILLS.
The scheme of the practical exercises is planned with reference to the class the midshipman is in. As a fourth-class man he will be a rear-rank private, pull an oar in a boat, haul on ropes and personally furl sail, occupy the most unimportant great-gun station in a turret, and fill an ordinary seaman's billet on the summer practice cruise. As a first-class man he will occupy a position of responsibility in these drills, will receive instruction himself and at the same time will assist in instructing the lower classmen. These drills are of great variety. The purpose is that when a midshipman is graduated and sent to a cruising ship, he will himself have performed every kind of work required of the enlisted man, and thus he can instruct the latter. The drills are in dancing, boxing, fencing, building and managing steam and electric machinery, target practice with small arms and great guns, artillery, infantry, torpedoes, signals, tactics, boat sailing and rowing, and seamanship, both in steam and sailing vessels. Modern war vessels take the midshipmen on an ocean-going practice cruise each summer, where each midshipman is initiated and practised in duties suitable to his state of progress. As a senior classman he will have the duties of a ship's officer.

PRIVILEGES AND CUSTOMS.
Privileges depend upon class rank and conduct. The first-class man has freedom of liberty to Annapolis to a greater extent than is accorded the fourth-class men. Midshipmen are graded in one month according to the number of demerits assigned the previous month. There are three conduct grades. A midshipman receives fifty demerits if he wears non-regulation clothes, and would receive fewer for a less serious offense, three for instance for being late to formation.

Midshipmen are much influenced by class sentiment. Speak unkindly of a

SORE THROAT

To prove the Efficiency of

Hydrozone

to Sore Throat Sufferers, I will send **One 25 Cent Bottle Free** to anyone mentioning this paper and sending 10 cents to pay postage and packing. Hydrozone is a harmless germicide, indorsed and successfully used by leading physicians. Not genuine without my signature on label. Ask for Booklet on Treatment of Diseases. Sold by Leading Drug-gists.

Charles H. Hargrave

Chemist and Graduate of the "Ecole Centrale des Arts et Manufactures de Paris" (France)

Dept. U, 63 Prince Street, New York

\$1.00 THE "READY" The "Ready" is the only instrument made with which you can take measurements and draw sketch of any mechanical layout. Graduated in 10ths, 20ths or Metric Units. It's a practical tool in every way. You can carry it in your vest pocket. Send us your name and we will tell you more, or send money Order today. You need the Ready.

READY MANUFACTURING CO.
Dept. A, Rochester, N. Y.

Build It Yourself

Any boy or amateur can build this perfect little 1 H. P. vertical, 2 cycle gasoline engine on a foot power lathe from rough castings by following our simple blue print working drawings. Others are doing it, so can you. No engine equals it for simplicity, strength and durability. Fills every requirement where light motive power is needed. Write for booklet and prices on castings and finished engines.

GARDNER MOTOR COMPANY
5011 Delmar Ave., St. Louis, U. S. A.

Keystone Well Drills

for Artesian and Ordinary Water Wells; Mineral Prospecting and Placer Testing for Oil and Gas; Deep Drilling for Oil and Gas; Contractor's Blast Hole Drilling; River and Harbor Exploration, etc. Our five catalogs are text-books on these subjects.

KEYSTONE WELL WORKS
Beaver Falls, Pa.

New York Office, 170 Broadway

LENSES

Besides making all kinds of PHOTOGRAPHIC LENSES we manufacture to order lenses of every description, including stereoscope, surgical instrument, lantern lenses, magnifying mirrors, etc. Write for estimates and samples. We make 35 different styles and sizes of PHOTOGRAPHIC SHUTTERS and our factory is especially equipped to manufacture fine small metal articles of all kinds, furnishing the dies if desired. Estimates on application.

Wollensak Optical Co., 292 Central Ave., Rochester, N. Y.

THE UNDERWOOD STANDARD TYPEWRITER

PLACED WITHIN YOUR GRASP
TAKES CARE OF EVERY CLASS OF WORK

DEMANDED BY MODERN BUSINESS

BY CONDENSED BILLING
RETAIL BILL & CHARGE
UNIT BILL AND ORDER
COMBINATION

AND ON THE OTHER HAND
THERE ARE MANY FEATURES THAT WARRANT INVESTIGATION

UNDERWOOD TYPEWRITER COMPANY
NEW YORK OR ANYWHERE

BANKING BY MAIL

NAVY AND ARMY MEN

We number among our depositors many of your associates in all parts of the world and invite you to send for full information, telling the manner in which they allot their salary to this large, safe bank, no matter where they are located.

4 PER CENT INTEREST

Compounded twice a year, paid on any amount

Ask for booklet "S.A." explaining our system of Banking by Mail.

THE CITIZENS' SAVINGS & TRUST COMPANY
CLEVELAND, O.
The Oldest and Largest Trust Co. in Ohio.
Capital and Surplus \$54 Million Dollars.

class, and every member of it is hurt and indignant. Appeal in any particular case to the better feeling of a class, and the entire class will respond as one man. Class customs are handed down to posterity. To-day peculiar sentiments exist that were in vogue over twenty years ago, to the writer's knowledge, and undoubtedly long before that.

Relaxation takes the form of outdoor sports and athletics of all kinds. There are track meets of running and jumping, throwing the hammer and vaulting. Baseball, football, tennis, basket ball, and other contests occur.

The midshipmen have their glee club, and most years during the winter give a minstrel show and musical performance, to which officers and their families are invited.

It is an exacting, but withal a joyous, interesting life. On an average, but fifty to sixty per cent of those who enter are graduated. The rest, failing in some way to give satisfaction, are dropped in the different years as the class progresses.

The sentiment is that a midshipman must be a gentleman in all that the word implies. This is the obligatory standard of life that exists among these young men.

The training in all respects is entirely controlled by naval officers. As these officers are constantly fresh from sea service, it means that the Naval Academy preparation reflects the ideas of the naval service at large.

SIMPLE EXPLANATION OF MODEL BASIN METHODS.

(Continued from page 420.)

the model of a submerged strut, for example, might be negligible, while eddying around the full-sized strut of the actual ship would be serious. In the first case, the law of comparison would apply for practicable speeds. In the second place, it would not apply except as a rough approximation. As, however, eddy resistance is not a large proportion of the residuary resistance, and as the law of comparison applies fully to a portion of the eddy resistance and with fair approximation to the remainder, we are warranted in relying fully upon the law of comparison as regards residuary resistance. It is probably more reliable in the determination of the residuary resistance of a full-sized ship than the methods we must use for estimating its frictional resistance.

It is in connection with propellers that the law of comparison becomes an unsafe guide. It is easy to make experiments with model propellers in a model basin and to apply the law of comparison to the results for the purpose of determining the thrust and power of full-sized propellers. This method has given good results in some cases and in other cases has failed, and the law of comparison has been sometimes discredited on this account. As a matter of fact, the fault is not with the law of comparison, but with the wrong use of it. A 12-inch model propeller with its center, say, one foot below the surface is working under a head of about 33 feet due to the atmosphere and one foot due to its submergence, or 34 feet in all. A 12-foot propeller submerged correspondingly 12 feet below the surface is working under a head of 33 feet due to the atmosphere plus 12 feet due to submergence, or 45 feet in all. The head under which it should work to correspond accurately with the model propeller would be 12 x 34, or 408 feet. The law of comparison should not be applied unless the conditions are such that it is applicable. It happens, however, that for moderate thrusts and speeds the motions around the model propeller and the full-sized propeller, in spite of the fact that they do not work under the proper relative heads, are essentially similar, and the ultimate reactions being due not to the pressures but to the motion given the water, the law of comparison does reasonably apply.

When, however, the full-sized propeller

XMAS GIFTS Diamonds on Credit

For Christmas Presents the Loftis System is a great convenience. It enables you to make beautiful and valuable gifts without the outlay of much ready money. A small cash payment, and you can give a "loved one" your choice of the finest diamonds, watches and other articles of high grade jewelry. **MAKE YOUR SELECTIONS NOW** from our Xmas catalog. We will send them, with all express charges paid, for your inspection. If you like them, pay one-fifth on delivery; balance in 8 equal monthly payments. Write for Xmas Catalogue Today.

LOFTIS Old Reliable. Original Diamond and Watch Credit House.
LOFTIS & CO. Dept. P. 180, 62 State St., Chicago, Ill.

A MECHANICAL PERFECTION IS THE STARSAFETY RAZOR

which has been tested and tried out by over five million users all over the world. It does its work with safety, comfort and dispatch.

The blades are **forged and full concaved** similar to the ordinary razor blades. With proper care they will **last a lifetime**. They should be stropped occasionally to produce the best results in shaving.

The **STAR SAFETY RAZOR** is guaranteed to meet the requirements of the heaviest beard and will not irritate the tenderest face. Easily adjusted, simple in handling, takes no time to clean the instrument after shaving.

This razor may be inspected at any cutlery store. If you purchase a **STAR SAFETY RAZOR** you will own the best razor of its kind on the market.

Star Razors are sold in sets from \$1.50 and up; with the automatic Stropping Machine and strop, \$4.50 a set. These Safety Razors are sold all over the world by all dealers who handle cutlery.

THE STAR SAFETY CORN RAZOR

Simple, Safe and Sure, on sale by all dealers, or will be sent you from our factory on receipt of \$1.00. Both of the above articles make useful, handsome and valuable holiday gifts, and as the Christmas season approaches consider the advisability of purchasing the **Star Safety Razor** and the **Star Corn Knife** for relatives or friends.

★ **KAMPFE BROS., 12 Reade Street, New York** ★

'Ever-Ready' Safety Razor \$1.00

GUARANTEED best of all safety razors. Complete for \$1.00 with silver nickel frame—12 Ever-Ready blades, handle and blade strop, attractively cased. Extra blades 10 for 50 cents, which also fit Gem and Star frames. Ten new Ever-Ready blades exchanged for ten dull ones and 35 cents. On Sale Everywhere. Mail orders prepaid \$1.00.

American Safety Razor Co., 320 Broadway, New York

12 BLADES With Every Set

The ARDREY Vehicle Washer
Pat. Aug. 15, 1905

Washes Carriage and Auto Perfectly. Easily attached to hose. Won't scratch varnish. No splashing of water. Dry hands. Dry clothes. Solid brass \$3.00. Booklet free. **ARDREY VEHICLE WASHER CO.** 181 Y. Main Street, Rochester, N. Y., U. S. A.

RADIUM AND THE RADIO-ACTIVE Substances. No better or clearer scientific account has been published than that contained in SCIENTIFIC AMERICAN SUPPLEMENT 1429. The paper presents all that is at present known about radium and the radio-active substances. Price 10 cents, by mail. Munn & Co., 361 Broadway, New York City and all newsdealers.

DYNAMO-ENGINE 14 SETS. FUEL-GAS, GASOLINE, ALCOHOL. H.P. NOW, DO IT.

10 AND 20 LIGHTS

Buffalo Mechanical and Electrical Laboratory
143 Erie County Bank Bldg., Buffalo, N. Y., U. S. A.

National

"The All-Ball-Bearing Car"

Two 4-Cylinder and Two 6-Cylinder Models
For 1908

Touring Cars, Limousines and Roadsters

Each equipped with **National Ball-Bearing Motors**. The new models embody all of the tried and proven features of **National Construction**, refined and perfected in all details, to the highest possible degree.

National Model K—4-cyl., 4 1/2 x 5
" N—4-cyl., 5 x 5
" R—6-cyl., 4 1/2 x 4 1/2
" T—6-cyl., 5 x 5

See our exhibit at Chicago Show, November 30th to December 7th.

WRITE FOR PARTICULARS.
NATIONAL MOTOR VEHICLE CO., 1019 E. 22nd St., Indianapolis, Ind.

MILLS FOR ALL MATERIALS.

OUR BUSINESS IS TO MAKE MACHINERY FOR GRINDING, CRUSHING, CRACKING AND PULVERIZING ALL HARD SUBSTANCES. WE HANDLE ALL KINDS OF MATERIALS FROM COTTON-SEED TO ROOTS AND HERBS. BY AN UNEQUALLED PROCESS, IF YOU WANT ANY KIND OF A MILL OR GRINDING MACHINE, COME TO US AND YOU WILL GET THE BEST AND STILL SAVE MONEY.

DEAL WITH US ONCE AND YOU WON'T CHANGE.
ESTIMATES FREELY FURNISHED.
SPROUT, WALDRON & CO.
SEND FOR CATALOG NO. 4. **MUNCY, PA.**

Gas Operating

THE JEWELL STILLS
(Patented in the U. S. and Foreign Countries.)

For Drinking Water and Technical Use
PURE WATER H₂O

They operate automatically—delivering the distilled water cold, aerated, palatable, crystal clear and germ proof.

Homes, Apartments, Office Buildings, Hotels, Schools, Clubs, Hospitals, etc., have installed them. Saves expense of buying bottled waters. Made any capacity.

Your architect has full details—See Sweet's Index, November 1st, 1907, or write us.

We also manufacture water softening and filtering apparatus for industrial and municipal use.

JEWELL WATER IMPROVEMENT CO., 118 W. Jackson Boulevard, CHICAGO

Steam Operating.

STAR RUNABOUTS

3 Models—\$500, \$600, \$700

The nobbiest little cars on the market. Beauty, Simplicity, Ample Power, Perfect Control, and Low Cost of Maintenance make them the Ideal Car for business, professional or pleasure uses. Flexibly built to withstand hard usage on rough roads in city or country. Have three-point spring suspension, pneumatic tires, shaft drive and many other good points. Let us tell you about them. Fine selling proposition for agents. Good territory still open. Special bodies for business purposes.

STAR AUTOMOBILE CO., 303 Dearborn St., Chicago

Model A—\$500

Classified Advertisements

Advertising in this column is 50 cents a line. No less than four nor more than ten lines accepted. Count seven words to the line. All orders must be accompanied by a remittance. Further information sent on request.

BUSINESS OPPORTUNITIES.

LOCAL REPRESENTATIVE WANTED.—A large income assured to anyone who will act as our representative after learning our business thoroughly by mail. Experience unnecessary. All we require is honesty, ambition and willingness to learn a lucrative business. No soliciting or traveling. An exceptional opportunity for those desiring to better their conditions and make money. For full particulars write nearest office for free book No. 378 National Co-operative Realty Co., Athenaeum Building, Chicago, Ill. Marden Building, Washington, D. C., Phelps Building, Scranton, Pa.

FRANCE.—Do you want to do business with France? I am contractor to the principal European Railway Companies, and have an important connection among the great constructors, engineers, mines, and automobile makers. I can introduce a suitable specialty. Have you one? No antiquities required. Would undertake agency of first-class high-speed machine tools for heavy cuts. Only sound firms treated with. Established 10 years in Paris. Best references given and required. Address Machinist, care of The Gallian Library, 224, Rue de Rivoli, Paris (France).

WANTED.—Good article to manufacture and sell on royalty, or sales agency for same; have facilities; best references. "P" 503, New England Building, Cleveland, Ohio.

DOMINOCARDS. Great composite game set; domino shape with card colors. Play cards, dominoes and new games "Show-me" and "Big-stick." Parents fascinated, children delighted; unique Xmas present; 56 parts in attractive box postpaid 50c. Order to-day. Domino-cards Co., 1300 Chouteau, St. Louis, Mo.

QUICK SALES IS MY MOTTO.—U. S. Pat. 854,257. May 21, 1907. Electric Heater, also patented 11-cent kitchen specialty. \$1,000 each. F. Tobler, 1787 Hayes Street, San Francisco, Cal.

GENTLEMAN desirous of getting into the Automobile business can make a very profitable investment of \$500 to \$1,000 dollars and obtain good paying position if competent. Automobile Sales Corporation, 1661 Broadway, New York.

ARE YOU a young man interested in electrical research? So learn the use of time and money for experiments drop me a line. For further information and full particulars address Inventor, P. O. Box 18, Brooklyn, New York.

INVENTORS.—Send for free sample copy "World's Progress," devoted to interests of inventors. All latest developments in scientific and industrial world. World's Progress, 510 12th St., Washington, D. C.

AGENTS WANTED in every county to sell the Transparent Handle Pocket Knife. Good commission paid. From \$75 to \$300 per month can be made. Write for terms. Novelty Cutlery Co., No. 2 Bar St., Canton, O.

PATENTED KEROSENE INCANDESCENT BURNER. 70 candle power, used on any lamp; saves 50 per cent. kerosene. Ready seller everywhere. Exclusive territory. Write for particulars. F. C. Gottschalk, 265 Broadway, New York.

PATTERN LETTERS AND FIGURES (White Metal and Brass) for use on patterns for castings. Large variety, prompt shipments. Send for catalog. H. W. Knight & Son, Seneca Falls, N. Y.

THOUSANDS IN USE throughout the world. \$15.00 "Gem" Adding Machine, very compact, elegant side line. Special offer to high grade agents. Automatic Adding Machine Co., Dept. 4, 332 Broadway, New York.

START A NEWSPAPER IN SOME LIVE TOWN. Good money in it for a hustler. Cost \$5.00 weekly. I will tell you how to do it. G. Tunison, 15 Vandewater Street, New York.

PATENTS FOR SALE.

FOR SALE. American patent rights on Reinforcing Bar for concrete construction. Patent No. 857,071. For full particulars address A. V. Reyburn, Jr., 13 Hortense Place, St. Louis, Mo.

FOR SALE.

ENGINEER'S TACHYMETER FOR SALE. One Buff & Berger combined engineer's transit and level. In fine condition, has been used about three weeks. Includes plumb bob, magnifying glass, steel and linen tops. Price \$180. W. E. Koch, Whitehall, N. Y.

HELP WANTED.

The following positions are open in our new Gas Engine Works:

SALES MANAGER to look after the wants of, and obtaining agencies. An office man of large calibre, pleasing personality, fine correspondent, one who can obtain and hold large agencies. Salary \$1,200 to \$2,400 per year, also interest in a highly profitable business after worth is demonstrated. Witte Iron Works Company, Kansas City, Mo.

SUPERINTENDENT for works of 30,000 feet floor space, to operate two hundred hands. Want not less than two thousand engines per annum, 3 to 40 H. P. at lowest possible cost, factory equipment the very best and latest. Must be an organizer of men, and a systemizer of large experience. Salary \$1,500 to \$2,400 per year, and interest in business also. Witte Iron Works Company, Kansas City, Mo.

CHIEF CLERK, experienced in checking in and outgoing invoices, doing some buying and repair order man. Salary \$85 to \$100 per month. Witte Iron Works Company, Kansas City, Mo.

STOCK CLERK, a competent inspector of work entering stock room, who can pass on its grade, properly take care of it, receive shipments, etc., previous experience expected. Salary \$100 per month. Witte Iron Works Company, Kansas City, Mo.

DRAFTSMEN WANTED.—Looking for opportunities to advance or to get off the board. Positions open. Twelve offices. Write to-day, stating experience. Hapgoods, 30 Broadway, New York.

ROYALTY SALESMAN WANTED to travel and place manufacture and sale on royalty of splendid household article. Right man can clear \$10,000 in a few months. Address X.X., Box 773, New York.

TYPEWRITERS.

START MAKING MONEY by buying a reliable rebuilt typewriter. Remingtons, \$15; Hammonds, Calligraphs, Williams, Bickensederfers, Franklins, \$10 up. Rentals, repairs. "Atlantic" Typewriter Ex., Dept. S, 245 B'way, N.Y.

TYPEWRITERS.—Hammond, \$10; Remington, \$12; Smith Premier, \$18; Oliver, \$20. All guaranteed for one year. Send for catalogue. Harlem Typewriter Exchange, Dept. B, 217 West 125th Street, New York.

AUTOS.

WANTED.—1,000 CHAUFFEURS AND REPAIR MEN. Our demand for professional automobile engineers exceeds the supply; calls for men of intelligence and mechanical bent, commanding \$100 to \$150 monthly, upon graduation. Resident courses \$15 to \$50. Home correspondence courses in construction and repair, completed by practical road and shop work at any of our branches or affiliated schools, highly successful. Look this up. Auto Schools of America, 1680 Michigan Avenue, Chicago.

WANTED.—To hear from every individual autoist in the States and Canada, requesting our catalogue of specialties and supplies. We make mud splashes, slip covers, top boots, chain boots, spark plugs, tires and tread covers, everything for the auto. Big discounts orders exceeding \$5.00. Jenkins Specialty Mfg. Co., Sumter, S. C.

MOTION PICTURES.

MOTION PICTURE MACHINES. Film Views, Magic Lanterns, Slides and similar wonders for sale. Catalogue free. We also buy Magic Picture Machines, Films, Slides, etc. Harback & Co., 309 Filbert St., Phila., Pa.

THE MOVING PICTURE WORLD, weekly, 10 cents per copy; yearly subscription, \$2. The only paper devoted to the moving picture, illustrated song and lantern lecture field. Moving Picture World, Box 450, N.Y.

WANTED.—Addresses of enterprising men contemplating entering the moving picture business. Biggest paying proposition for small capital known. Write for information. The Actograph Co., 50 Union Square, N.Y.

BOOKS AND MAGAZINES.

ELECTRICIAN AND MECHANIC.—Practical monthly magazine for electrical and mechanical students and workers. Publishes illustrated directions for constructing dynamos, motors, gasoline engines, wireless telegraphy, electroplating, electrical wiring, mechanical drawing, using tools, furniture construction, boat building, all kinds of mechanical work. One dollar yearly; trial subscription for three months, twenty cents. List of electrical and mechanical books free. S. A. Sampson Pub. Co., 6 Beacon St., Boston, Mass.

INSTRUCTION

AUTOMOBILE SCHOOL TERMS \$15 a week, day and night, every late make of car to work on—particulars mailed. Automobile Sales Corporation, 1661 Broadway, New York.

PHOTOGRAPHY.

AMERICAN PHOTOGRAPHY succeeds American Amateur Photographer, Camera and Dark Room and Photo Beacon. The editors of each now join in making a magazine which should be in the hands of every photographer, professional or amateur. 15 cents monthly, \$1.50 per year. Three specimen copies for a quarter. Am. Photographic Pub. Co., 361 Broadway, New York.

TALKING MACHINE NEEDLES.

I SEND FREE, samples of patented improved Petmecky Multi-tone Needles to all interested in talking machines. Each needle plays 10 records. Millions sold weekly. Pet mecky, 348 Broadway, New York.

is worked at high pressures and speeds, the water is unable to follow the propeller, the motions cease to be similar, cavitation sets in forward of the full-sized propeller, and, of course, the law of comparison does not apply.

The thrust and power of the full-sized propeller are very much less after cavitation is set up than would be inferred from model experiments by using the law of comparison.

Parsons, with a proper understanding of the necessary conditions, has made some investigations of cavitation by testing model propellers in water nearly at the boiling point, so that the pressures around them are properly reduced. He found that a model propeller, which would not cavitate in cold water, would promptly show cavitation when the pressure was properly reduced by heating the water. In this case, as in many other cases, in applying model basin results to practice, it is necessary to understand the underlying conditions and circumstances before the methods are applicable.

From model basin experiments we are able to determine more accurately than by any other known method at present the effective horse-power required to pull a ship through the water. But what we need to estimate in practice is the indicated horse-power required to be shown by the propelling machinery in order to drive the ship. The conditions are somewhat complicated. Of the indicated horse-power shown in the cylinders of a reciprocating engine, a varying proportion is absorbed in friction of the machinery itself, the remainder being delivered to the propeller. The propeller utilizes a certain proportion of the power which reaches it, the remainder being wasted. Furthermore, the propeller is not working in undisturbed water, but in the wake which is dragged after the ship and which, acting on the propeller, virtually helps to push the ship ahead, thereby gaining power. But, again, the propeller by its suction tends to suck the ship astern, thereby increasing its resistance. It is on account of these numerous varying factors that we need to establish an average ratio or a utilization coefficient, which is commonly called the efficiency of propulsion and is the ratio between the effective horse-power necessary to pull the ship at a given speed and the indicated horse-power necessary to propel it at the same speed. This ratio can only be satisfactorily established by comparison between numerous trial results of actual ships and model basin results, a fact which renders it of great importance to have accurate trials of full-sized ships whose model results are known.

The efficiency of propulsion is commonly assumed at about 50 per cent for

\$7.50

FOR AN

Accurate Chronograph

DUST and MOISTURE PROOF. WRITE FOR FREE BOOKLET SHOWING OTHER STYLES.



Seems a low price yet is a fact. The New York Standard "Stop-Watch" is the lowest priced one; is the only one made in America, and the only one made anywhere that is Fully Guaranteed. It will pay you to fully investigate them at your Jeweler's.

New York Standard Watch Co., 401 Communipaw Ave., Jersey City, N. J.

Our patterns or materials cost you only half the price asked by others.

BUILD IT YOURSELF

We are the largest builders of pleasure boats in the world. We sell you full size working patterns, knock-down frames and materials from bone-dry stock, at half the price asked by others. We use these patterns and stock every day in building our regular boats. You are not buying theories. Catalog free.

DETROIT BOAT CO., No. 27 Bellevue Ave., DETROIT, MICH.

Convert Your Bicycle Into a Motorcycle

By using one of our Attachable Outfits. Will fit any wheel. Also marine motors for small boats. Finished motors or rough castings for automobile, marine or stationary. Send stamp for catalogue.

STEFFEY MFG. CO., 2941 W. Girard Ave., Phila., Pa.

Write to-day

MOTSINGER AUTO-SPARKER

starts and runs Gas Engines without Batteries.

No other machine can do it successfully for lack of original patents owned by us. No twist motion in our drive. No belt or switch necessary. No batteries whatever, for make and break or jump-spark. Water and dust-proof. Fully guaranteed.

MOTSINGER DEVICE MFG. CO. 14 Main Street, Pendleton, Ind., U. S. A.

Add TONE to your Stationery in the Office, Bank, School or Home by using only Washburn's Patent Adjustable

"O.K." PAPER FASTENERS

There is genuine pleasure in their use as well as Perfect Security. Easily put on or taken off with the thumb and finger. Can be used repeatedly and "they always work." Made of brass, 3 sizes, put up in brass boxes of 100 Fasteners each. All stationers. Send 10c for sample box of 50, assorted. Booklet free. No 1 B The O. K. Mfg. Co., Dept. X, Syracuse, N. Y.

"ON THE LEVEL"

You see in an instant just "where" your work is out by using the "Which Way" Pocket Level. Size of a silver dollar, 3/16-in. thick, neatly nickelled. Sample for twenty-five 2-cent stamps. For Catalog free, E. G. SMITH CO., Columbia, Pa.

Liberal Inducements to Agents.

WELL DRILLING Machines

Over 70 sizes and styles, for drilling either deep or shallow wells in any kind of soil or rock. Mounted on wheels or on skids. With engines or horse powers. Strong, simple and durable. Any mechanic can operate them easily. Send for catalog.

WILLIAMS BROS., Ithaca, N. Y.

American Homes and Gardens

HISTORIC MANSIONS of THE JAMES RIVER



EVELYN BYRD

SEPTEMBER, 1907

I. "Brandon," the Home of the Harrisons.

OCTOBER, 1907

II. "Shirley," the Home of the Carters.

NOVEMBER, 1907

III. "Westover," the Ancestral Home of the Byrds.

THIS series deals with three of the most beautiful colonial estates along the charming and historic James River. The illustrations are made from photographs taken especially for the purpose by an expert. The series is of unusual interest and beauty. Subscriptions can begin with the September number. Price \$3.00 per year. The three numbers will be sent on publication on

receipt of 75 cents. Among the interesting articles in the October number are:

NINETEENTH CENTURY BEDROOMS
HOW TO TOUR IN AN AUTOMOBILE
GARDENING WITHOUT SOIL

SMALL AMERICAN HOMES
PORT SUNLIGHT
MILLBROOK FARM

All these articles are beautifully illustrated. 72 large pages, colored cover changing each month.

MUNN & COMPANY, Publishers Scientific American
Office: 361 Broadway, New York City



MORGAN & WRIGHT GAS ENGINE BAGS

are of the superior grade which marks their entire line of products. Standard or special sizes for any required horse power furnished promptly.

Molded Rubber Specialties

We wish to call attention to our exceptional facilities for producing molded specialties of all kinds for new and old inventions. We have specialized on this line of work for years, and have developed superior equipment and experience which we place at your service: Pump Valves and Valve Discs for high and low pressure; Diaphragms for Heaters and Pumps; Printing Contact Mats for Blue Print work.

We solicit an opportunity to figure on these or any other class of molded specialties.

MORGAN & WRIGHT
Manufacturers of Good Rubber Goods
14 Bellevue Avenue, Detroit, Mich.

Manufacturers!

Investigate

Portsmouth, Virginia

Portsmouth offers unequalled advantages for the profitable operation of almost any manufacturing industry. It is the natural gateway between the resources and markets of the North and South, drawing from and catering alike to both. Cheap fuel at the very door, an abundance of reliable labor and an inexhaustible supply of raw material. Nine lines of railway and a score of lines of water transportation assure exceptionally low freight rates. A delightfully even climate, pure water, good schools, good health and beautiful homes.

Splendid factory sites and business opportunities are now available. Valuable assistance will be given investigators. Full particulars on request. Address I. T. VAN PATTEN, SECRETARY, PORTSMOUTH, VIRGINIA.

HOME MADE DYNAMOS. — SCIENTIFIC AMERICAN SUPPLEMENTS 161 and 600 contain excellent articles with full drawings. Price 10 cents each, by mail, Munn & Company, 361 Broadway, New York City, and all newdealers.

WHAT GIFT WILL BE LONGER TREASURED THAN WEBSTER'S INTERNATIONAL DICTIONARY?

USEFUL. A constant source of knowledge. It answers your questions on new words, spelling, pronunciation, etc.; also questions about places, noted people, foreign words, and many other subjects.

BELIEVABLE. Ed. in Chief W. T. Harris, for 17 years U.S. Comm. of Ed'n. Recently added 25,000 New Words. Revised Gazetteer, and Biographical Dictionary. Constant editions keep the volume abreast of the times. 9360 Pages. 5000 Illustrations.

AUTHORITATIVE. It is the standard of the Federal and State Courts, the Schools, and the Press. THIS CANNOT BE TRULY SAID OF ANY OTHER DICTIONARY.

ATTRACTIVE AND LASTING. The various bindings are rich and durable and the paper and printing are superior.

It is the Best Christmas Gift.

WEBSTER'S COLLEGIATE DICTIONARY. Largest of our abridgments. Regular and Thin Paper Editions. 1116 Pages. 1400 Illustrations.

Write for Dictionary Wrinkles, Free.
G. & C. MERRIAM CO., Springfield, Mass.
GET THE BEST.

60 YEARS' EXPERIENCE

PATENTS

TRADE MARKS
DESIGNS
COPYRIGHTS & C.

Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. HANDBOOK on Patents sent free. Oldest agency for securing patents. Patents taken through Munn & Co. receive special notice, without charge, in the

Scientific American.

A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, \$3 a year; four months, \$1. Sold by all newdealers.
MUNN & Co. 361 Broadway, New York
Branch 1115 F St., Washington, D. C.

the purpose of estimating, and, in the usual run of cases, it should not fall below that figure. This per cent, moreover, is usually based upon the effective horse-power of the bare hull of the ship. In practice, for vessels with unusually efficient machinery and few appendages, the efficiency of propulsion thus figured may rise as high as 60 per cent. But it is hardly safe when making estimates to rely upon such a high figure, it being obviously desirable to provide a reasonable margin.

It will be evident from the nature of the case that the accumulated records of experiments of the model basin increase in value as they increase in number, and after several years of systematic experimentation it is possible from the records of the United States model basin without making and trying a model to make a fair approximation to results to be expected of almost any normal type of vessel. Fig. 3 illustrates such a case. Suppose we wish to determine for an Atlantic liner of 40,000 tons displacement and 800 feet in length the approximate curves of effective horse-power according as the boat is made with a fine cylindrical coefficient or a full cylindrical coefficient. The cylindrical coefficient is the ratio between the actual submerged volume of the vessel and the cylindrical volume obtained by multiplying the area of the mid-ship section by the length of the vessel. After displacement and length the cylindrical coefficient is the most important variable affecting resistance. The area of and hence the power absorbed by the wetted surface depend almost entirely upon the displacement and the length, and we are enabled to draw one curve of frictional effective horse-power, it being the same in the first approximation for any cylindrical coefficient. From accumulated data of systematic experiments we are able to further calculate curves of residuary horse-power for the various coefficients, which, added to the curve of frictional horse-power, give the curves of Fig. 3. In developing for an actual vessel of the size and length the most desirable lines we could improve somewhat upon the results of Fig. 3, but not very much. It is seen that up to any speed which might be regarded at present within the realm of possibility, say, up to 30 knots, the friction is the main factor. This is generally true; that is to say, there are very few vessels where the residuary resistance is greater than the frictional resistance. A few high-speed navy cruisers, torpedo boats, and torpedo-boat destroyers, and fast passenger vessels for short runs may have residuary resistance greater than the frictional resistance. Even for fast vessels, as a rule, the residuary resistance is not more than a third of the total, or one-half the frictional resistance. Excessive residuary resistance means that the vessel is too short for her speed, and it can be reduced by increasing length without much increase in frictional resistance.

It will be observed in Fig. 3 that at practicable speeds there is much more difference in total effective horse-power between cylindrical coefficients of 0.60 and 0.65 than between 0.55 and 0.60. At 0.55 we are close to the minimum. It will also be observed that at the top speed the curve for the 0.55 coefficient is beginning to rise beyond that for 0.60 coefficient. This is typical. Numerous experiments have shown that for speeds which are moderate in proportion to the length of the vessel the cylindrical coefficient should be low; while for speeds which are high in proportion to the length, say, speeds in knots twice or more the square root of the length in feet, the cylindrical coefficient may be given with advantage surprisingly large values, as high as 0.65 or 0.66. For excessive speeds, at which the vessel begins to rise bodily from the water, the cylindrical coefficient may be made even greater, or, in other words, the ends may be made very full.

WINCHESTER



TAKE-DOWN REPEATING SHOTGUNS

It is an easy matter to pay a fancy price for a shotgun, but money won't buy a better shooting or more serviceable all round gun than the regular \$27.00 grade Winchester Repeating Shotgun. These guns shoot close and hard, work surely and wear well. They are made in 12 and 16 gauges and can be furnished with extra interchangeable barrels of different styles of bore at a small cost. Ask your dealer about them.

Winchester Guns and Winchester Ammunition are Sold Everywhere.

WINCHESTER REPEATING ARMS CO. • NEW HAVEN, CONN.

LET US BE YOUR FACTORY

We estimate on anything you want made to order. STAMPINGS, MODELS, EXPERT WORK

We publish "The Silent Partner," a brainy little magazine, full of good thoughts. Sample free. Write us. THE GLOBE MACHINE AND STAMPING CO. 970 Hamilton St., Cleveland, O.

ICE MACHINES Corliss Engines, Brewers' and Butchers' Machinery. THE VILTOR MFG. CO., 899 Clinton St., Milwaukee, Wis.

MODELS & EXPERIMENTAL WORK. Inventions developed. Special Machinery. E. V. BAILLARD, 24 Frankfort Street, New York.

RUBBER Expert Manufacturers Fine Jobbing Work PARKER, STEARNS & CO., 228-229 South Street, New York

MODELS & GEARS INVENTIONS PERFECTED UNION MODEL WORKS 193 SO CLARK ST. CHICAGO.

Army Auction Sale Bargains Large 200 page illustrated 1907 Catalogue mailed 15c. (stamps). Francis Bannerman, 501 Broadway, N. Y.

MODELS & EXPERIMENTAL MACHINERY. Gears, Dies, Tools. Novelties manufactured. Fine, Accurate Work a Specialty. M. P. Schell, 1759 Union Street, San Francisco.

HOGGSON'S TIME STAMPS TIME EVERY ACT, OPERATION, OR TRANSACTION. 108 Fulton St., N. Y.

Telegraphy Circular free. Wonderful automatic teacher. 5 styles \$2 up. OMNIGRAPH CO., Dept. 52, 89 Portland St., New York.

Do Your Own Printing \$5 press prints cards, labels, etc. Circular, book, newspaper press \$18. Money saver, maker. All easy. Rules sent. Write factory for press catalog, type, paper, etc. THE PRESS CO., Meriden, Conn.

WRITE FOR OUR 170 PAGE BOOK ON ELECTRICITY FREE We will send you with it our special plan by which you can secure absolutely free any article in our big catalogue JULIUS ANDRAE & SONS CO. 1005 West Water Street, Milwaukee, Wis.

CEMENT BOOKS. How to Use Portland Cement 50c.; Cement Sidewalk Construction, 50c.; Reinforced Concrete Construction, \$2.50; Hollow Concrete Block Building Construction, 50c. Sent postpaid. CEMENT AND ENGINEERING NEWS, Chicago, Ill.

TECHNICAL LITERATURE

917 St. Paul Building, NEW YORK.

SEALED PROPOSALS.

SEALED PROPOSALS will be received at the office of the Light-House Engineer, Tompkinsville, New York, until 1 o'clock P. M., Dec. 16, 1907, and then opened, for furnishing two fourth order lanterns for Honolulu Range Light-Station, Hawaii, in accordance with specifications, copies of which, with blank proposals and other information, may be had upon application to the Light-House Engineer, Tompkinsville N. Y.

SETS OF CASTINGS OF MODEL ENGINES SEND 10¢ FOR 126 PAGE ILL. CATALOGUE. ALSO TOOLS GEAR WHEELS & PARTS OF MODELS. GOODNOW & WIGHTMAN. Removed to 182 Milk Street.

PATTERN MAKER

Wood and Metal Patterns. Experimental Work. ERNEST A. FUCHS, 113 Plymouth St., Jersey City, N. J.

YOUR ENGINEER

AMUSEMENT ATTRACTIONS A SPECIALTY. Ideas and Inventions receive expert and prompt attention. Plans, Specifications, Superintendence and Reports for all classes of Mechanical and Electrical Appliances. F. L. Newell, Engineer, 1 Madison Ave., N. Y.

HOW TO MAKE ELECTRICAL BOOKS

Full Directions and Working Drawings. 20. An Ammeter. 21. A Thermostat. 25. An Electric Furnace. 22. Motor Rotation. 26. A Hand Feed Arc Lamp. 23. An Electric Soldering Iron. 27. A Jump Spark Coil. 24. A Small Electric Heater. 28. A Rheostat. BUBIER PUB. CO., Dept. S, Lynn, Mass. each.

GAS ENGINE DETAILS.—A VALUABLE and fully illustrated article on this subject is contained in SUPPLEMENT NO. 1292. Price 10 cents. For sale by Munn & Co. and all newdealers.

ELECTRIC FLASH LIGHT for 50c. Battery capacity 5000 flashes. Intense white light. Renewal battery 20c. Write for 90 page Free Encyclopedia. Has experiments on Wireless, Coils, Electric Photographs, etc. Electro Importing Co., 87 Warren St., N. Y.

ANY ONE CAN PLAY ANY GUITAR WITH IT IN 10 MINUTES. Write ALBERT PIETSCH. 605 Cedar Street, Milwaukee, Wis.

ELECTRIC GOODS FOR CHRISTMAS. Catalog of 200 Novelties Free. If it's Electric we have it. Big Catalog 4c. OHIO ELECTRIC WORKS, CLEVELAND, OHIO. The World's Headquarters for Dynamos, Motors, Fans, Toys, Batteries, Belts, Bells, Lamps, Books. We Undersell All. Want Agents.

Condenses the best articles of general technical interest from all sources—thirty to forty every month—and indexes all the rest. Keeps you informed regarding all branches of industrial progress. The most instructive periodical for engineers and the general reader. \$2.00 per year, 20 cents per copy. Send 25 cents for a two months' trial subscription.

NOT FOR FARMERS ONLY

The Country Gentleman

is not only
The Leading Journal of Agriculture
and positively
The ONLY Agricultural NEWSpaper
but also

The one weekly devoted to country life which no suburban resident and no city owner of a country place can afford to be without


Subscription, \$1.50. Four Months' Trial, 50c.

AGENTS WANTED EVERYWHERE

SPECIMEN COPIES FREE.

It will pay anybody interested in any way in country life to send for them. Address the publishers:

LUTHER TUCKER & SON, Albany, N. Y.



Rubber Pump Valves

For Cold and Hot Water, Oils, Acids, High Pressure Mine Service and for every pumping requirement. * * *

Mechanical Rubber Goods of every description of unsurpassed qualities, including BELTING, HOSE PACKINGS, Gaskets, Mats and Matting, Tubings, Springs, Interlocking Tiling, Emery Wheels and MOULDED and CUT SPECIALTIES for any mechanical and commercial device. * * *

NEW YORK BELTING & PACKING COMPANY, Ltd.
91 & 93 Chambers Street, New York

Scales All varieties at lowest prices. Best Railroad Track and Wagon or Stock Scales made. Also 1000 useful articles, including Saws, Sewing Machines, Bicycles, Tools, etc. Save Money. Lists Free. CHICAGO SCALE CO., Chicago, Ill.



A Desirable Holiday Gift DRAPER'S Recording Thermometer

Traces automatically a correct and continuous record in ink of the temperature on a graduated weekly chart. Made in two sizes, and standardized and fully guaranteed. Also other weather recording instruments.

THE DRAPER MFG. CO.
152 Front St., New York



EVER NEED DUPLICATES

Of Form Letters, Price Lists, Bills, Invoices, Drawings, Menus, Reports, anything! Then take advantage of our offer of ten days' trial, without deposit, and become one of thousands of satisfied customers who all agree that Daus' Improved Tip Top is the simplest, easiest and quickest method of duplicating on the market. 100 copies from Pen-written and 50 copies from Typewritten Original. If you have tried other duplicators without success, you will be more than pleased with ours. Complete \$7.50

Duplicator, cap size (prints 8 x 18 in.).
FELIX U. DAUS DUPLICATOR CO., Daus Bldg., 113 John St., New York.

Bausch & Lomb

Analytical Chemicals

are recognized as "Standard" by scientific men everywhere, and are used in the leading laboratories. We shall be glad to send catalogs and estimates upon request.

"Prism" IS A LITTLE MAGAZINE we publish monthly, beautifully made and printed, and we will enter your subscription FREE.

Bausch & Lomb Optical Company, Rochester, N. Y.
New York Boston Washington Chicago San Francisco

2 H.P. Detroit Engine

Starts without cranking; no cams, valves, springs or sprockets. Only 3 moving parts. All bearings bab-bitized. For your Row Boat, Sail Boat, Launch. Send for testimonials. SEND FOR FREE CATALOG.

For \$29.50

2-5-7-10 H. P. Proportionate prices. Cylinders and pistons ground. Crank shaft drop forged steel. All sizes ready to ship.

DETROIT ENGINE WORKS,
1332 Jefferson Ave., Detroit, Mich

A SUBSTITUTE FOR A COSTLY TOOL

Our Key Seat Clamps as shown in cut are designed to transform any common steel scale into a Key Seat Rule. Made from steel, case hardened, accurately ground. One pair weighs only one ounce. Can be put on or off almost instantly. May be used with combination square blades, or with any straight rule with accurate results. Price per pair 60c. Send for 232 page catalog No. 18-B.

THE L. S. STARRETT CO., Athol, Mass., U. S. A.

LUFKIN
TAPES AND RULES
ARE THE BEST.
For sale everywhere. Send for Catalog No. 16.

LUFKIN RULE CO.
Saginaw, Mich., U. S. A.
New York and London.

IT PAYS BIG TO amuse the Public With Motion Pictures

NO EXPERIENCE NECESSARY as our instruction Book and "Business Guide" tells all. We furnish Complete Outfits with Big Advertising Posters, etc. Humorous dramas brimful of fun, travel, history, religion, temperance work and songs illustrated. One man can do it. A remarkable opportunity in any locality for a man with a little money to show in churches, school houses, lodge halls, theatres, etc. Big profits each entertainment. Others do it, why not you? It's easy; write to us and we'll tell you how. Catalogue free.

AMUSEMENT SUPPLY CO., 467 Chemical Bank Bldg., CHICAGO.

VICTOR II \$30
Other styles \$10 to \$100

SEMBRICH **MELBA** **CALVE**

HOMER **SCHUMANN-HEINK**

All that's best in music is yours on the VICTOR

It is the only instrument that the most celebrated artists find worthy to bring their voices into your home. Surely, then, no other but the Victor, with its unequalled, loud, clear, sweet, musical tone-quality, is good enough for you!

Ask your dealer to play the VICTOR for you, and to tell you how you can buy it on easy terms.

VICTOR TALKING MACHINE CO.
Camden, N. J. U. S. A.
Beltsville Gramophone Co. of Montreal, Canadian Distributors

Every month, promptly on the 28th—the same date everywhere throughout the United States—the new Victor records for the following month are placed on sale. The latest music and the best.

THE YOUTH'S COMPANION

For 1908

The Best Christmas Present for \$1.75



The 52 issues for 1908 will give as much reading for \$1.75 as twenty 400-Page books of fiction, history, etc., ordinarily costing \$1.50 each.

250 Capital Stories; 350 Articles and Sketches; 2000 One-Minute Stories; 1000 Notes on Nature and Science; Weekly Medical Article, etc.


Christmas Present Coupon.

New Subscribers who at once cut out and send this slip (or mention this publication) with \$1.75 for the fifty-two issues of 1908 will receive

Gift 1. All the issues of the paper for the remaining weeks of 1907, including the Beautiful Holiday Numbers.
Gift 2. The Companion's 4-Leaf Hanging Calendar for 1908 in Full Color—exclusively for Companion subscribers. Then The Companion for the fifty-two issues of 1908—a library in itself. .1127

Send for sample copies of the paper and illustrated Announcement for 1908.
THE YOUTH'S COMPANION, BOSTON, MASS.

Expansion Bolts



CATALOG AND SAMPLES ON REQUEST
Star Expansion Bolt Co., Trask Ave. & 2d St., Bayonne, N. J.

COLD GALVANIZING.
AMERICAN PROCESS. NO ROYALTIES.
SAMPLES AND INFORMATION ON APPLICATION.

Established 1820.

NICKEL
Electro-Plating
Apparatus and Material.
THE
Hanson & Van Winkle Co.,
Newark, N. J.
28 & 30 S. Canal St.
Chicago.

UNIVERSITY SHOE

(Trade-Mark.)
Heaviest oily grain leather—tan colored. Watertight construction. Comfortable and nearly indestructible. Send for pamphlet.
P. TWADDELL,
1210-1212 Market St., Philadelphia

The Famous
Turco-American
GLASS PIPE

At last the perfect Pipe—the pipe that it is a delight to smoke—that never bites, and that is free from the rank odors which women so detest about the house. The man who says he cannot smoke a pipe CAN smoke this one—and with the keenest pleasure that tobacco ever gave.

It is made of specially annealed glass—unbreakable, Non-Absorbent and readily Cleanable, with an inner vent-bowl of ingenious construction, allowing every grain of the tobacco to be burned to a dry ash—and drawing the nicotine away from mouth contact. That does away with the nasty little heel of nicotine-oaked residue with its bad odor and torrid biting taste. It is the only pipe in the world that remains cool throughout—whose last whiff is as sweet as the first.

Smoke it for a week on trial. Your money back then if not satisfied. In ordering state preference for straight or curved stem.

Price, \$1.50
(with case \$2.00) postpaid in U. S. and Canada—Foreign Countries add postage. Send for free booklet "The History of Smoking"

TURCO-AMERICAN PIPE CO.
291 South Ave., Rochester, N. Y.
Reference National Bank of Commerce, Rochester.

The "Best"
The World's Best Light
Sold in every civilized country on earth. Costs less than kerosene, gives six times more light than electricity.
A Pure White Steady Light
Makes and burns its own gas. No wick, no odor, no smoke. Absolutely safe. For indoor and outdoor use.
Agents Wanted,
Exclusive territory, liberal commissions. Catalog free.
THE BEST LIGHT CO.
Owners of Original Patents.
87 E. 5th St. CANTON, OHIO.

There is Beauty in a Litholin Collar

comfort and economy. Being waterproofed linen they look like linen—and when soiled, a damp cloth will wipe them as clean and white as when new. Litholin Collars and Cuffs make

An Ideal Christmas Gift
Collars 25c. Cuffs 50c.

For traveling and daily use they add comfort. Do not crack, wilt, nor fray. If not at dealers, send style, size, number wanted, with remittance, and we will mail, postpaid. Catalogue of new styles, free on request

THE FIBERLOID CO., Dept. 23
7 Waverley Pl., N. Y.


LITHOLIN
WATERPROOFED LINEN

HELMET OIL

LUBRICATES FOR ANYTHING
SEND FOR SAMPLE FREE
15-21 S. CLINTON ST.
CH. BESLY & CO. FINEST U.S.A.

In Good Times or In Bad Times Life Insurance In The Prudential Is Always Certain and Secure.

The Prudential Policy
Protects the Family,
Guards the Home,
Provides Ready Cash.

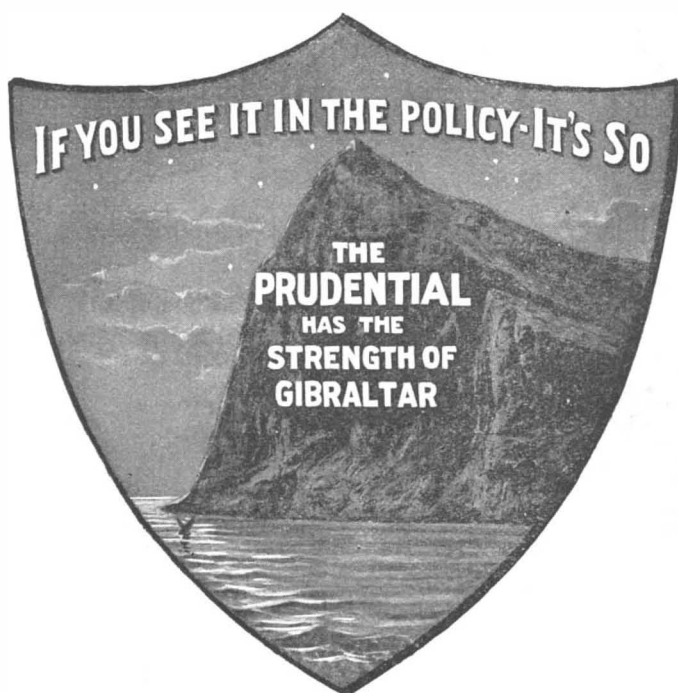

A Magnificent Contract,
All Guaranteed.
Nothing Like It Offered
Before.

OVER 25,000 PEOPLE HAVE BOUGHT The New Low Cost Policy of The Prudential

Endorsed by Business and Professional Men
NORTH—SOUTH—EAST—WEST

The Greatest Success in Life Insurance. Public Pleased, Agents Enthusiastic

THIRTY MILLION DOLLARS

of Ordinary Life Insurance Issued in the First Fifteen Weeks Shows the Popularity
of the New Low Cost Policy.

Send your age nearest birthday for rates and full
particulars. Address Department 121


The Prudential Insurance Company of America

Incorporated as a Stock Company by the State of New Jersey

JOHN F. DRYDEN, President

Home Office: Newark, N. J.

DO YOU WANT TO MAKE MONEY? Splendid Opportunities in Selling this Popular New Ordinary Policy. Write direct to us to-day. Address Dept. 121

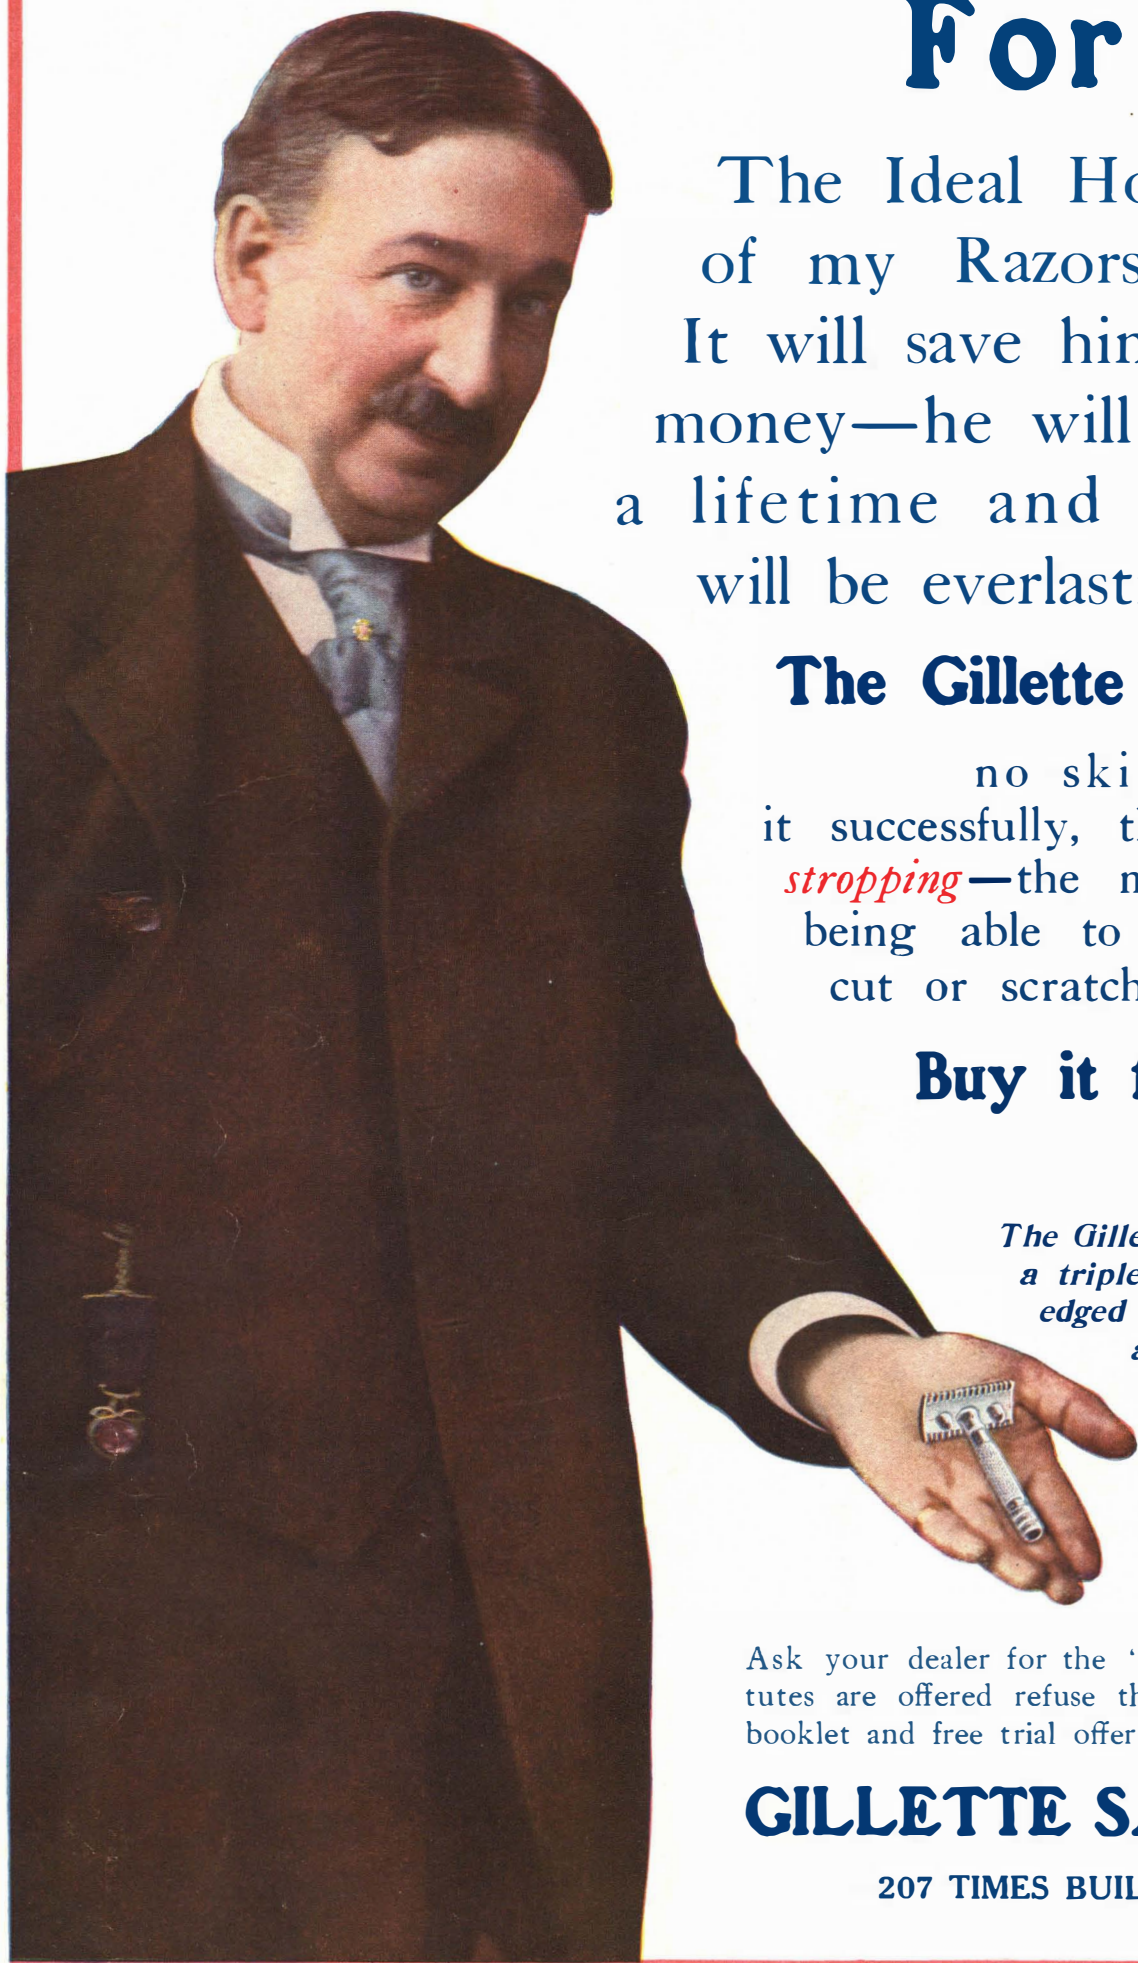

For him

The Ideal Holiday Gift is one of my Razors—the “*Gillette.*” It will save him time—save him money—he will appreciate it for a lifetime and his gratefulness will be everlasting—because with

The Gillette Safety Razor

no skill is required to use it successfully, there is—*no honing—no stropping*—the most inexperienced man being able to shave himself without cut or scratch.

Buy it for him to-day

King Gillette

The Gillette Safety Razor Set consists of a triple silver plated holder, 12 double-edged blades, 24 keen edges, packed in a velvet lined leather case and the price is \$5.00 at all the leading Jewelry, Drug, Cutlery, Hardware and Sporting Goods Dealers.

**COMBINATION SETS
FROM \$6.50 to \$50**

Ask your dealer for the “GILLETTE” to-day. If substitutes are offered refuse them and write us at once for our booklet and free trial offer.

GILLETTE SALES COMPANY

207 TIMES BUILDING, NEW YORK CITY

Gillette Safety Razor
NO STROPPING NO HONING

